


2026 Marin Kentfield 2 ST - Geometrical Chart

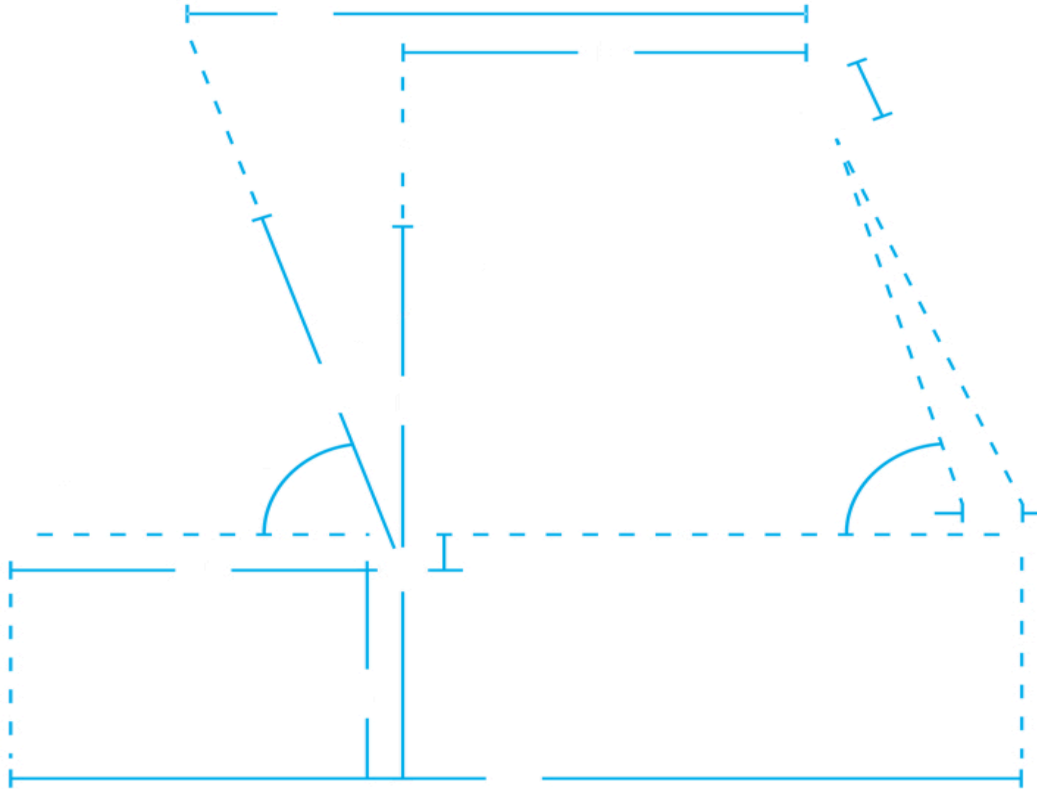

| Geometry | S | M | L |
|---------------------|-------|--------|-------|
| A Stack | 615 | 633.6 | 648.4 |
| B Reach | 375 | 380 | 400 |
| C Headtube angle | 70° | 70° | 70° |
| D Headtube length | 170 | 190 | 205 |
| E Seattube length | 381 | 422 | 462 |
| F Seattube angle | 73.5° | 73.5° | 73.5° |
| G Toptube effective | 557 | 567.7 | 591.9 |
| H Bb height | 294.5 | 294.5 | 294.5 |
| I Bb drop | 70 | 70 | 70 |
| J Chainstay | 450 | 450 | 450 |
| K Wheelbase | 1071 | 1082.9 | 1108 |

| Geometry | S | M | L |
|---------------------|----------|----------|----------|
| L Standover height | 499 | 510.61 | 523.8 |
| M Fork offset | 50 | 50 | 50 |
| N Seatpost diameter | 27.2 | 27.2 | 27.2 |
| O Handlebar width | 680 | 680 | 740 |
| P Stem length | 45 | 45 | 45 |
| Q Crank length | 170 | 170 | 175 |