


2026 Marin Muirwoods - Gold - Geometrical Chart

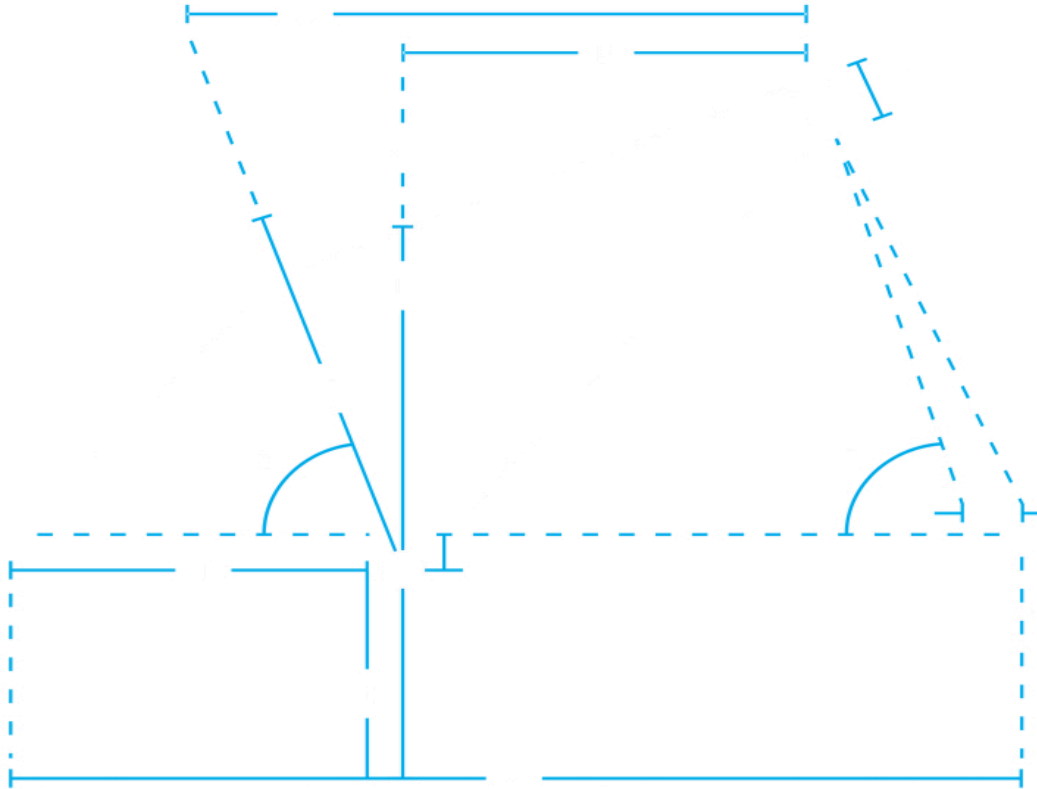

| Geometry | S | M | L | XL |
|---------------------|--------|--------|--------|--------|
| A Stack | 527.7 | 545.8 | 563.9 | 582 |
| B Reach | 430 | 450 | 475 | 505 |
| C Headtube angle | 65° | 65° | 65° | 65° |
| D Headtube length | 130 | 150 | 170 | 190 |
| E Seattube length | 380 | 430 | 480 | 520 |
| F Seattube angle | 76° | 76° | 76° | 76° |
| G Toptube effective | 561.5 | 586.1 | 615.6 | 650.1 |
| H Bb height | 308.5 | 308.5 | 308.5 | 308.5 |
| I Bb drop | 55 | 55 | 55 | 55 |
| J Chainstay | 425 | 425 | 425 | 425 |
| K Wheelbase | 1121.5 | 1149.9 | 1183.4 | 1221.8 |

| Geometry | S | M | L | XL |
|---------------------|----------|----------|----------|-----------|
| L Standover height | 642.7 | 686.3 | 726.9 | 750.1 |
| M Fork offset | 45 | 45 | 45 | 45 |
| N Seatpost diameter | 30.9 | 30.9 | 30.9 | 30.9 |
| O Handlebar width | 780 | 780 | 780 | 780 |
| P Stem length | 35 | 35 | 35 | 35 |
| Q Crank length | 170 | 170 | 170 | 170 |