


2027 Scott Scale 60 Bike Geometry

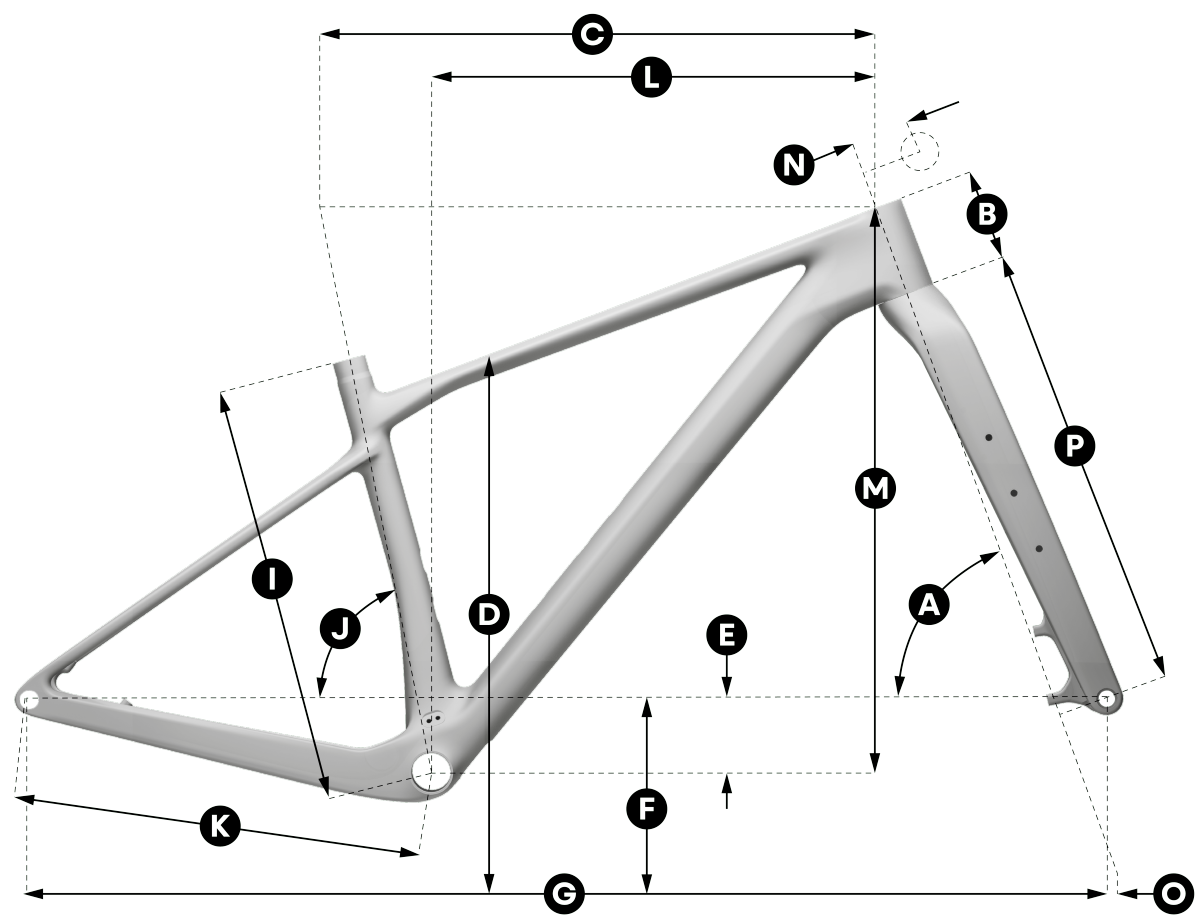

Geometry in mm

|   |                     | XS       | S        | M        | L        | XL       | XXL      |
|---|---------------------|----------|----------|----------|----------|----------|----------|
| A | head tube angle     | 67.4 °   | 67.4 °   | 67.4 °   | 67.4 °   | 67.4 °   | 67.4 °   |
| B | head tube length    | 90.0 mm  | 90.0 mm  | 100.0 mm | 110.0 mm | 120.0 mm | 120.0 mm |
| C | top tube horizontal | 555.0 mm | 575.0 mm | 600.0 mm | 625.0 mm | 655.0 mm | 675.0 mm |
| D | standover height    | 745.0 mm | 755.0 mm | 786.0 mm | 805.0 mm | 835.0 mm | 870.0 mm |

|   |                                   |            |            |            |            |            |            |
|---|-----------------------------------|------------|------------|------------|------------|------------|------------|
| E | BB offset                         | -60.0 mm   | -60.0 mm   | -60.0 mm   | -60.0 mm   | -60.0 mm   | -60.0 mm   |
| F | BB height                         | 315.0 mm   | 315.0 mm   | 315.0 mm   | 315.0 mm   | 315.0 mm   | 315.0 mm   |
| G | wheel base                        | 1,091.4 mm | 1,111.8 mm | 1,138.2 mm | 1,164.6 mm | 1,195.9 mm | 1,215.9 mm |
| H | BB center to toptube center       |            |            |            |            |            |            |
| I | BB center to top of seattube      | 360.0 mm   | 390.0 mm   | 440.0 mm   | 480.0 mm   | 530.0 mm   | 580.0 mm   |
| J | seat angle                        | 75.0 °     | 75.0 °     | 75.0 °     | 75.0 °     | 75.0 °     | 75.0 °     |
| K | chainstay                         | 425.0 mm   | 425.0 mm   | 425.0 mm   | 425.0 mm   | 425.0 mm   | 425.0 mm   |
| L | reach                             | 400.3 mm   | 420.3 mm   | 442.8 mm   | 463.3 mm   | 492.9 mm   | 512.9 mm   |
| M | stack                             | 596.1 mm   | 596.1 mm   | 605.3 mm   | 614.6 mm   | 623.8 mm   | 623.8 mm   |
| N | Stem Length / Longueur de potence | 50.0 mm    | 50.0 mm    | 60.0 mm    | 70.0 mm    | 80.0 mm    | 80.0 mm    |
| O | trail                             | 506.0 mm   | 112.6 mm   | 112.6 mm   | 112.6 mm   | 112.6 mm   |            |
| P | Fork length                       | 160.0 mm   | 506.0 mm   | 506.0 mm   | 506.0 mm   | 506.0 mm   | 112.6 mm   |
| Q | Maximum Seatpost Insertion        | 160.0 mm   | 210.0 mm   | 250.0 mm   | 300.0 mm   | 506.0 mm   |            |
| R | #ERROR!                           | #ERROR!    | #REF!      | #ERROR!    | #REF!      | #ERROR!    | #REF!      |

Geometry in Inch

|   |                              | XS      | S       | M       | L       | XL      | XXL     |
|---|------------------------------|---------|---------|---------|---------|---------|---------|
| A | head tube angle              | 67.4 °  | 67.4 °  | 67.4 °  | 67.4 °  | 67.4 °  | 67.4 °  |
| B | head tube length             | 3.5 in  | 3.5 in  | 3.9 in  | 4.3 in  | 4.7 in  | 4.7 in  |
| C | top tube horizontal          | 21.9 in | 22.6 in | 23.6 in | 24.6 in | 25.8 in | 26.6 in |
| D | standover height             | 29.3 in | 29.7 in | 30.9 in | 31.7 in | 32.9 in | 34.3 in |
| E | BB offset                    | -2.4 in | -2.4 in | -2.4 in | -2.4 in | -2.4 in | -2.4 in |
| F | BB height                    | 12.4 in | 12.4 in | 12.4 in | 12.4 in | 12.4 in | 12.4 in |
| G | wheel base                   | 43.0 in | 43.8 in | 44.8 in | 45.8 in | 47.1 in | 47.9 in |
| H | BB center to toptube center  |         |         |         |         |         |         |
| I | BB center to top of seattube | 14.2 in | 15.4 in | 17.3 in | 18.9 in | 20.9 in | 22.8 in |
| J | seat angle                   | 75.0 °  | 75.0 °  | 75.0 °  | 75.0 °  | 75.0 °  | 75.0 °  |

|   |                                   |         |         |         |         |         |         |
|---|-----------------------------------|---------|---------|---------|---------|---------|---------|
| K | chainstay                         | 16.7 in | 16.7 in | 16.7 in | 16.7 in | 16.7 in | 16.7 in |
| L | reach                             | 15.8 in | 16.5 in | 17.4 in | 18.2 in | 19.4 in | 20.2 in |
| M | stack                             | 23.5 in | 23.5 in | 23.8 in | 24.2 in | 24.6 in | 24.6 in |
| N | Stem Length / Longueur de potence | 2.0 in  | 2.0 in  | 2.4 in  | 2.8 in  | 3.1 in  | 3.1 in  |
| O | trail                             | 19.9 in | 4.4 in  | 4.4 in  | 4.4 in  | 4.4 in  |         |
| P | Fork length                       | 19.9 in | 19.9 in | 19.9 in | 19.9 in |         |         |
| Q | Maximum Seatpost Insertion        | 6.3 in  | 8.3 in  | 9.8 in  | 11.8 in |         |         |
| R | #ERROR!                           | #ERROR! | #REF!   | #ERROR! | #REF!   | #ERROR! | #REF!   |