


2027 Scott Spark Rc World Cup Bike Geometry

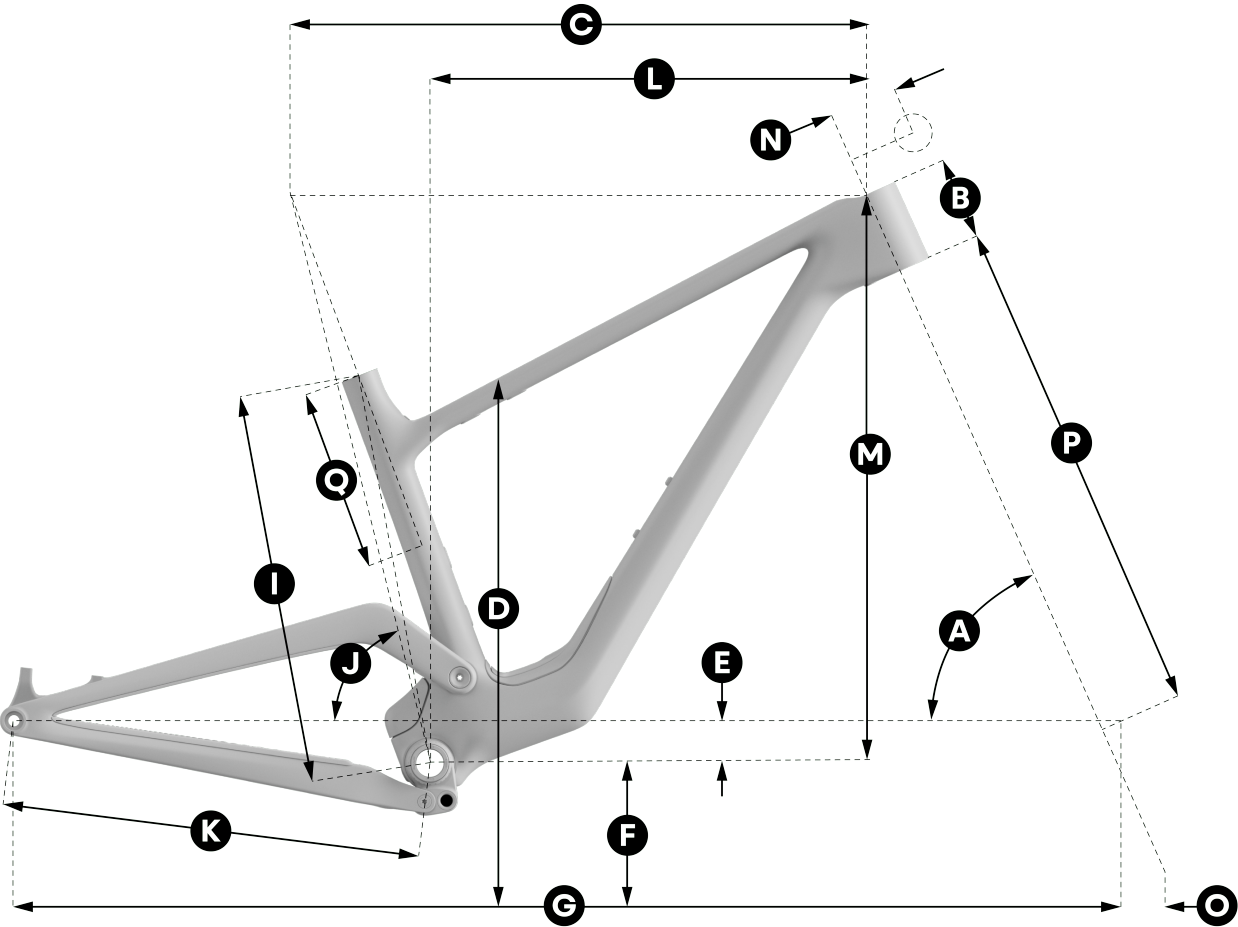

Geometry in mm

SIZE / TAILLE		S	S	M	M	L	L	XL	XL
SETTING / RÉGLAGE	(LOW / BAS)	(HIGH / HAUT)	(LOW / BAS)	(HIGH / HAUT)	(LOW / BAS)	(HIGH / HAUT)	(LOW / BAS)	(HIGH / HAUT)	
A	head tube angle / angle tube de direction	65.5°	65.5°	66.3°	66.3°	65.5°	65.5°	66.3°	66.3°
B		88 mm	88 mm	88 mm	88 mm	95 mm	95 mm	112 mm	112 mm

[illegible]

L	reach / reach	16.9 in	17.0 in	17.9 in	17.9 in	18.9 in	18.9 in	19.9 in	19.9 in
M	stack / stack	23.2 in	23.3 in	23.2 in	23.3 in	23.5 in	23.6 in	24.1 in	24.2 in
O	trail / chasse au sol	4.7 in	4.7 in	4.7 in	4.7 in	4.7 in	4.7 in	4.7 in	4.7 in
P	fork length / longueur fourche	20.9 in	20.9 in	20.9 in	20.9 in	20.9 in	20.9 in	20.9 in	20.9 in
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	11.6 in	11.6 in	12.6 in	12.6 in	14.6 in	14.6 in	16.5 in	16.5 in
N	Stem Length / Longueur de potence	2.0 in	2.0 in	2.4 in	2.4 in	2.8 in	2.8 in	3.1 in	3.1 in
R	Handlebar Width / Largeur de guidon	29.1 in	29.1 in	29.1 in	29.1 in	29.1 in	29.1 in	29.1 in	29.1 in
U	Crankarm Length / Longueur de manivelles	6.5 in	6.5 in	6.7 in	6.7 in	6.7 in	6.7 in	6.7 in	6.7 in
W	Seat post drop / Débattement de tige de selle	4.9 in	4.9 in	5.9 in	5.9 in	5.9 in	5.9 in	5.9 in	5.9 in