


2027 Scott Speedster Gravel 30 Bike Geometry

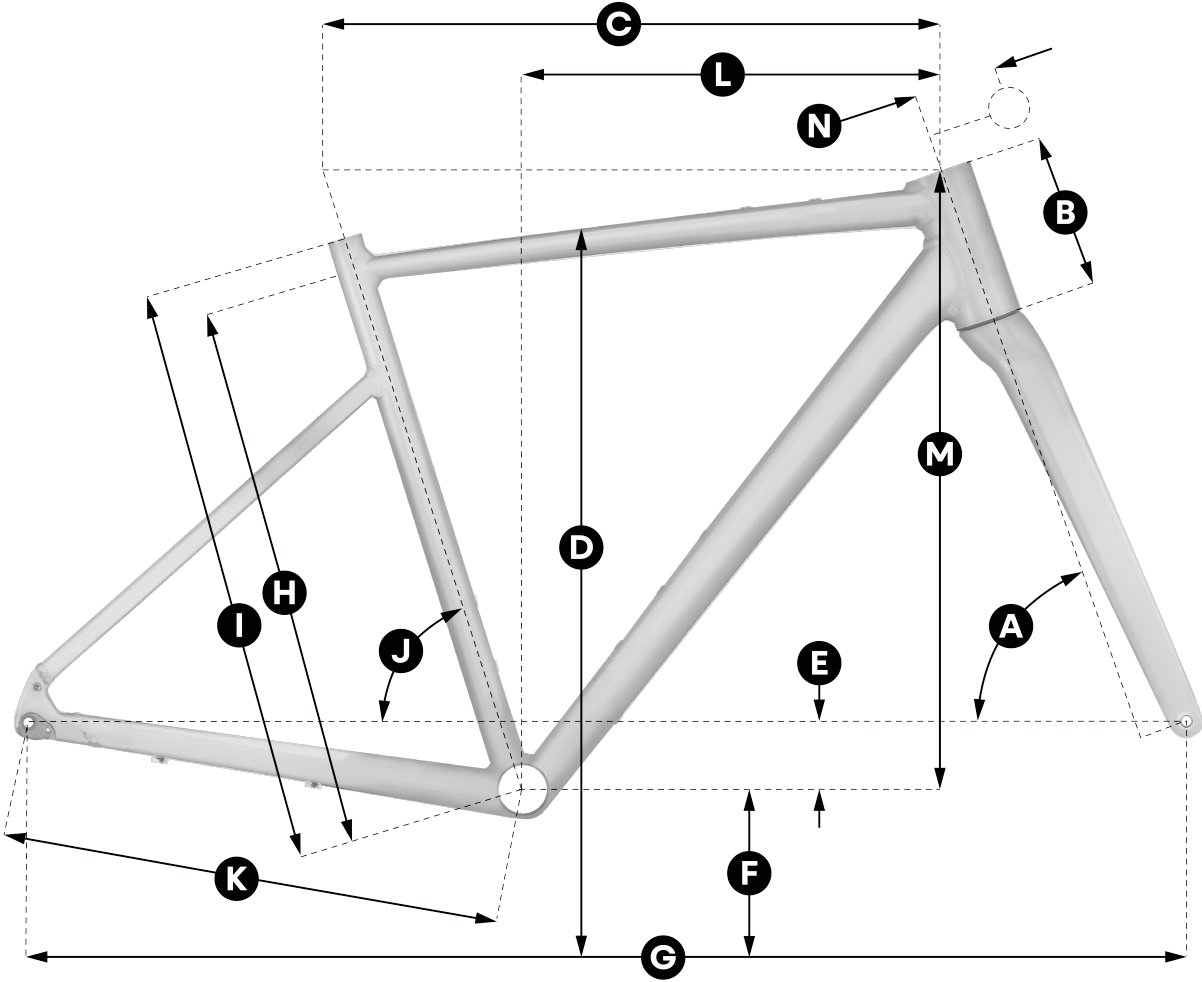

Geometry in mm

		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	head tube angle / angle tube de direction	70.0 °	70.0 °	70.0 °	71.0 °	71.0 °	71.0 °	71.0 °
B		98.0 mm	108.0 mm	128.0 mm	148.0 mm	168.0 mm	188.0 mm	208.0 mm

	head tube length / hauteur tube de direction							
C	top tube horizontal / longueur horizontale tube supérieur	512.6 mm	524.1 mm	538.6 mm	561.1 mm	577.6 mm	587.5 mm	600.4 mm
D	standover height / hauteur entre-jambes	747.0 mm	762.0 mm	786.0 mm	806.0 mm	825.0 mm	844.0 mm	869.0 mm
E	BB offset / exccentrage axe de pédalier	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm
F	BB height / hauteur axe de pédalier	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm
G	wheel base / entraxe roues	1,019.5 mm	1,026.9 mm	1,037.7 mm	1,044.9 mm	1,056.4 mm	1,067.0 mm	1,071.3 mm
H	BB center to toptube center / dist. boitier - milieu tube supérieur	430.0 mm	450.0 mm	480.0 mm	500.0 mm	520.0 mm	540.0 mm	570.0 mm
I	BB center to top of seattube / dist. boitier - sommet tube de selle	470.0 mm	490.0 mm	520.0 mm	540.0 mm	560.0 mm	580.0 mm	610.0 mm
J	seat angle / angle tube de selle	75.0 °	74.5 °	74.0 °	73.0 °	72.5 °	72.5 °	72.5 °
K	chainstay / longueur bases	435.0 mm	435.0 mm	435.0 mm	439.0 mm	439.0 mm	439.0 mm	439.0 mm
L	reach / reach	372.3 mm	376.3 mm	380.3 mm	385.4 mm	390.4 mm	394.4 mm	401.4 mm
M	stack / stack	523.7 mm	533.1 mm	551.9 mm	574.8 mm	593.7 mm	612.6 mm	631.5 mm
N	stem length / longueur potence	73.0 mm	83.0 mm	93.0 mm	103.0 mm	103.0 mm	113.0 mm	113.0 mm

Geometry in Inch

		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	head tube angle / angle tube de direction	70.0 °	70.0 °	70.0 °	71.0 °	71.0 °	71.0 °	71.0 °
B	head tube length / hauteur tube de direction	3.9 in	4.3 in	5.0 in	5.8 in	6.6 in	7.4 in	8.2 in
C	top tube horizontal / longueur horizontale tube supérieur	20.2 in	20.6 in	21.2 in	22.1 in	22.7 in	23.1 in	23.6 in

D	standover height / hauteur entre-jambes	29.4 in	30.0 in	30.9 in	31.7 in	32.5 in	33.2 in	34.2 in
E	BB offset / exccentrage axe de pédalier	-2.8 in	-2.8 in	-2.8 in	-2.8 in	-2.8 in	-2.8 in	-2.8 in
F	BB height / hauteur axe de pédalier	11.1 in	11.1 in	11.1 in	11.1 in	11.1 in	11.1 in	11.1 in
G	wheel base / entraxe roues	40.1 in	40.4 in	40.9 in	41.1 in	41.6 in	42.0 in	42.2 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur	16.9 in	17.7 in	18.9 in	19.7 in	20.5 in	21.3 in	22.4 in
I	BB center to top of seattube / dist. boitier - sommet tube de selle	18.5 in	19.3 in	20.5 in	21.3 in	22.0 in	22.8 in	24.0 in
J	seat angle / angle tube de selle	75.0 °	74.5 °	74.0 °	73.0 °	72.5 °	72.5 °	72.5 °
K	chainstay / longueur bases	17.1 in	17.1 in	17.1 in	17.3 in	17.3 in	17.3 in	17.3 in
L	reach / reach	14.7 in	14.8 in	15.0 in	15.2 in	15.4 in	15.5 in	15.8 in
M	stack / stack	20.6 in	21.0 in	21.7 in	22.6 in	23.4 in	24.1 in	24.9 in
N	stem length / longueur potence	2.9 in	3.3 in	3.7 in	4.1 in	4.1 in	4.4 in	4.4 in