


Geometry Details

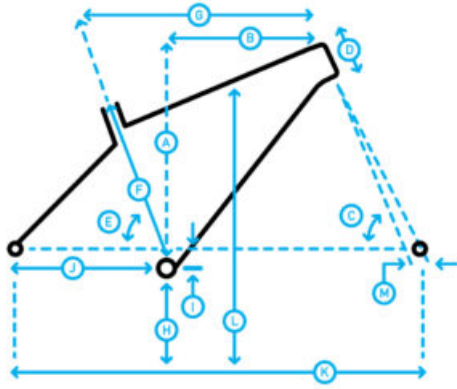

	XS	S	M (27.5)	M (29)	L	XL
A Stack	594.7	599.3	604	629.3	634	638.5
B Reach	420	435	445	445	465	480
C Headtube Angle	67.5°	67.5°	67.5°	67°	67°	67°
D Headtube Length	100	105	110	110	115	120
E Seattube Angle	74.5°	74.5°	74.5°	74.5°	74.5°	74.5°
F Seattube Length	330	381	431	431	482	520
G Toptube Effective	585	601	612.5	619.5	640.8	657
H BB Height	307	307	307	311.5	311.5	311.5
I BB Drop	48	48	48	61	61	61
J Chainstay	425	425	425	440	440	440
K Wheelbase	1116.4	1133.3	1145.2	1177.4	1199.3	1216.3
L Standover Height	639.42	659.07	705.48	714.04	744.93	774.59
M Fork Offset	44	44	44	51	51	51
Seatpost Diameter	30.9	30.9	30.9	30.9	30.9	30.9
Handlebar Width	780	780	780	780	780	780
Stem Length	45	45	45	45	45	45
Crank Length	170	170	175	175	175	175

All lengths in millimeters