


## Geometry Details

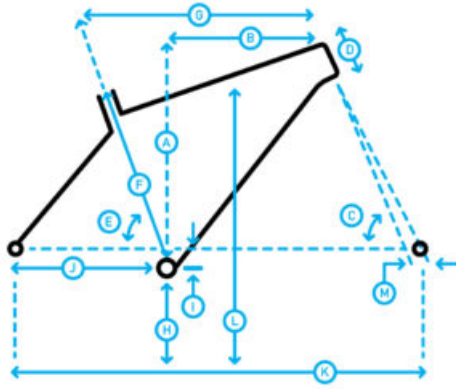

	<b>49</b>	<b>52</b>	<b>54</b>	<b>56</b>	<b>58</b>	<b>60</b>
A Stack	550.3	565.7	581.8	600.8	619.7	638.7
B Reach	370	372.8	372.7	386.4	411.4	425.8
C Headtube Angle	70.5°	71°	71.5°	71.5°	71.5°	71.5°
D Headtube Length	120	135	150	170	190	210
E Seattube Angle	74.5°	74°	73.5°	73.5°	73.5°	73.5°
F Seattube Length	440	470	490	510	530	550
G Toptube Effective	522	535	545	565	595	615
H BB Height	283.5	272	272	272	272	272
I BB Drop	76	76	76	76	76	76
J Chainstay	420	420	420	420	420	420
K Wheelbase	1010.2	1007.4	1007.7	1028.5	1059.2	1079.9
L Standover Height	711	725	741	758	775	792
M Fork Offset	50	50	50	50	50	50
Seatpost Diameter	27.2	27.2	27.2	27.2	27.2	27.2
Handlebar Width	420	420	420	440	440	440
Stem Length	60	60	60	60	70	70
Crank Length	170	170	175	175	175	175

All lengths in millimeters