


## Geometry Details

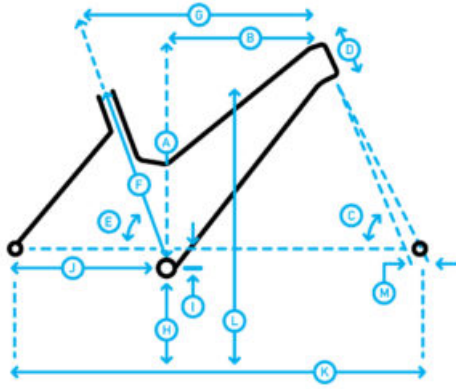

|                     | S      | M      | L      |
|---------------------|--------|--------|--------|
| A Stack             | 590    | 617.7  | 645.8  |
| B Reach             | 380    | 405    | 425    |
| C Headtube Angle    | 69.5°  | 69.5°  | 69.5°  |
| D Headtube Length   | 120    | 150    | 180    |
| E Seattube Angle    | 74°    | 74°    | 74°    |
| F Seattube Length   | 430    | 480    | 520    |
| G Toptube Effective | 549    | 582    | 610.2  |
| H BB Height         | 296.5  | 296.5  | 296.5  |
| I BB Drop           | 45     | 45     | 45     |
| J Chainstay         | 455    | 455    | 455    |
| K Wheelbase         | 1083.4 | 1118.9 | 1149.4 |
| L Standover Height  | 460.19 | 487.35 | 510.57 |
| M Fork Offset       | 44     | 44     | 44     |
| Seatpost Diameter   | 27.2   | 27.2   | 27.2   |
| Handlebar Width     | 720    | 740    | 740    |
| Stem Length         | 45     | 45     | 45     |
| Crank Length        | 170    | 170    | 175    |

All lengths in millimeters