


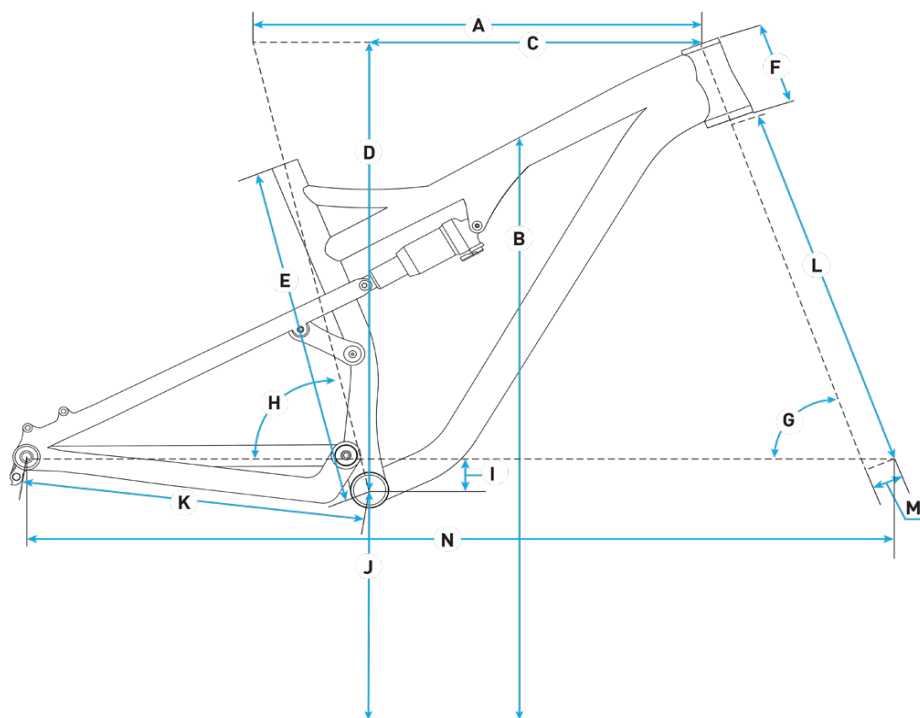

Geometry Chart

Size	SM - 180mm Fork	MD - 180mm Fork	LG - 180mm Fork	XL - 180mm Fork	SM - 170mm Fork	MD - 170mm Fork	LG - 170mm Fork	XL - 170mm Fork
A. Effective Top Tube	596 / 595	619 / 618	642 / 641	665 / 664	595 / 594	617 / 616	641 / 640	664 / 663
B. Stand Over	737 / 740	740 / 743	741 / 744	741 / 744	732 / 734	735 / 738	735 / 738	736 / 739
C. Reach	439 / 443	460 / 463	481 / 484	502 / 505	444 / 447	465 / 468	486 / 489	507 / 510
D. Stack	617 / 615	622 / 619	631 / 628	640 / 637	614 / 612	618 / 616	627 / 625	636 / 634
E. Total Seat Tube Length	405	430	455	480	405	430	455	480
F. Headtube Length	95	100	110	120	95	100	110	120
G. Headtube Angle	63.8 / 64.1	63.8 / 64.1	63.8 / 64.1	63.8 / 64.1	64.2 / 64.5	64.2 / 64.5	64.2 / 64.5	64.2 / 64.5
H. Seat Tube Angle	75.7 / 76.0	75.7 / 76.0	75.7 / 76.0	75.7 / 76.0	76.1 / 76.4	76.1 / 76.4	76.1 / 76.4	76.1 / 76.4
I. BB Drop	19 / 15	19 / 15	19 / 15	19 / 15	22 / 18	22 / 18	22 / 18	22 / 18
K. Chainstay Length	432 / 431	432 / 431	432 / 431	432 / 431	432 / 431	432 / 431	432 / 431	432 / 431
L. Fork Length Axle to Crown	589	589	589	589	579	579	579	579
M. Fork Offset	43	43	43	43	43	43	43	43
N. Wheelbase	1213 / 1212	1236 / 1235	1262 / 1261	1287 / 1286	1209 / 1208	1232 / 1231	1257 / 1257	1283 / 1282
Crank Arm Length	165	165	170	170	165	165	170	170
Handlebar Width	see build kit	see build kit	see build kit	see build kit	see build kit	see build kit	see build kit	see build kit
Recommended Rider Height	165cm-173cm	173cm-180cm	180cm-188cm	188cm-UP	165cm-173cm	173cm-180cm	180cm-188cm	188cm-UP
Stem Length	50	50	50	50	50	50	50	50

Measurements based on:

- an unsprung bike (no sag)
- a 29 x 2.4" tire measuring 746mm in diameter
- Standover is measured from vertically from ground to top of top tube 50mm forward of bottom bracket, subtract

9mm (0.3") for 27.5 x 2.8" tires

- Note: Where two measurements are listed, the first number is with Flip Chip in Low position; the second number is with Flip Chip in High position