


## 765 Optimum Plus Wheels diameter: 686 mm / 27 inch

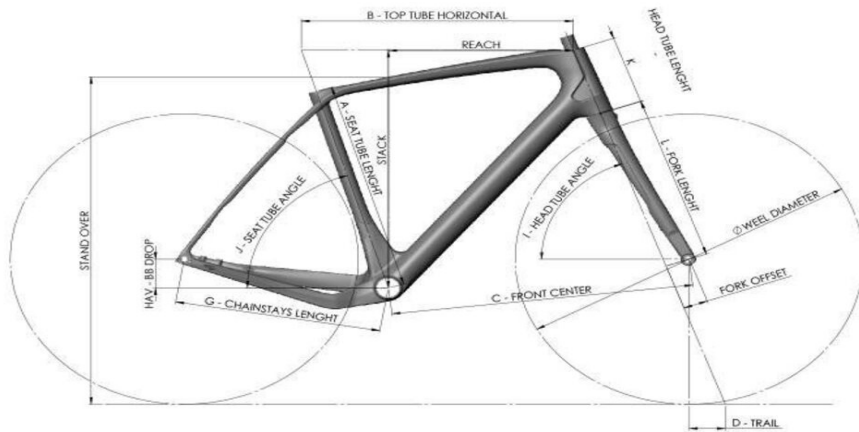

### Geometry Chart (MM)

	<b>XS</b>	<b>S</b>	<b>M</b>	<b>L</b>	<b>XL</b>	
<b>Stack</b>	530	554	578	602	626	
<b>Reach</b>	355	365	375	385	395	
<b>I - Head tube (°)</b>	70.3	70.3	70.3	70.3	70	.3
<b>J - Seat tube (°)</b>	74	74	73	73	73	
<b>A - Seat tube</b>	470	490	510	535	560	
<b>B - Top Tube horizontal</b>	507	524	552	569	586.5	
<b>C - Front Center</b>	577	595.5	614	632.5	651	
<b>D - Trail</b>	70.5	70.5	70.5	70.5	70.5	
<b>F - Fork offset</b>	50	50	50	50	50	
<b>G - Chainstays</b>	420	420	420	420	420	
<b>K - Head tube</b>	111.5	137	162.5	188	213.5	
<b>L - Fork</b>	395	395	395	395	395	
<b>HAV</b>	70	70	70	70	70	
<b>Standover</b>	740	764	788	812	836	

### Geometry Chart (INCHES)

	<b>XS</b>	<b>S</b>	<b>M</b>	<b>L</b>	<b>XL</b>	
<b>Stack</b>	20.9	21.8	22.8	23.7	24.6	
<b>Reach</b>	14	14.4	14.8	15.2	15.6	
<b>I - Head tube (°)</b>	70.3	70.3	70.3	70.3	70	.3
<b>J - Seat tube (°)</b>	74	74	73	73	73	
<b>A - Seat tube</b>	18.5	19.3	20.1	21.1	22	
<b>B - Top Tube horizontal</b>	20	20.6	21.7	22.4	23.1	
<b>C - Front Center</b>	22.7	23.4	24.2	24.9	25.6	
<b>D - Trail</b>	2.8	2.8	2.8	2.8	2.8	
<b>F - Fork offset</b>	2	2	2	2	2	
<b>G - Chainstays</b>	16.5	16.5	16.5	16.5	16.5	
<b>K - Head tube</b>	4.4	5.4	6.4	7.4	8.4	
<b>L - Fork</b>	15.6	15.6	15.6	15.6	15.6	
<b>HAV</b>	2.8	2.8	2.8	2.8	2.8	

