


765 Optimum Geometry

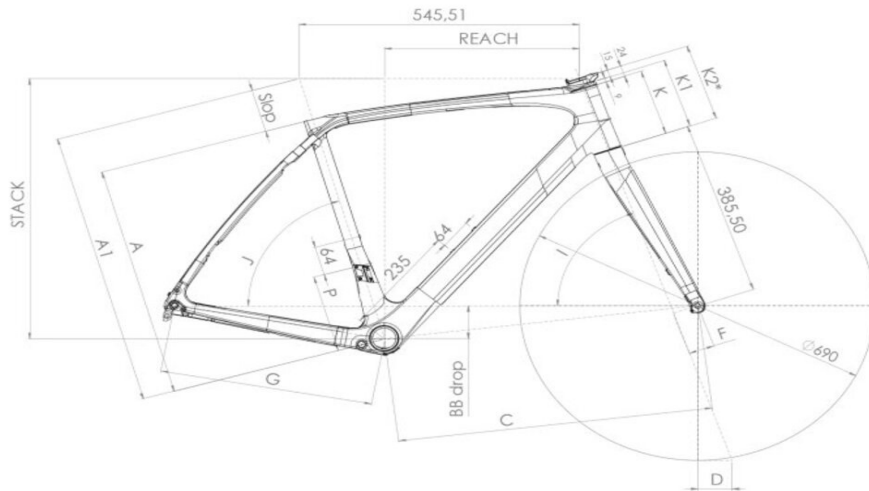

Geometry Chart (MM)

	XS	S	M	L	XL
Stack	534	558	582	606	630
Reach	359	369	379	389	399
I - Head tube (°)	70.8	70.8	70.8	70.8	70.8
J - Seat tube (°)	74	74	74	74	74
A - Seat tube	470	490	510	535	560
B - Top Tube horizontal	511.8	528.7	545.5	562.4	579.3
C - Front Center	576	594	613	630	650
D - Trail	67	67	67	67	67
F - Déport de fourche	50	50	50	50	50
G - Chainstays	415	415	415	415	415
K2 - Head tube	117	142	170	196	224
L - Fork	385.5	385.5	385.5	385.5	385.5
HAV	76	76	73.5	73.5	71
Standover	742	766	790	814	838

Geometry Chart (INCHES)

	XS	S	M	L	XL
Stack	21	22	22.9	23.9	24.8
Reach	14.1	14.5	14.9	15.3	15.7
I - Head tube (°)	70.8	70.8	70.8	70.8	70.8
J - Seat tube (°)	74	74	74	74	74
A - Seat tube	18.5	19.3	20.1	21.1	22
B - Top Tube horizontal	20.1	20.8	21.5	22.1	22.8
C - Front Center	22.7	23.4	24.1	24.8	25.6
D - Trail	2.6	2.6	2.6	2.6	2.6
F - Déport de fourche	2	2	2	2	2
G - Chainstays	16.3	16.3	16.3	16.3	16.3
K2 - Head tube	4.6	5.6	6.7	7.7	8.8
L - Fork	15.2	15.2	15.2	15.2	15.2
HAV	3	3	2.9	2.9	2.8

