


785 Huez Wheels diameter : 686 mm / 27 inch

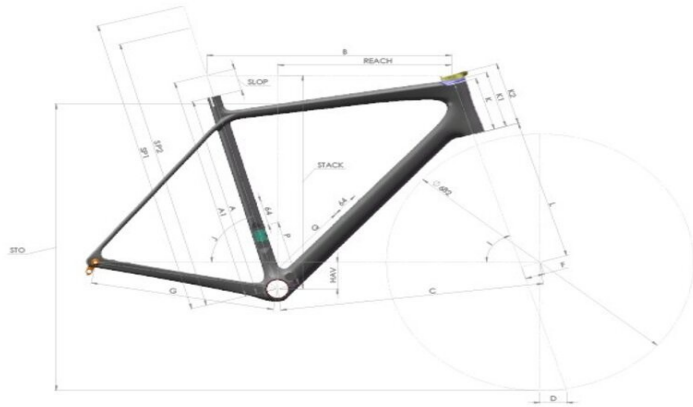

Geometry Chart (MM)

| | XS | S | M | L | XL |
|--------------------------|-------|-------|-------|-------|-------|
| Stack | 519.2 | 543.3 | 567.3 | 591.3 | 615.3 |
| Reach | 365.3 | 375.3 | 385.6 | 395.5 | 405.6 |
| I - Head tube (°) | 71.5 | 71.5 | 73 | 73 | 73 |
| J - Seat tube (°) | 74.5 | 74.5 | 74.5 | 74.5 | 74.5 |
| A - Seat tube | 480 | 504 | 530 | 554 | 579 |
| B - Top tube | 509.3 | 526 | 543 | 559.6 | 576.3 |
| C - Front Center | 569.8 | 587.6 | 586.7 | 603.9 | 621.7 |
| D - Trail | 59.8 | 59.8 | 59.3 | 59.3 | 59.3 |
| F - Fork offset | 50 | 50 | 43 | 43 | 43 |
| G - Chainstays | 410 | 410 | 410 | 410 | 410 |
| K - Head tube | 94.4 | 119.6 | 140.7 | 165.8 | 193.5 |
| L - Fork | 368 | 368 | 368 | 368 | 368 |
| HAV | 73 | 73 | 70.5 | 70.5 | 68 |
| Standover | 709.9 | 733.7 | 761.7 | 785.5 | 812.5 |

Geometry Chart (INCHES)

| | XS | S | M | L | XL |
|--------------------------|------|------|------|------|------|
| Stack | 20.4 | 21.4 | 22.3 | 23.3 | 24.2 |
| Reach | 14.4 | 14.8 | 15.2 | 15.6 | 16 |
| I - Head tube (°) | 71.5 | 71.5 | 73 | 73 | 73 |
| J - Seat tube (°) | 74.5 | 74.5 | 74.5 | 74.5 | 74.5 |
| A - Seat tube | 18.9 | 19.8 | 20.9 | 21.8 | 22.8 |
| B - Top tube | 20.1 | 20.7 | 21.4 | 22 | 22.7 |
| C - Front Center | 22.4 | 23.1 | 23.1 | 23.8 | 24.5 |
| D - Trail | 2.4 | 2.4 | 2.3 | 2.3 | 2.3 |
| F - Fork offset | 2 | 2 | 1.7 | 1.7 | 1.7 |
| G - Chainstays | 16.1 | 16.1 | 16.1 | 16.1 | 16.1 |
| K - Head tube | 3.7 | 4.7 | 5.5 | 6.5 | 7.6 |
| L - Fork | 14.5 | 14.5 | 14.5 | 14.5 | 14.5 |
| HAV | 2.9 | 2.9 | 2.8 | 2.8 | 2.7 |

| |
|------------------|
| Standover |
|------------------|

| |
|------|
| 27.9 |
|------|

| |
|------|
| 28.9 |
|------|

| |
|----|
| 30 |
|----|

| |
|------|
| 30.9 |
|------|

| |
|----|
| 32 |
|----|