


## Geometry Chart

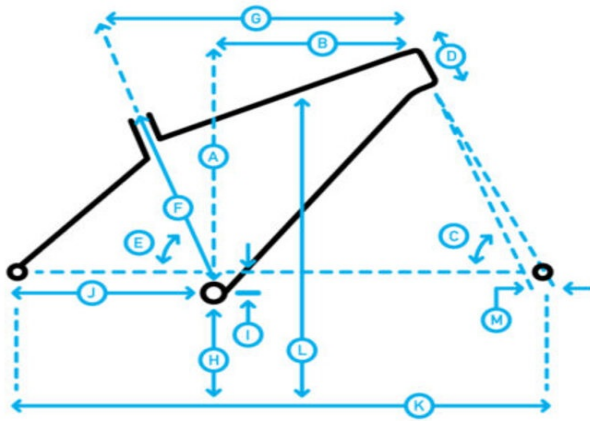

	<b>XS</b>	<b>S</b>	<b>M (27.5)</b>	<b>M (29)</b>	<b>L</b>	<b>XL</b>
A Stack	580.8	585.5	590	616	620.5	625
B Reach	400	415	430	430	445	465
C Headtube Angle	68.5°	68.5°	68.5°	68°	68°	68°
D Headtube Length	100	105	110	110	115	120
E Seattube Angle	74°	74°	74°	74°	74°	74°
F Seattube Length	330	381	431	431	481	520
G Toptube Effective	566.5	583	599.2	606.6	623	644.2
H BB Height	307	307	307	311.5	311.5	311.5
I BB Drop	48	48	48	61	61	61
J Chainstay	430	430	430	455	455	455
K Wheelbase	1084.5	1101.3	1118.2	1160	1177	1199
L Standover Height	649.11	663.03	706.24	716.44	744.89	773.66
M Fork Offset	44	44	44	51	51	51
Seatpost Diameter	27.2	27.2	27.2	27.2	27.2	27.2
Handlebar Width	780	780	780	780	780	780
Stem Length	45	45	45	45	45	45
Crank Length	170	170	170	170	170	170

Note: All lengths in millimeters