


## Geometry Chart

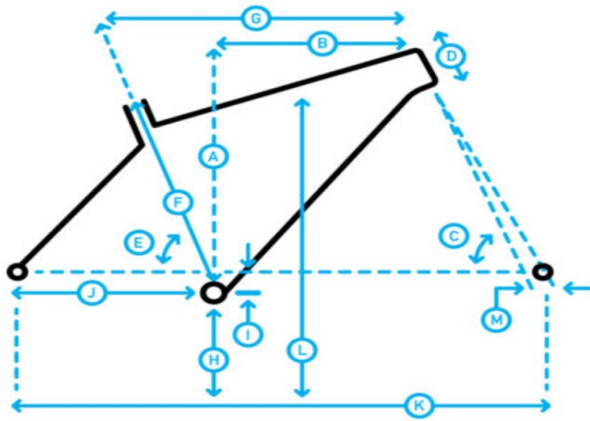

	<b>50</b>	<b>52</b>	<b>54</b>	<b>56</b>	<b>58</b>	<b>60</b>
A Stack	552	568	582	601	620	641
B Reach	367	372	377	387	402	404
C Headtube Angle	71°	71.5°	71.5°	71.5°	71.5°	71.5°
D Headtube Length	120	135	150	170	190	210
E Seattube Angle	74.5°	74°	73.5°	73.5°	73.5°	73°
F Seattube Length	460	480	500	520	540	560
G Toptube Effective	520	535	550	565	585	600
H BB Height	276	276	276	276	276	276
I BB Drop	78	78	78	78	78	78
J Chainstay	432	432	432	432	432	432
K Wheelbase	1008	1014	1024	1040	1060	1070
L Standover Height	714	732	755	775	794	814
M Fork Offset	50	50	50	50	50	50
Seatpost Diameter	27.2	27.2	27.2	27.2	27.2	27.2
Handlebar Width	420	420	440	440	460	460
Stem Length	70	70	90	90	110	110
Crank Length	170	170	175	175	175	175

Note: All lengths in millimeters