


## Geometry Chart

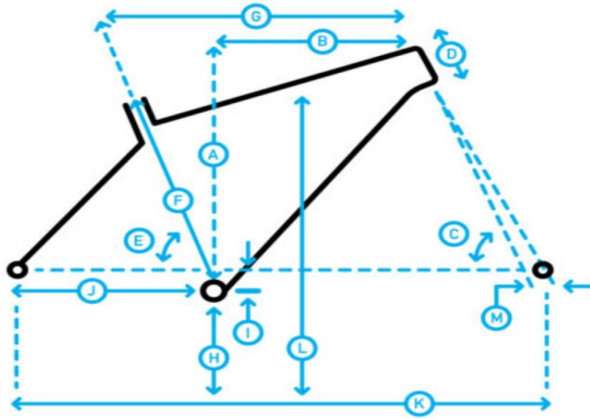

	<b>47</b>	<b>50</b>	<b>52</b>	<b>54</b>	<b>56</b>	<b>58</b>	<b>60</b>
A STACK	534.57	541.26	555.4	574.52	590.64	609.72	619.25
B REACH	349.75	359.8	360.48	378.42	384.42	398.59	404.75
C HEADTUBE ANGLE	70°	70.5°	70.5°	72°	72.5°	72.5°	72.5°
D HEADTUBE LENGTH	125	130	145	155	170	190	200
E SEATTUBE ANGLE (ACTUAL)	74.5°	74°	73.5°	73.5°	73°	73°	72.5°
F SEATTUBE LENGTH	440	470	490	510	530	550	570
G TOPTUBE (EFFECTIVE)	498	515	525	545	565	585	600
H BOTTOM BRACKET HEIGHT	269	269	269	269	269	269	269
I BOTTOM BRACKET DROP	72	72	72	72	72	72	72
J CHAINSTAY	420	420	420	420	420	420	420
K Wheelbase	992.55	1000.22	993.92	999.2	1008.92	1029.1	1038.26
L STANDOVER HEIGHT	697.12	721.09	741.53	758.79	777.05	796.2	812.46
M FORK OFFSET	57	57	57	45	45	45	45
SEATPOST DIAMETER	27.2	27.2	27.2	27.2	27.2	27.2	27.2
HANDLEBAR WIDTH	400	400	400	420	420	440	440
STEM LENGTH	75	75	75	90	90	90	90
CRANK LENGTH	170	170	170	175	175	175	175

Note: All lengths in millimeters