


Geometry Chart

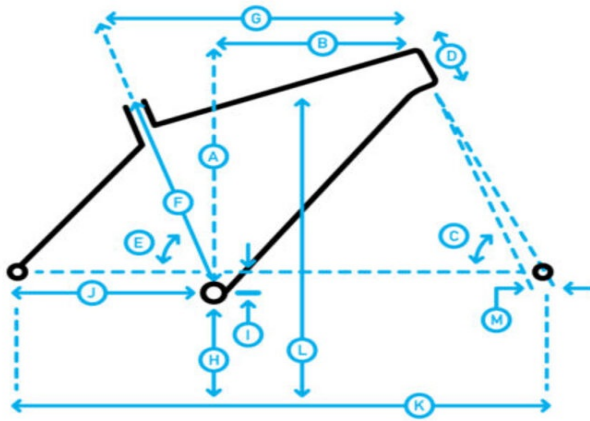

| | XS | S | M | L | XL |
|---------------------|-----------|----------|----------|----------|-----------|
| A Stack | 557 | 571.3 | 590 | 609 | 637.3 |
| B Reach | 385 | 400 | 420 | 440 | 455 |
| C Headtube Angle | 70.5° | 70.5° | 70.5° | 70.5° | 70.5° |
| D Headtube Length | 140 | 155 | 175 | 195 | 225 |
| E Seattube Angle | 73.5° | 73.5° | 73.5° | 73° | 73° |
| F Seattube Length | 380 | 430 | 480 | 520 | 550 |
| G Toptube Effective | 550 | 569.2 | 594.8 | 620.4 | 643.8 |
| H BB Height | 283.5 | 283.5 | 283.5 | 283.5 | 283.5 |
| I BB Drop | 70 | 70 | 70 | 70 | 70 |
| J Chainstay | 445 | 445 | 445 | 445 | 445 |
| K Wheelbase | 1050 | 1070 | 1096.7 | 1123.4 | 1148.4 |
| L Standover Height | 660.74 | 705.38 | 745.2 | 780.34 | 809.68 |
| M Fork Offset | 50 | 50 | 50 | 50 | 50 |
| Seatpost Diameter | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 |
| Handlebar Width | 640 | 640 | 640 | 640 | 640 |
| Stem Length | 70 | 70 | 70 | 70 | 70 |
| Crank Length | 170 | 170 | 175 | 175 | 175 |

Note: All lengths in millimeters