


## Geometry Chart

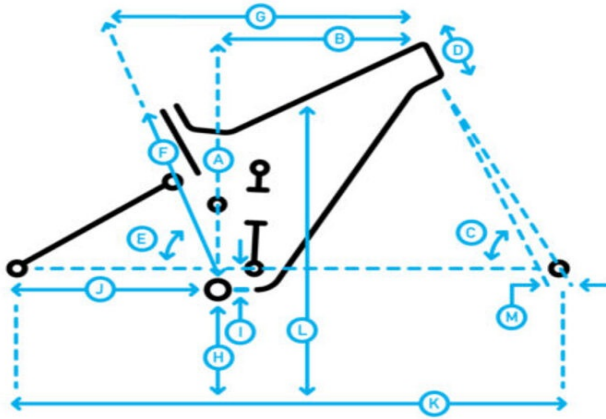

	<b>XS</b>	<b>S</b>	<b>M (27.5)</b>	<b>M (29)</b>	<b>L</b>	<b>XL</b>
A Stack	569.1	600.7	605.2	637.3	637.3	641.8
B Reach	415	430	450	460	485	515
C Headtube Angle	65.5°	65.5°	65.5°	65.5°	65.5°	65.5°
D Headtube Length	115	120	125	115	125	130
E Seattube Angle	77°	77°	77°	77°	77°	77°
F Seattube Length	330	390	400	400	425	430
G Toptube Effective	552.6	568.7	589.7	605	632.1	663.2
H BB Height	339	339	339	343	343	343
I BB Drop	35	35	35	35	35	35
J Chainstay	430	430	430	430	430	430
K Wheelbase	1147.8	1164.8	1186.9	1205.1	1234.4	1266.3
L Standover Height	661.7	677.8	687.8	691.2	701.7	700.5
M Fork Offset	44	44	44	44	44	44
Seatpost Diameter	30.9	30.9	30.9	30.9	30.9	30.9
Handlebar Width	780	780	780	780	780	780
Stem Length	35	35	35	35	35	35
Crank Length	170	170	170	170	170	170

Note: All lengths in millimeters