


Geometry Chart

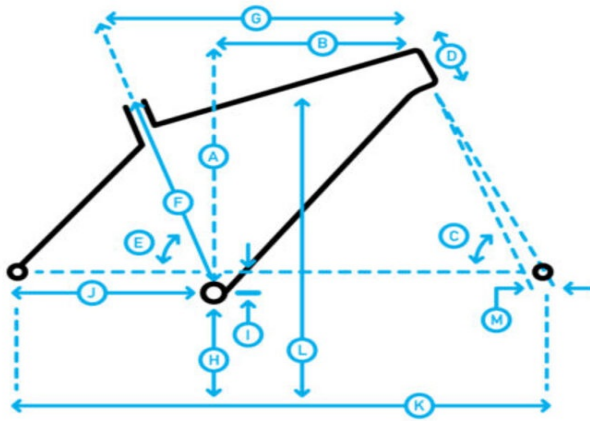

| | S | M | L | XL |
|---------------------|----------|----------|----------|-----------|
| A Stack | 618 | 622.5 | 631.5 | 636 |
| B Reach | 422 | 450 | 470 | 500 |
| C Headtube Angle | 64° | 64° | 64° | 64° |
| D Headtube Length | 110 | 115 | 125 | 130 |
| E Seattube Angle | 77° | 77° | 77° | 77° |
| F Seattube Length | 310 | 340 | 375 | 414 |
| G Toptube Effective | 564.7 | 593.7 | 615.8 | 646.8 |
| H BB Height | 316 | 316 | 316 | 316 |
| I BB Drop | 50 | 50 | 50 | 50 |
| J Chainstay | 425 | 425 | 425 | 425 |
| K Wheelbase | 1173.4 | 1203.6 | 1228 | 1260.2 |
| L Standover Height | 627.7 | 656.4 | 664.8 | 681 |
| M Fork Offset | 47 | 47 | 47 | 47 |
| Seatpost Diameter | 30.9 | 30.9 | 30.9 | 30.9 |
| Handlebar Width | 780 | 780 | 780 | 780 |
| Stem Length | 35 | 35 | 35 | 35 |
| Crank Length | 170 | 170 | 170 | 170 |

Note: All lengths in millimeters