


# Geometry - 2025 Felt AR FRD Ultimate Ultegra Di2

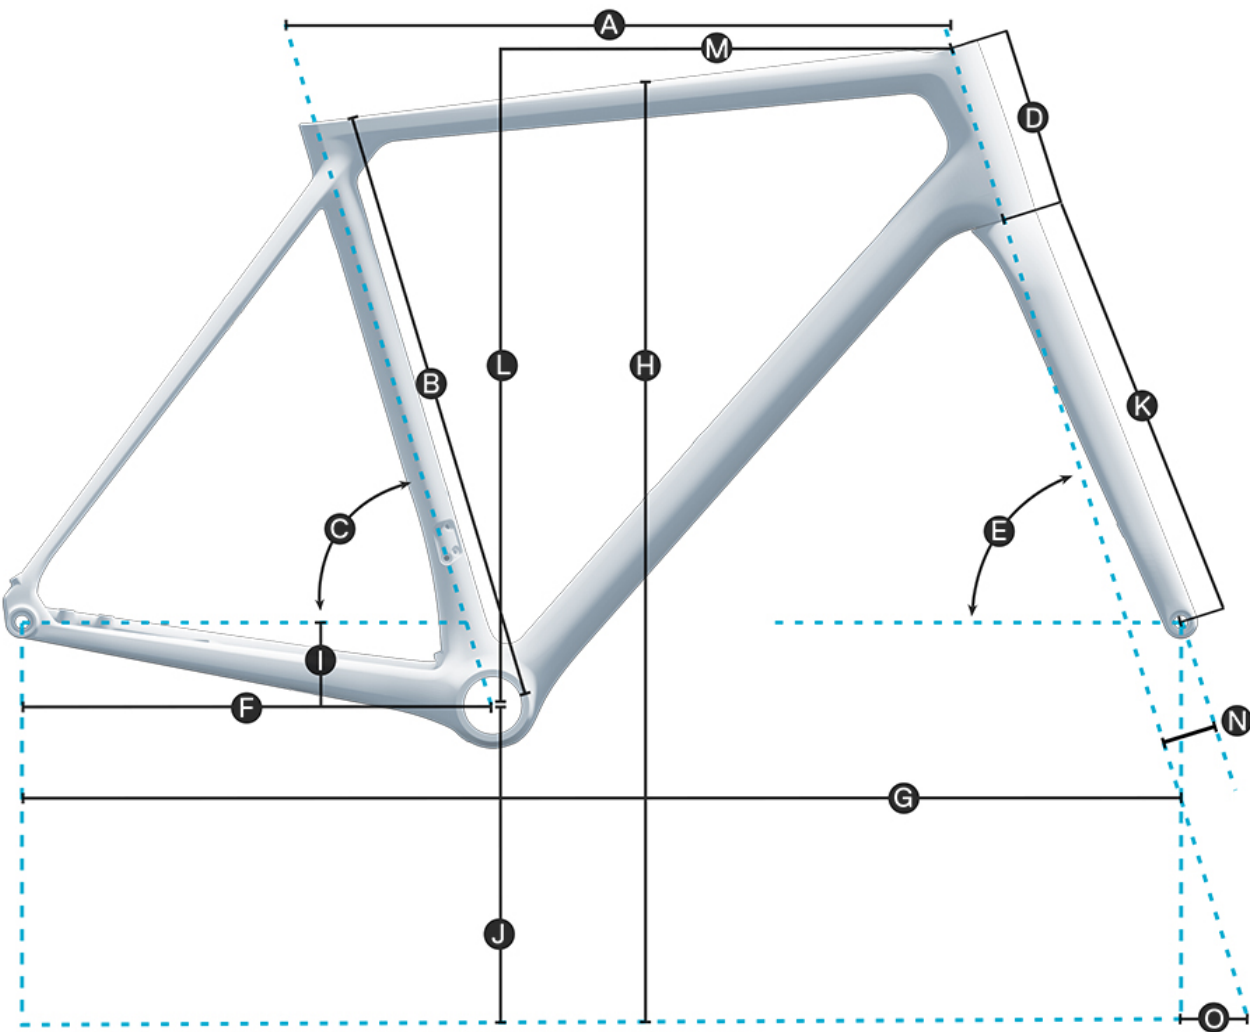

|                       | 48     | 51     | 54       | 56     | 58      | 61       |
|-----------------------|--------|--------|----------|--------|---------|----------|
| (A) Top Tube Length   | 509 mm | 529 mm | 543 mm   | 560 mm | 580 mm  | 605 mm   |
| (B) Seat Tube Length  | 441 mm | 473 mm | 502.5 mm | 526 mm | 553 mm  | 601 mm   |
| (C) Seat Tube Angle   | 74.3 ° | 74.4 ° | 73.5 °   | 73.5 ° | 73.5 °  | 73 °     |
| (D) Head Tube Length  | 97 mm  | 111 mm | 130 mm   | 150 mm | 167 mm  | 197.5 mm |
| (E) Steering Angle    | 71 °   | 72.1 ° | 73 °     | 73.5 ° | 73.5 °  | 73 °     |
| (F) Chain Stay Length | 408 mm | 408 mm | 410 mm   | 410 mm | 410 mm  | 412 mm   |
| (G) Wheel Base        | 974 mm | 977 mm | 980 mm   | 988 mm | 1003 mm | 1024 mm  |
| (H) Standover Height  | 705 mm | 734 mm | 760 mm   | 780 mm | 807 mm  | 845 mm   |
| (I) BB-Drop           | 72 mm  | 70 mm  | 70 mm    | 70 mm  | 70 mm   | 70 mm    |
| (K) Fork Offset       | 52 mm  | 47 mm  | 47 mm    | 43 mm  | 43 mm   | 43 mm    |
| (L) Stack             | 501 mm | 518 mm | 539 mm   | 561 mm | 579 mm  | 608 mm   |

|                  |        |        |          |          |        |        |
|------------------|--------|--------|----------|----------|--------|--------|
|                  | 48     | 51     | 54       | 56       | 58     | 61     |
| (M) Reach        | 370 mm | 381 mm | 383 mm   | 394 mm   | 408 mm | 419 mm |
| (N) Stem Length  | 90 mm  | 90 mm  | 100 mm   | 100 mm   | 110 mm | 120 mm |
| (O) Crank Length | 165 mm | 170 mm | 172.5 mm | 172.5 mm | 175 mm | 175 mm |