


# Geometry - 2025 Felt B Performance Ultegra

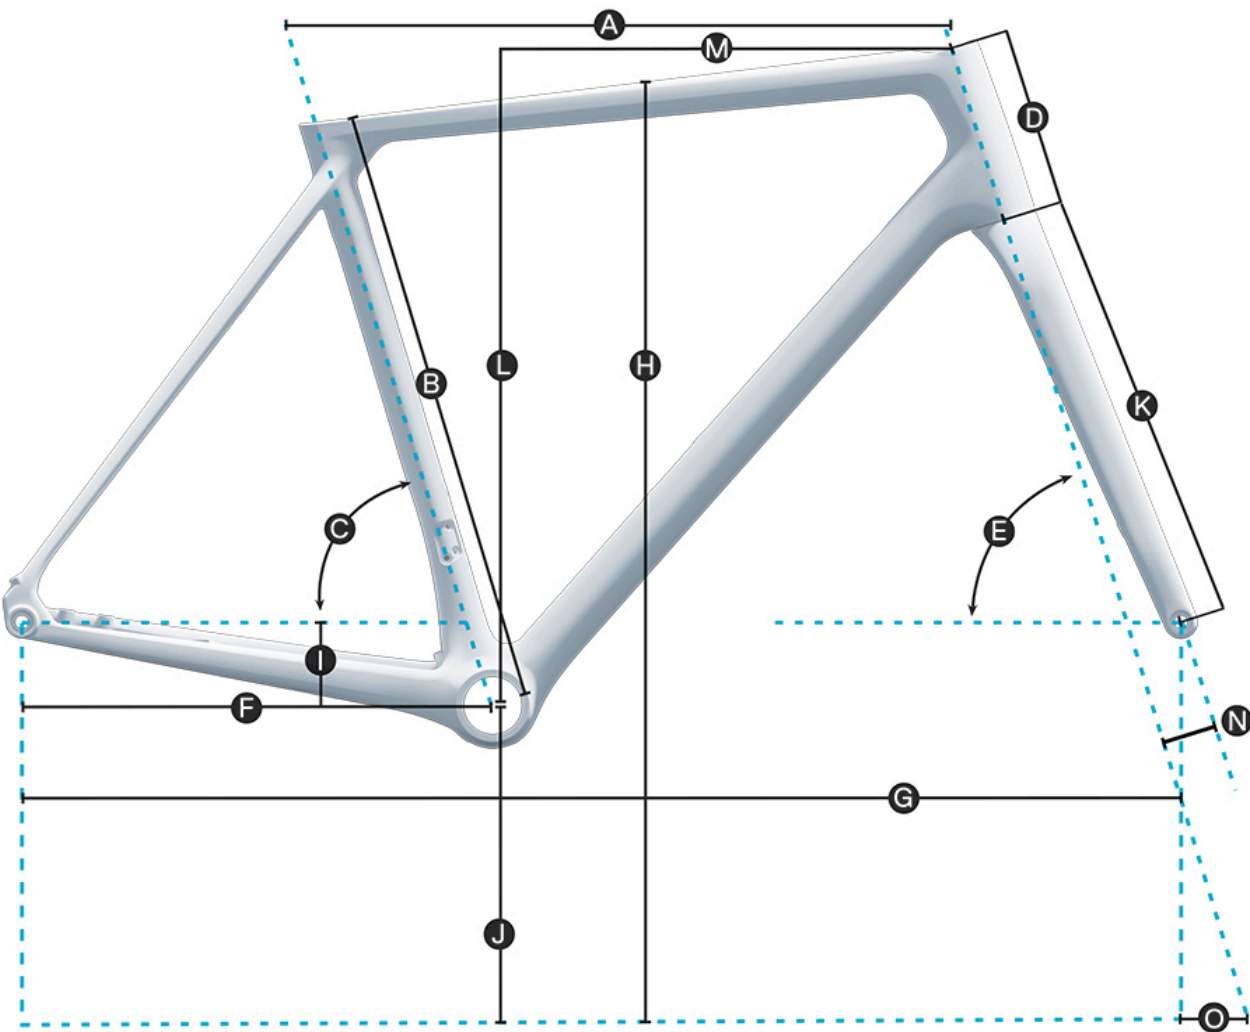

|                       | 47     | 51     | 54     | 56     | 58      | 61      |
|-----------------------|--------|--------|--------|--------|---------|---------|
| (A) Top Tube Length   | 490 mm | 518 mm | 539 mm | 559 mm | 579 mm  | 594 mm  |
| (B) Seat Tube Length  | 470 mm | 510 mm | 540 mm | 560 mm | 580 mm  | 610 mm  |
| (C) Seat Tube Angle   | 76.5 ° | 76 °   | 76 °   | 76 °   | 76 °    | 76 °    |
| (D) Head Tube Length  | 115 mm | 115 mm | 127 mm | 147 mm | 167 mm  | 198 mm  |
| (E) Steering Angle    | 71 °   | 72.5 ° | 73 °   | 73 °   | 73 °    | 73 °    |
| (F) Chain Stay Length | 375 mm | 395 mm | 395 mm | 395 mm | 395 mm  | 395 mm  |
| (G) Wheel Base        | 935 mm | 961 mm | 978 mm | 999 mm | 1020 mm | 1037 mm |
| (H) Standover Height  | 703 mm | 743 mm | 764 mm | 779 mm | 780 mm  | 780 mm  |
| (I) BB-Drop           | 45 mm  | 70 mm  | 70 mm  | 70 mm  | 70 mm   | 70 mm   |
| (K) Fork Offset       | 40 mm  | 40 mm  | 40 mm  | 40 mm  | 40 mm   | 40 mm   |
| (L) Stack             | 468 mm | 521 mm | 535 mm | 554 mm | 573 mm  | 602 mm  |

|                  |        |        |        |        |          |          |
|------------------|--------|--------|--------|--------|----------|----------|
|                  | 47     | 51     | 54     | 56     | 58       | 61       |
| (M) Reach        | 375 mm | 388 mm | 405 mm | 420 mm | 436 mm   | 444 mm   |
| (N) Stem Length  | 60 mm  | 80 mm  | 90 mm  | 90 mm  | 100 mm   | 110 mm   |
| (O) Crank Length | 165 mm | 165 mm | 170 mm | 170 mm | 172.5 mm | 172.5 mm |