


Geometry - 2025 Felt FR FRD Dura-Ace Di2

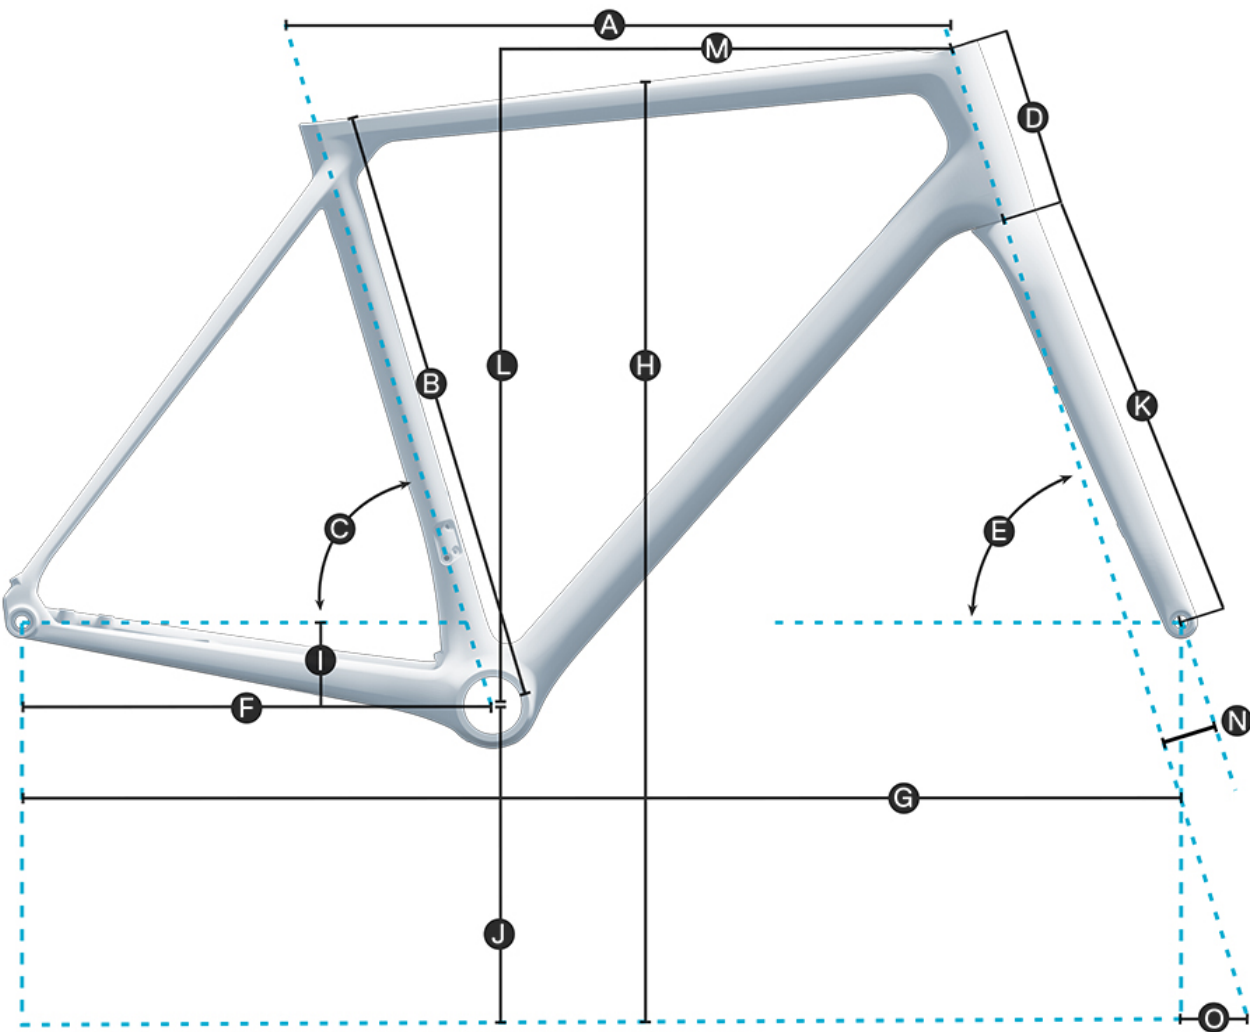

	45	48	51	54	56	58	61
(A) Top Tube Length	494.8 mm	512 mm	526.2 mm	546.6 mm	558.1 mm	581.4 mm	600.3 mm
(B) Seat Tube Length	405 mm	426 mm	467 mm	507 mm	527 mm	558 mm	594.6 mm
(C) Seat Tube Angle	75.3 °	74.5 °	74 °	73.5 °	73.5 °	73.3 °	73 °
(D) Head Tube Length	90 mm	100 mm	115 mm	135 mm	155 mm	177 mm	205 mm
(E) Steering Angle	70.5 °	71.5 °	72.4 °	72.6 °	73.2 °	73.8 °	73.8 °
(F) Chain Stay Length	406 mm	406 mm	406 mm	408 mm	408 mm	410 mm	410 mm
(G) Wheel Base	967.4 mm	969.4 mm	971.4 mm	982.1 mm	988.2 mm	1005.3 mm	1020.4 mm
(H) Standover Height	704 mm	720.6 mm	750 mm	782 mm	802 mm	827.9 mm	860.8 mm
(I) BB-Drop	74 mm	74 mm	74 mm	72 mm	72 mm	72 mm	72 mm
(J) BB Height	266.3 mm	266.3 mm	266.3 mm	268.3 mm	268.3 mm	268.3 mm	268.3 mm
(K) Fork Offset	51 mm	51 mm	51 mm	45 mm	45 mm	45 mm	45 mm

	45	48	51	54	56	58	61
(L) Stack	496.2 mm	509.2 mm	526.6 mm	546.2 mm	567.3 mm	590.5 mm	617.4 mm
(M) Reach	364.6 mm	370.8 mm	375.2 mm	384.8 mm	390 mm	404.2 mm	411.5 mm
(N) Stem Length	100 mm	100 mm	100 mm	100 mm	100 mm	110 mm	120 mm
(O) Crank Length	167.5 mm	167.5 mm	170 mm	172.5 mm	172.5 mm	175 mm	175 mm