


Geometry - 2025 Felt IA 2.0 PRO Ultegra Di2

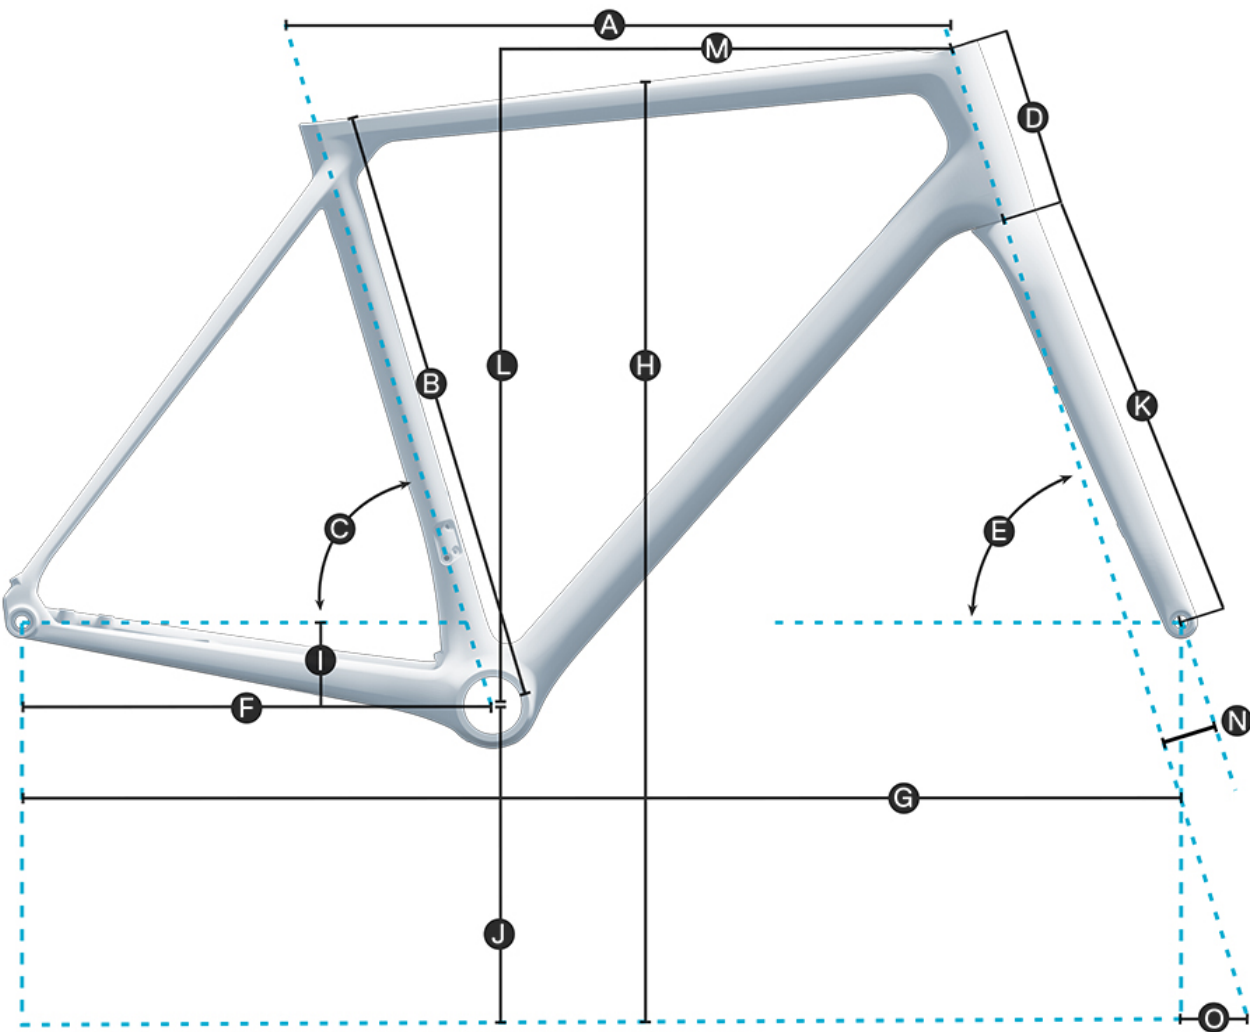

|                       | 48      | 51     | 54      | 56      | 58      |
|-----------------------|---------|--------|---------|---------|---------|
| (A) Top Tube Length   | 468 mm  | 486 mm | 510 mm  | 541 mm  | 573 mm  |
| (B) Seat Tube Length  | 496 mm  | 525 mm | 546 mm  | 571 mm  | 598 mm  |
| (C) Seat Tube Angle   | 79.5 °  | 79 °   | 78.5 °  | 78 °    | 77.5 °  |
| (D) Head Tube Length  | 67.5 mm | 96 mm  | 111 mm  | 136 mm  | 163 mm  |
| (E) Steering Angle    | 71.5 °  | 71.5 ° | 72 °    | 72 °    | 72 °    |
| (F) Chain Stay Length | 405 mm  | 405 mm | 405 mm  | 405 mm  | 405 mm  |
| (G) Wheel Base        | 970 mm  | 987 mm | 1000 mm | 1029 mm | 1058 mm |
| (H) Standover Height  | 735 mm  | 749 mm | 765 mm  | 779 mm  | 793 mm  |
| (I) BB-Drop           | 72 mm   | 72 mm  | 72 mm   | 72 mm   | 72 mm   |
| (K) Fork Offset       | 50 mm   | 50 mm  | 45 mm   | 45 mm   | 45 mm   |
| (L) Stack             | 478 mm  | 505 mm | 522 mm  | 546 mm  | 572 mm  |

|                  |        |        |        |        |          |
|------------------|--------|--------|--------|--------|----------|
|                  | 48     | 51     | 54     | 56     | 58       |
| (M) Reach        | 379 mm | 387 mm | 404 mm | 425 mm | 445 mm   |
| (O) Crank Length | 165 mm | 165 mm | 170 mm | 170 mm | 172.5 mm |