
Geometrical Chart - 2025 Intense Primer 275 Expert



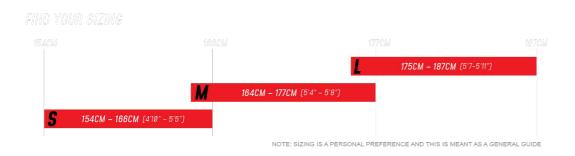

BASED OFF HIGH SETTING

HIGH SETTING	SM	MD	LG
SEATTUBE LENGTH	395mm	418mm	444.3mm
EFFECTIVE TOPTUBE	567mm	595mm	624mm
STACK	573mm	587mm	599mm
REACH	410mm	434mm	457mm
BB HEIGHT	347mm	347mm	347mm
BB DROP	7mm	7mm	7mm
HEADTUBE LENGTH	90mm	105mm	115mm
HEADTUBE ANGLE	65°	65°	65°
SEATUBE ANGLE (EFFECTIVE)	74.7°	74.7°	74.7"°
STANDOVER HEIGHT	793mm	793mm	793mm
CHAINSTAY LENGTH	432mm	432mm	432mm
WHEELBASE	1155mm	1185mm	1214mm

LOW SETTING	SM	MD	LG
SEATTUBE LENGTH	395mm	418mm	444.3mm
EFFECTIVE TOPTUBE	568.6mm	597mm	625mm
STACK	578mm	592mm	601mm
REACH	404mm	428mm	453mm
BB HEIGHT	340mm	340mm	340mm
BB DROP	14mm	14mm	14mm
HEADTUBE LENGTH	90mm	105mm	115mm
HEADTUBE ANGLE	64.4°	64.4°	64.4°
SEATTUBE ANGLE (EFFECTIVE)	74°	74°	74°
STANDOVER HEIGHT	778mm	786mm	790mm
CHAINSTAY LENGTH	434mm	434mm	434mm
WHEELBASE	1156.3mm	1186mm	1215mm

NOTE: GEOMETRY TAKEN AT TOP OUT WITH 529.1MM AXLE TO CROWN LENGTH AND 44MM FORK OFFSET.