



SCOTT

BIKE

EN ISO 4210-2
SCOTT OWNER'S MANUAL
ROAD BIKE

WWW.SCOTT-SPORTS.COM



⚠ WARNING

- Read at least pages 11-22 before your first ride!
Perform the functional check on pages 23-25 before every ride!
- Observe the chapter “Intended use of your SCOTT bike”.
- For the SCOTT service plan and the SCOTT handover report read the Quick Start Manual.

SAFETY INSTRUCTIONS

Your bike and this owner’s manual comply with the requirements of the EN ISO standard 4210-2 Cycles – Safety requirements for bicycles.



WWW.SCOTT-SPORTS.COM

Read this owner's manual and the manuals of the component manufacturers. Together with the manuals of the component manufacturers this SCOTT owner's manual is part of a system. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

If this SCOTT owner's manual will not deliver the responses to all questions and before changing any settings, ask your SCOTT dealer.

SAFETY INSTRUCTIONS

The present owner's manual is subject to European law and the EN/ISO standards. If delivered to countries outside Europe, supplementary information has to be provided by the importer of the SCOTT bike, if necessary.

Inform yourself on www.scott-sports.com

Imprint:

V9.1, June 2022

Technical details in the text and illustrations of this manual are subject to change.

© No part of this publication may be reprinted, translated, copied or transmitted in any form or by any means, electronic, mechanical, by hand or otherwise for another business purpose without prior written permission of Zedler – Institut für Fahrradtechnik und -Sicherheit GmbH.

© Text, concept, photos and graphic design
Zedler – Institut für Fahrradtechnik und -Sicherheit GmbH www.zedler.de and
SCOTT SPORTS SA www.scott-sports.com

SCOTT ROAD BIKE



SCOTT TIME TRIAL MACHINE



SCOTT CYCLO-CROSS BIKE



Frame:

- ① Top tube
- ② Down tube
- ③ Seat tube
- ④ Chainstay
- ⑤ Rear stay
- ⑥ Head tube

- 1 Saddle
- 2 Seat post
- 3 Seat post clamp
- 4 Brake rear
- 5 Rotor
- 6 Front derailleur
- 7 Cassette sprockets
- 8 Rear derailleur
- 9 Chain
- 10 Chainring
- 11 Crank
- 12 Pedal
- 13 Stem
- 14 Handlebar
- 15 Armrests
- 16 Extensions

- 17 Bull-horn handlebars
- 18 Brake lever
- 19 Shifter
- 20 Brake lever/shifter
- 21 Headset
- 22 Brake front
- 23 Rotor
- 24 Fork

Wheel:

- 25 Quick-release/
thru axle
- 26 Spoke
- 27 Rim
- 28 Tyre
- 29 Hub

TABLE OF CONTENTS

SOME NOTES ON THIS SCOTT OWNER'S MANUAL09
SAFETY AND BEHAVIOUR	11
INTENDED USE OF YOUR SCOTT BIKE	14
Notes on the maximum permissible overall weight	18
TESTS BEFORE YOUR FIRST RIDE20
TESTS BEFORE EVERY RIDE23
USING QUICK-RELEASES AND THRU AXLES25
Quick-releases on the SCOTT bike25
Safe fastening of a component with a quick-release26
Thru axles on the SCOTT bike28
Safe fastening of components with a quick-release28
ADJUSTING THE SCOTT BIKE TO THE RIDER30
Adjustment of the saddle to the correct height31
Adjustment of the height of the handlebars33
Stems for threadless systems – Aheadset®35
What to bear in mind with SCOTT bikes with carbon steerer36
Saddle adjustment – fore-to-aft position and horizontal tilt38
Adjustment of saddle position and tilt39
Cockpit adjustment42
Brake lever reach adjustment on SCOTT road bikes and SCOTT cyclo-cross bikes42
Adjustment of handlebar tilt and brake lever/shifter units on SCOTT road bikes and SCOTT cyclo-cross bikes44
What to bear in mind with aero bars on SCOTT triathlon bikes and SCOTT time trial machines45
BRAKES46
Rim brakes48
Racing and side-pull brakes48
Disc Brakes51
Hydraulic disc brakes52
Mechanical disc brakes54

GEARS	55
Derailleur gears	55
Operation and control	56
Checking and readjusting	59
Adjusting the rear derailleur	60
Adjusting the front derailleur	62
Shimano Di2	63
Rechargeable battery	64
SRAM ETAP/AXS ROAD	65
BICYCLE CHAIN	66
Chain maintenance	66
WHEELS AND TYRES	67
Notes on tyres, inner tubes, rim tape, inflation pressure	68
Valves	70
Rim trueness and spoke tension	71
Carbon wheels	71
Particularities of braking with carbon wheels	72
REPAIRING TYRE PUNCTURES	73
Removing the wheel	74
Clincher and folding tyres	75
Tyre removal	75
Tyre mounting	76
Tubeless tyres (UST tyres)	78
Tyre removal	78
Puncture assistance - repair	78
Tyre mounting	79
Useful information about tubeless tyres	81
Remounting the wheel	82
TESTS AFTER AN ACCIDENT	84
CARBON - A PARTICULAR MATERIAL	86
THE HEADSET ON THE SCOTT BIKE	89
Checking and readjusting	89
Threadless headset - Aheadset®	90
LIGHTING OF YOUR SCOTT BIKE	91
Battery-operated lighting	92

USEFUL FACTS ABOUT THE SCOTT BIKE92
Helmets and glasses92
Clothing93
Pedals and shoes94
Accessories95
Bicycle locks96
Puncture kit96
Cycle computers96
Aero or triathlon/time trial bars97
Mudguards (wheel protections)97
Transporting luggage98
Taking children with you98
TRANSPORT OF THE SCOTT BIKE99
By car99
By train / By public transport101
By plane101
GENERAL NOTES ON CARE AND SERVICING102
Maintenance and servicing your SCOTT bike102
Cleaning and caring for your SCOTT bike103
Sheltering and storing your SCOTT bike105
SCOTT SERVICE AND MAINTENANCE SCHEDULE106
RECOMMENDED TORQUE SETTINGS FOR YOUR SCOTT BIKE108
Recommended torque settings for disc brakes on your SCOTT bike110
LEGAL REQUIREMENTS FOR RIDING ON PUBLIC ROADS111
WARRANTY AND GUARANTEE112
Notes on wearing parts113
MANUFACTURER'S GUARANTEE114

SOME NOTES ON THIS SCOTT OWNER'S MANUAL

The illustrations on the first pages of the SCOTT owner's manual show a typical SCOTT road bike, a SCOTT time trial machine and a typical SCOTT cyclo-cross bike. One of these SCOTT bikes looks similar to the SCOTT bike you have purchased. Today's bikes come in various types that are designed for specific uses and fitted accordingly. The present SCOTT owner's manual includes the following bicycle types:

- Road bikes **(d)**
- Triathlon bikes
- Time trial machines **(e)**
- Cyclo-cross bikes **(f)**

This SCOTT owner's manual is not applicable to any other than the displayed bicycle types. This manual is not intended to help you assemble a SCOTT bike from individual components, to repair it or to make a partly assembled SCOTT bike ready for use.

In this SCOTT owner's manual the term "road bike" will always be used in general descriptions if it refers to road and triathlon bikes as well as time trial machines and cyclo-cross bikes.



Pay particular attention to the following symbols:

WARNING

This symbol indicates a hazardous situation which could result in death or serious injury – if the relevant operational instructions are not followed or if the relevant protective measures are not taken.

CAUTION

This symbol indicates a hazardous situation which could result in minor or moderate injury – if the relevant operational instructions are not followed or if the relevant protective measures are not taken.

NOTICE

This symbol is used to address practices not related to physical injury – which may, however, result in damage to property and the environment.

SAFETY INSTRUCTIONS

This symbol indicates specific safety-related instructions or procedures about how to handle the product or refers to a section in the operating instructions that deserves your particular attention.

The described possible consequences will not be repeated in the SCOTT owner's manual every time one of the symbols appears.

The present owner's manual complies with the requirements of the EN ISO standard 4210-2 road bikes.

It is essential to also observe the manuals of the component manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

SAFETY AND BEHAVIOUR

Dear SCOTT customer,

Congratulations on your purchase of a new SCOTT bike. We are confident that the bike will exceed your expectations for quality, functioning and riding characteristics. Our SCOTT frames and components are customized and adjusted to suit the needs of the users to enhance your joy when riding on your new SCOTT bike – whether you are a beginner or a non-professional road racer!

To ensure that you ride safely and with joy, we strongly encourage you to take the time to read this SCOTT owner's manual thoroughly.

In purchasing this SCOTT bike you have chosen a product of high quality and technology. Each component of your new SCOTT bike has been designed, manufactured and assembled with great care and expertise. Your SCOTT dealer gave the bike its final assembly and made a functional check. This guarantees you pleasure and a sense of confidence from the very first turn of the pedals **(d+e)**.

This SCOTT owner's manual contains a wealth of useful facts on the proper use of your SCOTT bike, its maintenance and operation as well as interesting information on bike design and engineering. Read this SCOTT owner's manual thoroughly. We are sure that even if you have been cycling for many years you will find it worthwhile. Bike technology has developed at a rapid pace during recent years.

Therefore, before setting off on your new SCOTT bike, you should read at least the chapter "Tests before your first ride". To ensure as much fun and safety as possible during cycling, be sure to carry out the functional check described in the chapter "Tests before every ride" before setting off on your SCOTT bike.

Even a manual as detailed as an encyclopaedia could not describe every possible combination of available bicycle models and components. This SCOTT owner's manual therefore focuses on your newly purchased SCOTT bike and standard components **(f)** and provides useful information and warnings for the handling of your new SCOTT bike.



When doing any adjusting and servicing **(a)**, be aware that the detailed instructions provided in your manual only refer to this SCOTT bike.

The information included here is not applicable to any other bicycle type. As bicycles come in a wide variety of designs with frequent model changes, the routines described may require complementary information. It is essential to also observe the manuals of the component manufacturers.

Be aware that these instructions may require further explanation, depending on the experience and/or skills of the person doing the work. For some jobs you may require additional (special) tools **(b)** or supplementary instructions.

This manual cannot teach you the skills of a bicycle mechanic.

SAFETY INSTRUCTIONS

For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

Before you set off, let us point out a few things to you that are very important to every cyclist: Never ride without a properly adjusted helmet and without glasses **(c)**. Make sure to wear suitable, bright clothing. As a minimum you should wear straight cut trousers or leg bands and shoes fitting the pedal system.

Always ride carefully on public roads and observe the traffic rules so as not to endanger yourself or others.

This manual cannot teach you how to ride. Please be aware that cycling is a potentially dangerous activity that requires the rider to stay in control of his or her SCOTT bike at all times. If necessary, attend a beginners course for cyclists, as offered here and there.

Like any sport, cycling involves the risk of injury and damage. By choosing to ride a bike, you assume the responsibility for the risk. Please note that on a bike you have no protection technique around you like you have in a car (e.g. bodywork, ABS, airbag). Therefore, always ride carefully and respect the other traffic participants.



INTENDED USE OF YOUR SCOTT BIKE

Your SCOTT bike was designed by our engineers for a specific use. Be sure to use your SCOTT bike only according to its intended use, as it may otherwise not withstand the stress and fail causing an accident with unforeseeable consequences! Any improper use will invalidate the warranty.

There is no bicycle type which is suitable for all purposes **(a-c)**. Your SCOTT dealer will be pleased to help you find the right SCOTT bike for you and your needs. He will also show you the limits of the different types of bicycles.

SAFETY INSTRUCTIONS

■ Visit www.scott-sports.com and find out to which condition your new SCOTT bike belongs or contact your SCOTT dealer.

■ You find more information on your SCOTT bike and the weblinks of the component manufacturers via your Quick Start Manual on the respective pages in the manual of the bicycle brand you have purchased.



Cyclo-Cross & Gravel/Adventure bikes (**d+e**) will fall under **Condition 2 SCOTT bicycles**.

SCOTT condition 2 bicycles are for use on normal, paved surfaces, i.e. asphalted or paved roads and cycle lanes, as well as on unpaved roads and gravel paths of moderate grading. Under these conditions there may be contact with uneven terrain and loss of tyre contact with the ground may occur. Steps or kerbs (jumps/drops) may only be ridden carefully up to a maximum height of 15 cm. The intended range of the average speed is between 15 and 25 kmh (9.3 and 15.5 mph).

Before using **SCOTT condition 2 bicycles** on public roads, they must be equipped with the devices prescribed for this purpose (lighting system, bell). Observe the traffic rules when riding on public roads. You find more information in the chapter “Legal Requirements for Riding on Public Roads”.

You find details as to the **maximum permissible overall weight** on the sticker on the frame of your SCOTT bike and in the chapter “Notes on the maximum permissible overall weight”. Under certain circumstances the permissible maximum weight can be further limited by the component manufacturers’ recommendations for use.

⚠ WARNING

- SCOTT condition 2 bicycles are not suitable for offroad use, jumps, slides, stair riding, stoppies (f), wheelies, tricks, etc. Cyclo-Cross & Gravel/Adventure bikes are allowed in Competition.**
- Do not sit or place your full weight on the top tube of your SCOTT bicycle. The frame may sustain damage.**
- Trailers and child seats are only permitted if outlined on your weight card which came with your SCOTT bicycle. Note that SCOTT will not assume liability or provide guarantee for the use of trailers and child seats because of the wide variety of fastening systems for them, the technical specifications for these systems and the problems associated with them.**



⚠ WARNING

Luggage carriers are permitted on SCOTT condition 2 bicycles, if the rear stays and the drop-outs of your SCOTT bike have fastening devices for luggage carriers. In this case mounting a suitable luggage carrier is permitted. Contact your SCOTT dealer before mounting.

Always observe the maximum permissible overall weight of your bicycle when adding a child seat/trailer/luggage carrier and observe the chapter “Notes on the maximum permissible overall weight”.

NOTICE

The use of Turbo/Smart Indoor Trainers is not permitted with SCOTT carbon road bikes. If you wish to use such a device, you do so at your own risk and SCOTT Sports SA accepts no risk or responsibility.

SAFETY INSTRUCTIONS

You find more information in the chapter “Notes on the transport of loads and on carrying children and/or pets with your SCOTT bike”.

You find more information on your SCOTT bike and the weblinks of the component manufacturers via your Quick Start Manual on the respective pages in the manual of the bicycle brand you have purchased.

Condition 6 SCOTT Bikes

SCOTT condition 6 bikes (a-c) are designed for riding exclusively on hard-surface paths and roads with asphalted or paved surface. The tyres must remain in constant contact with the ground. Steps or kerbs may only be ridden carefully up to a maximum height of 15 cm.

They are intended for sports and competition rides under high exertion. The intended range of the average speed is between 30 and 50 kmh (18.6 and 31 mph).

These bikes are not suitable for cross country use, jumps, slides, stair riding, stoppies, wheelies, tricks, etc., not for offroad and cyclo-cross use or for rides with luggage carriers or pannier bags!



Before using **SCOTT condition 6 bikes (d)** on public roads, they must be equipped with the devices prescribed for this purpose (lighting system, bell). Observe the traffic rules when riding on public roads. You find more information in the chapter “Legal requirements for riding on public roads”.

You find details as to the **maximum permissible overall weight** on the sticker on the frame of your SCOTT bike and in the chapter “Notes on the maximum permissible overall weight”. Under certain circumstances the permissible maximum weight can be further limited by the component manufacturers’ recommendations for use.

⚠ WARNING

SCOTT condition 6 bikes are not suitable for cross-country use, jumps (e), slides, stair riding, stoppies (f), wheelies, tricks, etc., not for offroad and cyclo-cross use or for rides with luggage carriers or pannier bags!

Do not sit or place your full weight on the top tube of your SCOTT bike. The frame may sustain damage.

Trailers, child seats and luggage carriers are not permitted on SCOTT condition 6 bikes. Note that SCOTT will not assume liability or provide guarantee for the use of trailers, child seats and luggage carriers.

NOTICE

The use of Turbo/Smart Indoor Trainers is not permitted with SCOTT carbon road bikes. If you wish to use such a device, you do so at your own risk and SCOTT Sports SA accepts no risk or responsibility.

SAFETY INSTRUCTIONS

You find more information on your SCOTT bike and the weblinks of the component manufacturers via your Quick Start Manual on the respective pages in the manual of the bicycle brand you have purchased.



NOTES ON THE MAXIMUM PERMISSIBLE OVERALL WEIGHT

The maximum overall weight limit is calculated as follows:

- Weight bicycle** (kg)
- + Weight cyclist** (kg)
- + Weight luggage** (e.g. backpack, pannier bags)
- = maximum permissible overall weight** (kg)

You find details as to the maximum permissible overall weight on the sticker on the frame of your SCOTT bike **(a)**.

You find details as to the weight of your SCOTT bike / SCOTT pedelec on our website at www.scott-sports.com with your model at “Specifications” **(b)**.



b

APPROX WEIGHTS IN KG	12.70
APPROX WEIGHTS IN LBS	28



⚠ WARNING

Trailers **(c+d)** for children, pets and cargo as well as child seats **(e)** and kids's tandem bikes/trailer systems **(f)** are not permitted on principal on SCOTT Cyclo-Cross & Gravel/Adventure bikes, road bikes, triathlon bikes and time trial machines.



TESTS BEFORE YOUR FIRST RIDE

1. If you want to use your bike on public roads, it has to comply with legal requirements. These requirements may vary in each country. The fittings of your SCOTT bike are, therefore, not necessarily complete **(a)**.

Ask your SCOTT dealer concerning the laws and regulations applicable in your country or in the country you intend to use your SCOTT bike. Have your SCOTT bike equipped accordingly before using it on public roads.

For more information see the chapter “Legal requirements for riding on public roads”.

2. Are you familiar with the brake system **(b)**? Have a look at the handover report in the Quick Start Manual and check whether the brake lever of the front brake is on the side you are used to (right or left). If it is not, ask your SCOTT dealer to switch the brake levers before you set off for the first time.

Your new bike is equipped with modern brakes which may be far more powerful than those you were used to so far. Be sure to first practise using the brakes on a level, non-slip surface off public roads! Slowly approach higher brake performances and speeds.

For more information see the chapter “Brakes” and the manuals of the component manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

3. Are you familiar with the type and functioning of the gears **(c)**? Ask your SCOTT dealer to explain you the gear system and make yourself familiar with your new gears in an area free of traffic, if necessary.

For more information see chapter “Gears” and the manuals of the component manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.



4. Are saddle and handlebars properly adjusted? The saddle should be set to a height from which you can just reach the pedal in its lowest position with your heel **(d)**. The hips should remain horizontal. Check whether your toes reach to the floor when you are sitting on the saddle. Your SCOTT dealer will be pleased to help you, if you are not happy with your seating position.

For more information see the chapter “Adjusting the SCOTT bike to the rider”.

5. If your SCOTT bike is equipped with clipless or step-in pedals **(e)**: Have you ever tried cycling with the respective cycling shoes? First practise locking one shoe onto a pedal and disengaging it while standing on the other leg. Ask your SCOTT dealer to explain you the pedals and to adjust them to your needs.

For more information see the chapter “Pedals and shoes” and the manuals of the component manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

⚠ WARNING

- Be aware that the distance you need to stop your bike increases, when you are riding with your hands on aero bars or on triathlon bars. The brake levers are not always within easy reach.
- Be sure to use your SCOTT bike only for its intended purpose, as it may otherwise not withstand the stress and fail. Risk of falling!
- Note that both braking effect and tyre grip can be reduced drastically in wet conditions. Look well ahead when riding on wet roads and go well below the speed you would ride at in dry conditions.

⚠ CAUTION

- Make particularly sure there is enough space between your crotch and the top tube **(f)** so that you do not hurt yourself, if you have to get off your bicycle quickly.



⚠ WARNING


- A lack of practice when using clipless pedals or too much spring tension in the mechanism can lead to a very firm connection, from which you cannot quickly step out! Risk of falling!
- In case you had a crash with your SCOTT bike, perform at least the check described in the chapters “Tests before every ride” and “Tests after an accident”. Only ride back very carefully on your SCOTT bike, if it passed the tests without any problems. Do not accelerate or brake hard and do not ride your bike out of the saddle. If you are in doubt, have yourself picked up by car, instead of taking any risk. Back home you need to check your SCOTT bike thoroughly once again. If you are in doubt or if you have any questions, contact your SCOTT dealer!
- For SCOTT road and triathlon bikes as well as time trial machines trailers (a), child carriers (b) and pannier racks are not permitted.

NOTICE

We recommend that you take out private liability insurance. Make sure that coverage for bicycle damage is provided by your insurance. Contact your insurance company or agency.

SAFETY INSTRUCTIONS

- Before towing a trailer with your SCOTT gravel or cyclocross bike read chapter “Notes on the transport of loads and on carrying children and/or pets with your SCOTT bike”.
- Before mounting a pannier rack on your SCOTT Cyclo-Cross or Gravel/Adventure bike, check whether your SCOTT bike is permitted for pannier racks. You will find the respective information in the chapter “Intended use of your SCOTT bike” or in the SCOTT handover report in the Quick Start Manual. Contact your SCOTT dealer.

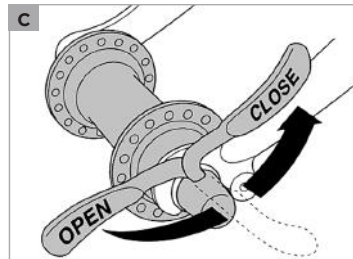

TESTS BEFORE EVERY RIDE

Your SCOTT bike has undergone numerous tests during production and a final check has been carried out by your SCOTT dealer. Nevertheless, be sure to check the following points to exclude any malfunctioning that may be due to the transport of your SCOTT bike or to changes a third person may have performed on your SCOTT bike before delivery:

1. Are the quick-release levers **(c)**, thru axles or nuts of the front and rear wheel, the seat post **(d)** and other components properly closed?

For more information see the chapter “Using quick-releases and thru axles” and the manuals of the component manufacturers.

2. Are the tyres in good condition and do they have sufficient pressure **(e)**? The minimum and maximum pressure (in bar or PSI) is indicated on the tyre side. For more information see the chapter “Wheels and tyres” and the manuals of the component manufacturers.

3. Spin the wheels to check whether the rims are true. If you have disc brakes, watch the gap between frame and rim or tyre and, if you have rim brakes, between brake pad and rim. Untrue rims can be an indication of tyres with ruptured sides or broken spokes.

For more information see the chapter “Wheels and tyres” and the manuals of the component manufacturers.

4. Test the brakes in stationary by firmly pulling the brake levers towards the handlebars **(f)**. The brake pads of rim brakes must hit the rim evenly with their entire surface without touching the tyre during braking, in open condition or in between.

You should not be able to pull the lever all the way to the handlebars. If your bike has hydraulic brakes, check the hydraulic brake cables for oil or brake fluid leaks! Check the thickness of the brake pads, as well.



With disc brakes **(a)** you should have a stable pressure point at once. If you have to actuate the brake lever more than once to get a positive braking response, have the SCOTT bike checked by your SCOTT dealer immediately. For more information see the chapter “Brakes” and the manuals of the component manufacturers.

5. Let your SCOTT bike bounce on the ground from a small height **(b)**. If there is any rattling, check where it comes from. Check the bearings and bolted connections, if necessary. Tighten them slightly, if necessary.
6. If your bike has a kickstand, make sure it is fully raised before you set off. Risk of falling!
7. Do not forget to take a high quality D- **(c)** or chain lock with you on your ride. The only way to effectively protect your SCOTT bike against theft is to lock it to an immovable object.
8. If you want to ride on public roads, make sure your SCOTT bike is equipped according to the applicable regulations of your country **(d)**. Riding without lights and reflectors in dark or dim conditions is very dangerous because you will be seen too late or not at all by other road users. A set of lights that corresponds to the regulations is a must on public roads. Turn on the lights as soon as dusk sets in.

For more information see the chapter “Legal requirements for riding on public roads”.

⚠ WARNING

Do not use your SCOTT bike, if it fails at one of these points! A defective SCOTT bike can lead to serious accidents! If you are in doubt or if you have any questions, contact your SCOTT dealer.

Improperly closed fastenings, e.g. quick-releases, can cause parts of your SCOTT bike to come loose and result in serious accidents!

Be aware that the distance you need to stop your bike increases, when you are riding with your hands on aero bars or on triathlon bars **(e). The brake levers are not always within easy reach.**



Safe fastening of a component with a quick-release

Open the quick-release. You should now be able to read “Open” **(a)** on the lever. Make sure the component to be fastened is in the accurate position.

For more information see the chapters “Adjusting the SCOTT bike to the rider” and “Wheels and tyres” and the manuals of the component manufacturers.

Move the lever back, as if to close it. Now you should be able to read “Close” on the outside of the lever. When you start closing the lever you should feel virtually no resistance with your hand until the lever is at a right angle to the frame/fork **(b)**.

When continuing to close the lever the resistance you feel should increase significantly and towards the end even more strength is required to close the lever. Use the ball of your thumb while your fingers pull on an immovable part, such as the fork **(c)** or a rear stay, but not on a brake disc or spoke, to push it in all the way.

In its end position, the lever should be at a right angle to the quick-release axle **(d)**, i.e. it should not stand out. The lever should lie close to the frame or the fork so that it cannot be opened accidentally. Make sure, however, that the lever is easy to handle for actual quick use.

To check whether the lever is securely locked apply pressure to the end of the hand lever and try to turn it while it is closed **(e)**. If you can turn the lever around, open it and increase the preload. Screw the tightening nut on the opposite side clockwise by half a turn. Close the quick-release lever and check it again for tightness.

Finally lift the bike a few centimetres, so that the wheel no longer touches the ground and hit the tyre from above. If it is properly fastened, the wheel will remain firmly fixed in the drop-outs of the frame or fork without producing any rattling.

If your seat post is equipped with a quick-release mechanism, check whether the saddle is firmly fixed by trying to twist it relative to the frame **(f)**.



⚠ CAUTION

Make sure the levers of both wheel quick-releases are always on the side opposite to the chain. This will help you to avoid mounting the front wheel accidentally the wrong way round. In the case of SCOTT bikes with disc brakes and quick-releases having a 5-mm-axle, it may be reasonable to mount both quick-releases with the lever on the side of the chain drive. This helps you not to come into contact with the hot brake disc and prevents you from having your fingers burnt. If you are in doubt or if you have any questions, contact your SCOTT dealer.

⚠ WARNING

Never ride your SCOTT bike without having checked first, whether the wheels are securely fastened. With an insufficiently closed quick-release the wheel can come loose, thus creating a serious risk of accident!

After wheel mounting test the brakes in stationary. You should reach the pressure point of the brake before the brake lever reaches the handlebars. In the case of hydraulic brakes pump them, if necessary, until you reach a precise pressure point.

NOTICE

If your SCOTT bike is equipped with quick-releases, be sure to lock the frame to an immovable object together with the wheels when you leave it outside. Anti-theft protection!

To be on the safe side you can replace the quick-releases by special locks. They can only be opened and closed with a special, coded key or an Allen key. If you are in doubt or if you have any questions, contact your SCOTT dealer.

SAFETY INSTRUCTIONS

If your SCOTT road bike has thru axles, read the manuals of the thru-axle and wheel manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.



THRU AXLES ON THE SCOTT BIKE

The system from SYNCROS **(a-c)** for road racing and cyclo-cross racing bikes used by SCOTT are thru axles which provide the forks and the rear frames with a higher stiffness. Whenever your SCOTT bike is exposed to high loads, it remains directionally stable.

In the case of SCOTT road or cyclo-cross bikes with disc brakes the system is screwed on the right side. Make sure the axle is torqued to the amount indicated on the axle, using the tool provided or a 6 mm Allen key. Make sure during the assembly that the thru axles, the drop-outs of the fork and the hubs are clean. Clean the components with an absorbent cloth, if necessary, by using water and a little detergent.

In case you do not succeed in adjusting and fixing the wheel, as described, contact your SCOTT dealer.

Safe fastening of components with a quick-release

There is currently a wide range of thru-axle systems available. Some systems are tightened with quick-releases. Other systems may require special tools for assembly or disassembly. And others again have integrated levers.

The thru-axle system typically consists of two operative elements:

1. There is a nut on the right side often integrated into the frame.
2. On the left side there is either a clamping lever which can be folded, a rigid lever for tightening or a tool mount hole, e.g. for an Allen key, 5 mm.

Whatever system you use, make sure during the assembly that the thru axles, the drop-outs in forks and hubs are clean. Clean the components with an absorbent cloth, if necessary, by using water and a little detergent. In case you do not succeed in adjusting and fixing the wheel, as described, contact your bicycle dealer.

Wheel mounting

Slide the wheel into the fork or rear frame, mount the brake disc/rotor at the same time into the brake calliper and guide the chain over the outmost sprocket of the cassette in the case of rear wheels. Make sure that in the area of the rear wheel the chain runs over the sprockets and over both pulleys of the rear derailleur.



Bring the wheel into the right position between the drop-outs and slide the axle with open quick-release lever from the left side through the drop-out and the hub.

When the axle thread engages with the nut thread, turn the axle clockwise. During the first rotations you should be able to rotate the thru axle nearly without resistance. Tighten the axle slightly.

Close the possibly available quick-release lever like a usual quick-release lever.

When you start closing the lever you should feel virtually no resistance with your hand, during the second half of the way the resistance you feel should increase significantly and towards the end even more strength is required to close the lever.

In case you do not succeed in closing the lever fully, re-open it and turn the axle a little anticlockwise. Try again to close the quick-release lever.

Use the palm of your hand to push it in all the way while your fingers pull on the rear frame, but not on a spoke or the brake disc/rotor.

In its end position the quick-release lever should be tight so that it can no longer be turned. Make sure the quick-release lever does not stand out to the rear or to the side. The best position is in parallel to a frame tube. If necessary, modify the nut to change the position.

If it fits perfectly turn the quick-release lever or the tool used clockwise to pre-tighten the thru-axle system. You will feel an increasing resistance at the lever. Only turn the axle until it is hand-tight. Observe the possibly prescribed torque values. In these cases, use a torque wrench and do not exceed the value.

Remove the tool and pack it into the saddle bag. You may need it during the ride.

If you have rim brakes, close the quick-release lever at the brake.

WARNING

Improperly mounted wheels may throw you off your bike or result in serious accidents! Therefore, if you have the slightest doubt, contact your SCOTT dealer and ask him to explain the system of your SCOTT bike to you.

After wheel mounting test the brakes in stationary. You should reach the pressure point of the brake before the brake lever reaches the handlebars. In the case of hydraulic brakes pump them, if necessary, until you reach a precise pressure point.

SAFETY INSTRUCTIONS

Before mounting or replacing a fork/wheel combination with thru-axle system, be sure to read first the manuals of the respective fork or wheel manufacturer. More information are also provided at www.dtswiss.com

ADJUSTING THE SCOTT BIKE TO THE RIDER

Your body height and proportions are decisive for the frame size of your SCOTT bike. Make particularly sure there is enough space between your crotch and the top tube so that you do not hurt yourself, if you have to get off your bike quickly **(a)**.

By choosing a specific type of bicycle you roughly determine the posture you will be riding in **(b+c)**. However, some components of your SCOTT bike are especially designed so that you can adjust them to your body proportions up to a certain degree. This includes the seat post, the handlebars and the stem as well as the brake levers/shifters.

As all works require know-how, experience, suitable tools and skills, you should restrict yourself to adjusting your seating position. Contact your SCOTT dealer, if you are not happy with your seating position or if you want something changed. They will see to your wishes the next time you leave your SCOTT bike at the workshop, e.g. for the first inspection.

After any adjustment/assembly work, be sure to make a short functional check as described in the chapter “Tests before every ride” and do a test ride on your SCOTT bike in an area free of traffic.

! WARNING

If you have a very small frame, there may be the danger of your foot colliding with the front wheel. Therefore, make sure your cleats are properly adjusted.

All tasks described in the following require the know-how of a mechanic and appropriate tools. Make it a rule to tighten the bolted connections always with greatest attention. Increase the torque values bit by bit and check the fit of the component in between. Use a torque wrench and never exceed the maximum torque values! You will find the prescribed values in the chapter “Recommended torque settings for your SCOTT bike”, directly on the components and/or in the manuals of the component manufacturers.



SAFETY INSTRUCTIONS

The seating position depends highly on how you want to use the SCOTT bike. Ask your SCOTT dealer or your trainer for help. The advice given below is suitable for typical SCOTT road bikes.

If sitting on the saddle causes you trouble, e.g. because it numbs your crotch, this may be due to the saddle. Your SCOTT dealer has a very wide range of saddles available and will be pleased to advise you.

ADJUSTMENT OF THE SADDLE TO THE CORRECT HEIGHT

The correct saddle height depends on the length of your legs. When pedalling, the ball of your foot should be positioned above the centre of the pedal axle. With your feet in this position you should not be able to stretch your legs completely straight at the lowest point, otherwise your pedalling will become awkward **(d)**.

Check the height of your saddle with flat-soled shoes. This is best done with suitable cycling shoes.

Sit on the saddle and put your heel on the pedal at its lowest point. Your leg should be fully stretched and your hips should remain horizontal **(e)**.

To adjust the saddle height loosen the quick-release lever (see the chapter “Using quick-releases and thru axles”) or the binder bolt of the seat post clamp at the top of the seat tube. The latter requires suitable tools, e.g. an Allen key, with which you turn the bolt two to three turns anticlockwise. Now you can perform the vertical adjustment of the seat post.

Be sure not to pull out the seat post too far – the mark on the seat post **(f)** (end, max., min., stop or the like) should always remain within the seat tube – and always grease the part of an aluminium or titanium seat post that is inserted into a seat tube made of aluminium, titanium or steel. Do not grease carbon seat posts and/or carbon seat tubes in the clamping area! Use special carbon assembly paste instead.



Align the saddle with the frame by using the saddle nose and the bottom bracket or top tube as a reference point. Clamp the seat post tight again by closing the quick-release, as described in the chapter “Using quick-releases and thru axles” or by turning the seat post binder bolts clockwise in half turns or better in steps of 0.5 Nm increments starting at 3 Nm **(a)**. You should not need much strength in your hands to clamp the seat post sufficiently tight. Otherwise the seat post does not match the frame.

Verify in between that the seat post is sufficiently tight by taking hold of the saddle at both ends and then trying to rotate the seat post inside the seat tube **(b)**. If it does rotate, gently retighten the binder bolt of the seat post clamp by half a turn or better by a quarter turn or in steps of 0.5 Nm increments and do the check again.

Does the leg stretch test now produce the correct result? Check by moving your foot and pedal to the lowest point. When the ball of your foot is exactly above the pedal centre in the ideal pedalling position, your knee should be slightly bent. If this is the case, the saddle height is adjusted to the correct height.

Check whether you can touch the ground safely while sitting on the saddle by stretching your feet to the floor **(c)**. If not, you should lower the saddle until you can, at least to begin with.

WARNING

Never apply grease or oil into a seat tube of a frame made of carbon unless an alloy sleeve is inside the frame. If you mount a carbon seat post, do not put any grease on it, even if the frame is made of metal. Once greased, carbon components may never again ensure reliable clamping! Use special carbon assembly paste instead.

Never ride your bike with the seat post drawn out beyond the limit, maximum, or stop mark! The seat post might break or cause severe damage to the frame. Please make sure the seat post clamp is correctly orientated with the seat post frame clamping slot in the seat tube of the frame. In the case of frames with seat tubes that extend beyond the top of the frame's top tube the seat post should be inserted into the seat tube at least below the bottom of the top tube and below the top of the rear stays! If seat post and frame require different minimum insertion depths, you should opt for the deeper insertion depth.



⚠ WARNING

Make sure not to overtighten the binder bolt of the seat post clamp. Otherwise you may damage the seat post or the frame. Risk of accident!

⚠ CAUTION

Tighten carefully by approaching the prescribed maximum torque value in small steps (0.5 Nm increments) and check in between the proper fit of the component. Never exceed the maximum torque value indicated by the manufacturer!

Children and adolescents need to have the saddle height and the position of saddle and handlebars checked at least every 3 months!

SAFETY INSTRUCTIONS

If the seat post does not move easily inside the seat tube or if it cannot be tightened sufficiently, ask your SCOTT dealer for advice. Do not use brute force!

ADJUSTMENT OF THE HEIGHT OF THE HANDLEBARS

In principle, SCOTT road bikes are sports bikes designed for speed. For this reason alone a SCOTT road bike sets certain basic requirements to the body, the shoulder and the neck muscles. The height of the handlebars compared to the saddle and the distance between saddle and handlebars determine how much your upper body will be inclined forward. Lowering the handlebars gives you a streamlined position and brings more weight to bear on the front wheel. However, it also entails an extremely forward leaning posture which is tiring and less comfortable, because it increases the strain on your wrists, arms, back, upper body and neck. As a general rule you should be able to adopt the three basic positions (**d-f**) on a SCOTT road bike without any problems with your hands around the respective area on the handlebars.

In the case of SCOTT road bikes an Aheadset®-stem allows the vertical adjustment of the handlebars. This requires special knowledge. In this regard, the descriptions hereafter may be incomplete. If you are in doubt or if you have any questions, contact your SCOTT dealer.



⚠ WARNING

- The stem is one of the load-bearing parts of your SCOTT bike. Changes to it can impair your safety. If you are in doubt or if you have any questions, contact your SCOTT dealer!
- These routines require a certain amount of manual skill and (special) tools. Ask your SCOTT dealer to explain you both function and adjustment of your stem or let him do that work.
- The bolted connections of stem and handlebars have to be tightened to the prescribed torque values. If you disregard the prescribed values, the handlebars or stem may come loose or break. Use a torque wrench and never exceed the maximum torque values! You will find the prescribed values in the chapter “Recommended torque settings for your SCOTT bike”, directly on the components and/or in the manuals of the component manufacturers.
- Stems come in varying lengths (a) as well as shaft and binder tube diameters. A stem of inappropriate dimension can become a source of danger: Handlebars, stems or forks can break, resulting in an accident. When replacing any parts be sure to only use parts that bear the appropriate mark and, to be on the safe side, original spare parts from SCOTT or SYNCROS. Your SCOTT dealer will be pleased to help you.
- If you choose to use the product of another manufacturer, make sure it is compatible with the SCOTT/SYNCROS components. SCOTT assumes no responsibility for problems resulting from the use of non-SCOTT/SYNCROS products. Make sure the handlebar/stem-combination is approved by the handlebar and/or stem manufacturer.
- Make sure the handlebar clamping area is free of sharp edges.



Stems for threadless systems – Aheadset®

In the case of SCOTT bikes with Aheadset® headsets the stem also serves to adjust the bearing preload. If you change the position of the stem, you have to readjust the bearing play (see the chapter “The headset on the SCOTT bike” and the manuals of the component manufacturers).

The vertical setting range is determined by the intermediate rings, also referred to as spacers **(b)**. In the case of flip-flop stem models the stem can be mounted the other way round **(c)** to achieve a different handlebar height.

For modifications unscrew the bolt at the top of the fork steerer tube which serves to adjust the initial bearing pressure, remove the Ahead cap and release the bolts on either side of the stem by up to three turns **(d)**. Remove stem and spacers from the fork steerer tube. In doing so keep hold of both frame and fork to prevent the fork from slipping off the head tube. You can determine the handlebar height by the arrangement of stem and spacers. Slip the remaining spacers onto the fork steerer tube above the stem. Adjust the headset, as described in the chapter “The headset on the SCOTT bike”.

If you want to turn the stem around, you have to also release the bolts of the faceplate securing the handlebars **(e)**. If the stem is fitted with a cap, you can simply take out the handlebars at this point. If it is not fitted with a cap, you have to remove the handlebar fittings.

Mount the handlebars and, if necessary, the handlebar fittings, as described in the chapter “Adjustment of handlebar tilt and brake lever/shifter units on SCOTT road bikes and SCOTT cyclo-cross bikes” and/or in the manuals of the component manufacturers.

Check after the adjustment or assembly, whether the handlebars are firmly seated in the stem by trying to rotate the handlebars downwards **(f)**. Verify whether the handlebar/stem-combination can be turned relative to the fork. Do this by taking the front wheel between your knees and trying to twist the handlebars. If there is movement, carefully tighten the bolts a little more by using the torque wrench, observe the maximum torque value and check again the proper fit.

Tighten carefully by approaching the prescribed maximum torque value in small steps (0.5 Nm increments) and check in between the proper fit of the component.

Never exceed the maximum torque value indicated by SCOTT! Ask your SCOTT dealer to explain you both function and adjustment of your stem or, still better, let him do that work.



⚠ WARNING

In the case of turned stems, it is possible that the cables are too short. In this case riding can be unsafe. If in doubt, ask your SCOTT dealer.

NOTICE

When removing spacers (a) the fork steerer tube must be shortened. This change is irreversible. The shortening should be carried out by your SCOTT dealer, but only after you have found your preferred position.

What to bear in mind with SCOTT bikes with carbon steerer

Always make sure before assembly to use a headset compatible with the stem. We recommend the use of a SYNCROS stem and headset when mounting a SCOTT/SYNCROS carbon fork, as they are designed to work together. If you choose to use the product of another manufacturer, make sure it is compatible with the SCOTT/SYNCROS fork. SCOTT assumes no responsibility for problems resulting from the use of non-SCOTT/SYNCROS products.


Never use more than 40 mm stack height of spacers between headset and stem (b). Never use more than 5 mm stack height of spacers above the stem between the stem and the top cap of the headset (b). Do use a minimum of 5 mm stack height of spacers below the stem between the cap of the headset and the stem.

1. The fork steerer, especially in case of a carbon steerer, must be assembled with the originally supplied internal expander wedge (c).
2. NEVER use on carbon fork steerers a standard star flanged nut.
3. When cutting the steerer tube use handtools only (d). Do not use a power saw or a speed cutter but use a hand saw with a fine blade for metal cutting.
4. Once the steerer tube is cut to the desired length, be sure to remove all burrs at the top of the steerer tube. Make sure to wear appropriate safety protection, safety goggles, gloves and breathing mask. Avoid inhaling the carbon dust.

⚠ WARNING

For all bikes with integrated stems or handlebars, please consult with your authorized SCOTT dealer the exact process before disassembly and reassembling.



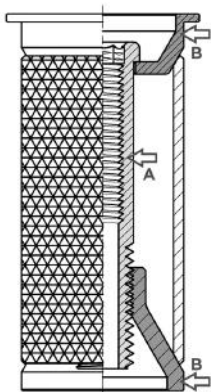

5. Loosen the expander bolt slightly with a 6 mm Allen key at **(A)** so the wedges **(B)** at the top and bottom of the expander moves (make sure not to over loosen as the expander will not tighten when inserted into the steerer).
6. Slide the expander into the carbon steerer **(e)** until it is flush with the top of the steerer.
7. Tighten the expander bolt with the 6 mm Allen key at **(A)** to a torque of 8/9 Nm pressure, making sure that the expander stays flush to the top of the steerer and doesn't lift slightly.
8. Clamp the stem onto the steering tube with a maximum of 5-7 Nm **(f)** and respect also the maximum torque indication of the stem supplier. The lower value indicated on those items has to be accepted as a maximum torque.
9. Make sure the stem has no sharp edges on the contact area for the steerer or the handlebar. This could result in serious accidents. In case you change your stem to another model or brand please contact your authorized SCOTT/SYNCROS dealer. SCOTT will not be liable in case a not originally provided SCOTT or SYNCROS stem is used on the bike assembly. In case of further questions please contact your authorized SCOTT/SYNCROS dealer or the national distributor of SCOTT/SYNCROS.

⚠ WARNING


Use a proper stem and headset design during installation.

We recommend the use of a SYNCROS stem and headset with the installation of a SCOTT/SYNCROS carbon fork as they are designed to work together. If you choose to use another manufacturer's product, make sure it is compatible with this SCOTT/SYNCROS carbon fork. SCOTT assumes no responsibility for problems resulting from non-SCOTT/SYNCROS components.

Never use more than 40 mm stack height of spacers between headset and stem.

Do not use more than 5 mm stack height of spacer above the stem between the top cap of the headset and the stem.

Do use minimum 5 mm stack height of spacer below the stem between the cap of the headset and the stem.



⚠ WARNING

- Modifications in the area of the carbon forks are jobs which should be left to a skilled two-wheel/bicycle mechanic. SCOTT therefore recommends that you ask your SCOTT dealer to do any work on the carbon fork, whenever necessary. Wrong processing and unfavourable stems may lead to breakage. Risk of accident!
- Sawdust from cutting carbon components has a reputation of causing cancer. Therefore, do not blow or sweep the dust off, but remove it with a moist rag. Dispose of it immediately.

SAFETY INSTRUCTIONS

- For all bikes with integrated stems or handlebars, consult with your authorized SCOTT dealer the exact process before disassembly and reassembling.

SADDLE ADJUSTMENT - FORE-TO-AFT POSITION AND HORIZONTAL TILT

The inclination of your upper body **(a)**, and hence your riding comfort and pedalling power, are also influenced by the distance between the grips of the handlebars and the saddle. This distance can be altered slightly by changing the position of the saddle rails in the seat post clamp. However, this also influences your pedalling. Whether the saddle is positioned more to the front or to the back of the bike will alter how rearward the pedalling position of your legs is.

Make sure the saddle is clamped within the range of the marking on the saddle rail, i.e. on the straight part of the rail, never in the curved sections.

You need to have the saddle horizontal in order to pedal in a relaxed manner. If it is tilted, you will constantly have to lean against the handlebars to prevent yourself from slipping off the saddle.

⚠ WARNING

- The bolted connections of the seat post have to be tightened to the prescribed torque values **(b)**. Use a torque wrench and never exceed the maximum torque values! You will find the prescribed values in the chapter "Recommended torque settings for your SCOTT bike", directly on the components and/or in the manuals of the component manufacturers.



⚠ WARNING

Make sure the saddle is clamped within the range of the marking on the saddle rail and not in the curved section of the saddle rails (c). Otherwise the saddle rail can fail! Check the bolts by using a torque wrench once a month according to the prescribed values.

SAFETY INSTRUCTIONS

The setting range of the saddle is very small. Replacing the stem allows you to make far bigger adjustments to the rider's fore-to-aft position, as stems come in different lengths. In doing so you may achieve differences of more than ten centimetres. In this case you usually would have to adjust the length of the cables – a job best left to your SCOTT dealer!

The manufacturers of saddles deliver their products with detailed manuals. Read them carefully before adjusting the position of your saddle. If you are in doubt or if you have any questions, contact your SCOTT dealer.

Adjustment of saddle position and tilt

With **patent seat posts (d)** one or two bolts fix the clamping mechanism, which controls the tilt and the horizontal position of the saddle. Some seat posts have two bolts side-by-side.

Release the bolt(s) at the top of the seat post. Release the bolt(s) two to three turns anticlockwise at the most, otherwise the whole assembly can come apart. Move the saddle forth or back, as desired. You may have to give the saddle a light blow to make it move.

Please observe the markings on the saddle rail. Make sure the seat of the saddle remains horizontal (e) as you retighten the bolt(s). Your SCOTT bike should stand on level ground while you adjust the saddle.

Having found your preferred position, make sure both clamp halves fit snugly around the saddle rails before tightening the bolt(s) to the correct torque value as prescribed by the seat post manufacturer.

Retighten the bolt(s) with a torque wrench according to the manuals of the manufacturer. After fastening the saddle, check whether it resists tilting by bringing your weight to bear on it once with your hands at either end of the saddle (f).



⚠ WARNING

Poorly tightened or loosening bolts can fail. Risk of accident!

Check the bolts by using a torque wrench once a month according to the values indicated directly on the components and/or in the manuals of the component manufacturers.

Clamping with two bolts in line (a): Release both bolts two to three turns anticlockwise, otherwise the whole assembly can come apart. Move the saddle forward or backward as desired to adjust the horizontal position. You may have to give the saddle a light blow to make it move. Please observe the markings on the saddle rail.

Having found your preferred position, make sure both clamp halves fit snugly around the saddle rails before tightening the bolt(s) to the correct torque value as prescribed by the seat post manufacturer.

Tighten both bolts evenly **(b)** so the saddle remains at the same angle. If you wish to lower the nose of the saddle a little, tighten the front bolt clockwise. You might have to loosen the rear bolt a little as well. To lower the rear part of the saddle, the rear bolt has to be tightened clockwise and the front bolt has to be released, if necessary.

After fastening the saddle, check whether it resists tilting by bringing your weight to bear on it once with your hands at either end of the saddle.

⚠ WARNING

Check the bolts by using a torque wrench once a month according to the values indicated directly on the components and/or in the manuals of the component manufacturers.

Poorly tightened or loosening bolts can fail. Risk of accident!



If you have a **single bolt system (c)**, the seat post for most of the sports saddles is designed for a saddle rail diameter of 7 mm.

Replacement outer clamps for ovalized saddle rails of 8 mm x 8.5 mm (W x H) as well as for carbon saddle rails bigger than 8 x 8.5 mm are also available. If you are not sure which saddle rail type you have or if you need further information, contact your SCOTT dealer.

To mount the saddle unscrew the transversal fixing bolt **(d)** as far as possible without loosening the lock nut on the outer side of the clamping device. In general, it is not necessary to take the mechanism completely apart, if it is already equipped with the correct outer clamps for your saddle.

If you do find it necessary to unscrew the single fixing bolt completely, remove it from the clamping device. This releases the outer clamping parts. The inner clamping parts are typically held in position with a rubber retention plate.

Mount the saddle rails into the inner clamping parts, add the outer parts and re-insert the fixing bolt. If the width of the saddle rails does not fit exactly into the clamp grooves, do not try to force them in. The clamping mechanism or the saddle rails could break and result in an accident and/or injuries to the rider.

Use a different saddle model **(e)** or contact your SCOTT dealer.

⚠ WARNING

When choosing another saddle, observe that there are round and ovalized rails. Replace the fitting pieces of the clamp accordingly.

If the saddle rails fit into the clamp grooves, slide the saddle on the seat post and ensure that the clamp is positioned midway along the total length of the rails **(f)**.



Position the saddle so that its upper surface is parallel to the ground. Tighten the bolt gradually and make sure

1. the clamping device is still accurately mounted on the carbon seat post head and
2. the clamp is tightening evenly around each rail.

Once there is uniform hold on both rails, tighten the bolt gradually with a torque wrench **(a)** until you have reached the maximum torque value indicated in Newton metres (Nm) on the seat post.

WARNING

Check the bolts by using a torque wrench once a month according to the values indicated directly on the components and/or in the manuals of the component manufacturers.

Poorly tightened or loosening bolts can fail. Risk of accident!

COCKPIT ADJUSTMENT

Brake lever reach adjustment on SCOTT road bikes and SCOTT cyclo-cross bikes

With road bikes the clearance between brake lever/shifter and handlebar can be adjusted to a minor degree. This gives riders with small hands the convenience of bringing the brake levers closer to the handlebars.

The first phalanx respectively of the index and the middle finger must reach around the brake lever **(b)**. Braking from the top with your hands on the upper end of the brake grips is not an alternative in the long run and in hazardous situations, you need more manual force and cannot support yourself appropriately.

In the case of **Shimano's Dura-Ace** unscrew the chrome cover and tighten the screw positioned in the front **(c)**. In the case of the **Ultegra** you need special insert pieces **(d)**. In the case of both Di2 models you reach the screws from the rear, after you have removed the hoods.



In the case of **SRAM** start by setting the cam disc on the slightly pulled and inward moved shifters. Screw in the screw positioned behind the hood in the body by using an Allen key **(e)**.

In the case of **flat bars** there is a small adjusting bolt where the brake hose of a side-pull brake runs into the brake lever unit or on the lever itself.

Check the proper adjustment and functioning of the brake system subsequently, as described in the chapter “Brakes” and/or in the manuals of the brake manufacturer.

If you have problems reaching the levers, please contact your SCOTT dealer.

⚠ WARNING

Make sure you cannot pull the brake levers all the way to the handlebars **(f)**. Your maximum braking force must be reached short of this point!

Note that the bolted connections of the stem, handlebars and brakes have to be tightened to the specified torques. You will find the respective values in the chapter “Recommended torque settings for your SCOTT bike” or in the manuals of the component manufacturers. If you disregard the prescribed values, the components may come loose or break. This can lead to a severe crash.

SAFETY INSTRUCTIONS

In the case of hydraulic brakes and disc brakes follow the manual of the brake manufacturer. If you are in doubt or if you have any questions, contact your SCOTT dealer.

Some manufacturers offer brake levers/shifters which are suitable for small hands. If you have any problems with the brake lever reach, contact your SCOTT dealer.



Adjustment of handlebar tilt and brake lever/shifter units on SCOTT road bikes and SCOTT cyclo-cross bikes

The straight extensions below the drops should be parallel to the ground or point slightly downwards towards the rear **(a)**. The grips of the brake lever/shifter units are horizontal or point slightly upwards. The ends of the brake lever/shifter units should meet an imaginary extension of the bottom line of the drops.


Shifting the brake levers/shifters is a job best left to your SCOTT dealer, as it involves retaping the handlebars afterwards.

To adjust the tilt of the handlebars, release the Allen bolt(s) on the underside or front side of the stem. Turn the handlebars to the desired position. Make sure the handlebars are accurately centred in the stem.

Carefully retighten the bolt(s) with the torque wrench. Make sure the upper and lower clamping slots of the stem are parallel and identical in width **(b)**. If you have a stem with several bolts, tighten them evenly in a cross pattern **(c)** by using a torque wrench and observe the recommended torque values.

Check by trying to rotate the handlebars relative to the stem and tighten the bolt a little more, if necessary **(d)**.

Use a torque wrench and do not exceed the maximum torque values given in the chapter “Recommended torque settings for your SCOTT bike” or in the manuals of the component manufacturers. If you disregard the prescribed values, the components may come loose or break. This can lead to a severe crash.

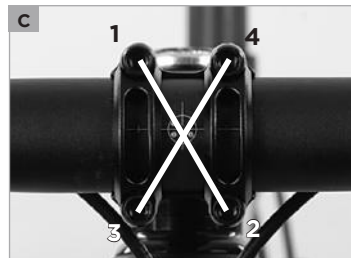

What to bear in mind with aero bars on SCOTT triathlon bikes and SCOTT time trial machines

In triathlon sport and time trial, where a particularly aerodynamic seating position is important, so-called aero bars (**e**) are commonly used. With these aero models the shifters are often positioned at the handlebar ends, the brake levers at the ends of bull-horn handlebars.

When you ride with your back in a horizontal position, the brake levers are out of reach and the reaction time is longer, which makes your stopping distance longer. For this reason it is very important to anticipate problems when riding.

Within certain limits the position of the handlebars can be adjusted according to your personal preferences. That means that the straight part of the aero bars should point downwards or upwards to an only minor degree. The basic handlebars should be parallel to the ground or point slightly upwards. Make sure your forearms are always comfortably rested, i.e. your elbows should project beyond the armrests a little towards the rear (**f**). Bring the armrests in a position which allow you to breathe freely.

WARNING

Note that the distance you need to stop your bike increases, while riding with the hands on the top handlebars or in aerodynamic position. The brake levers are not always within easy reach.

SCOTT triathlon bikes and SCOTT time trial machines have specific riding characteristics. Make yourself familiar with your new SCOTT triathlon bike or with your new SCOTT time trial machine in an unfrequented area and approach the riding characteristics step by step.



BRAKES

Brakes **(a)** are used for adjusting one's speed to the surrounding terrain and traffic. In an emergency situation, the brakes must bring your SCOTT bike to a halt as quickly as possible.

In the event of such emergency brakings, the rider's weight shifts forward abruptly, thus reducing the load on the rear wheel. The rate of deceleration is primarily limited by the danger of the rear wheel losing contact with the ground **(b)**, resulting in an overturning of the SCOTT bike and, secondly, by the grip of the tyres on the road. Such a problem becomes particularly acute when riding downhill. Therefore, in case of an emergency braking you should try to shift your weight towards the rear and the ground as far as possible.

Actuate both brakes simultaneously **(c)** and bear in mind that, due to the weight transfer, the front brakes can generate a far better braking effect on a surface with good grip.


Make yourself familiar with the operation before you set off for the first time. Practise braking on different kinds of surfaces in an area free of traffic.

Wet weather reduces the braking power. Actuate the brakes carefully when riding on wet or slippery ground, as the tyres can easily slip away. Therefore, reduce your speed when riding in such conditions.

There are various types of brake systems that may be subject to the following problems:

Too long braking or brake dragging can result in an overheating of the **rim brakes**. This can damage the inner tube or make the tyre slip on the rim causing a sudden loss of air which could lead to a serious accident in the process.

With **disc brakes (d)** prolonged braking or permanent dragging of brake pads can lead to an overheating of the brake system. This can result in a reduction of the braking power or brake failure. Risk of accident!

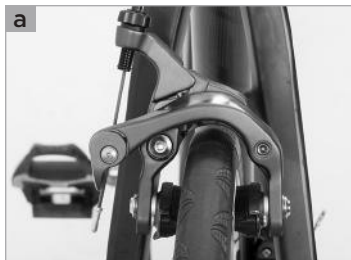

When riding downhill, get used to braking hard and then releasing the brake again, whenever the road surface and the situation allows for it. If you are in doubt about the braking action, stop and let the brake system cool down.

⚠ WARNING

- The assignment of brake lever to brake calliper can vary, e.g. left lever acts on front brake (c). Have a look at the handover report in the Quick Start Manual and check whether the brake lever of the front brake is on the side you are used to (right or left). If it is not, ask your SCOTT dealer to switch the brake levers before you set off for the first time.
- Be careful while getting used to the brakes. Practise emergency stops in a place clear of traffic until you are comfortable controlling your SCOTT bike. This can save you from having accidents in road traffic.
- Wet weather reduces the braking effect and the road grip of the tyres. Be aware of longer stopping distances when riding in the rain, reduce your speed and actuate the brakes carefully.
- Ensure that the braking surfaces and brake pads are absolutely free of wax, grease and oil (e). Risk of accident!

SAFETY INSTRUCTIONS

- When replacing any parts be sure to only use parts that bear the appropriate mark and, to be on the safe side, original spare parts (f). Your SCOTT dealer will be pleased to help you.
- Be sure to read the manuals of the brake manufacturers before you start to readjust or to service the brake or before doing any work whatsoever.



RIM BRAKES

Racing and side-pull brakes

Operation and wear

Actuating the levers on the handlebars **(a)** and cables **(b)** causes a brake pad to be pressed against a brake surface. The ensuing friction slows down the wheel. If water, dirt or oil come into contact with one of the braking surfaces, this changes the coefficient of friction and deceleration is reduced. This is why brakes respond with a slight delay and less powerfully in wet weather.

In order to maintain their effectiveness, brakes need to be checked and readjusted regularly.

The friction generated by braking causes wear to the brake pads as well as to the rims. Frequent rides in the rain and dirt and over hilly terrain can accelerate wear on both braking surfaces. Some rims are provided with wear indicators, e.g. grooves or circular indentations. If the rim is worn down to the point where the grooves or indentations are no longer visible, they need to be replaced. Once the abrasion of the rim has reached a certain critical point, the rim may break under the tyre pressure. This can make the wheel jam or the inner tube burst, both of which can cause an accident. Risk of falling!

Functional check

Test the brakes in stationary by firmly pulling the brake levers towards the handlebars. The brake pads of rim brakes must hit the rim evenly with their entire surface without touching the tyre during braking, in open condition or in between.

Check whether the brake pads are accurately aligned with the rims and still sufficiently thick. You can judge the wear of the brake pads by the appearance of grooves. If the pads are worn down to the bottom of the grooves **(c)**, it is time to replace them. Be sure to observe the appropriate instructions of the respective manufacturer.

The brake levers must always remain clear of the handlebars. You should not even be able to pull them all the way to the handlebars in the event of an emergency stop. If this is the case, however, observe the following chapter “Synchronising and readjusting”.



See your SCOTT dealer and ask him to examine the remaining thickness of the rims when you are through your second set of brake pads at the latest. Your SCOTT dealer has special measuring devices for determining the remaining thickness of the rims.

Both brake arms must hit the rim simultaneously, when you actuate the brake lever. They must keep off the tyre.

A correctly adjusted brake is only ensured if all of these checks have been made successfully.

⚠ WARNING

- Brake cables that are damaged (**d**), e.g. frayed, should be replaced immediately, as they can otherwise fail in a critical moment, possibly causing a crash!
- Adjusting the position of the brake pads relative to the rims requires a considerable degree of skill. Replacing and adjusting the brake pads is a job best left to your SCOTT dealer.
- Have your rims regularly inspected and measured by your SCOTT dealer (**e**).

Synchronising and readjusting

With dual pivot brakes, turn the small (headless) screw located at the side or on top of the calliper (**f**), until the left and right brake pad are at the same distance from the rim.

Also check whether the bolt by which the brake is screwed to the frame is still tightened to the proper torque, i.e. according to the torque value given in the chapter “Recommended torque settings for your SCOTT bike”.

The position of the brake lever where the brake starts to act, also referred to as pressure point, can be adjusted to the size of the hand as well as to individual convenience by readjusting the brake cable. Make absolutely sure you cannot pull the brake lever all the way to the handlebar grip.



With an unapplied brake the brake pads should not be too close to the rim sides, otherwise they could drag along the rim during riding. Before making this adjustment, observe the notes in the chapter “Brake lever reach adjustment on SCOTT road bikes and SCOTT cyclo-cross bikes”.

With ongoing brake pad wear, the pressure point at the brake lever moves towards the handlebars. Check the free travel at regular intervals; it should not be longer than a quarter of the whole travel. For readjustment turn the knurled nut or bolt **(d)** through which the cable runs into the brake body until the lever has the desired travel. Test the brakes subsequently in a place free of traffic.

 **WARNING**

Always test the brakes' function when stationary after adjusting them, making sure the brake pads engage fully with the rim without touching the tyre when you pull them hard. Make sure you cannot pull the lever all the way to the handlebars.

DISC BRAKES


Operation and wear

The most striking feature of disc brakes **(e)** is their outstanding braking effect. They respond a lot faster in wet conditions than rim brakes do and achieve their normal high braking power within a very short time. They require little maintenance and do not wear down the rims as rim brakes do. Disc brakes consist of the brake calliper, the rotor, the brake lines (hydraulic) or cables (mechanical) as well as the brake lever unit. Actuating the brake lever compresses the hydraulic pistons through hydraulic pressure or mechanically, pushing the brake pads against the rotor.

The friction generated by braking causes wear to the brake pads as well as to the rotors. Frequent rides in the rain and dirt can accelerate wear on both braking surfaces. Depending on the manufacturer and the model there are different ways of checking the brake pads and rotors for their wear limits.

⚠ WARNING

- **New brake pads have to be bedded in before they reach their optimal braking performance. Accelerate your SCOTT bike about 30 to 50 times to around 30 kmh and bring it to a halt each time. This procedure is finished, when the force required at the lever for braking has stopped decreasing.**
- **Dirty brake pads and rotors can lead to drastically reduced braking power. Therefore, make sure the brake remains free of oil and other fluids, especially when you clean your SCOTT bike or grease the chain. Dirty brake pads can under no circumstances be cleaned, they must be replaced! Rotors can be cleaned with special brake cleaners or with warm water and mild soap.**
- **Unusual noises (scratching, chafing etc.) during braking and/or a noticeable change of the braking force (stronger or weaker) are indications that the brake pads are soiled or worn down **(f)**. Check the brake pads and replace them, if necessary. Otherwise you risk further damage, e.g. to the rotor, or even an accident due to brake failure! If you are in doubt, contact your SCOTT dealer.**

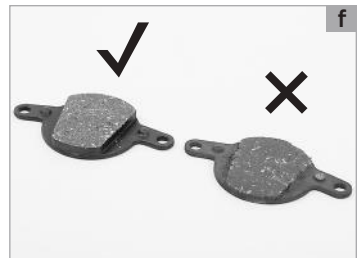

⚠ CAUTION

Disc brakes get hot in use. For this reason do not touch the brakes directly after stopping, especially after a long downhill ride.

NOTICE

If your SCOTT bike has disc brakes, be sure to mount the safety locks (a) before transporting your bike with the wheels dismantled.

Hydraulic disc brakes

Functional check

Regularly check the lines and connections for leaks while pulling on the lever. Contact your SCOTT dealer immediately in the event of a brake liquid leakage. A leak in the brake lines can render the brake ineffective. Risk of accident!

Wear and maintenance

Hydraulic disc brakes have a mechanism which automatically compensates for the worn down brake pads. The brake lever travel does not change (b).


Check the pads for wear at regular intervals (c) by following the service instructions in the manuals of the respective manufacturer.

⚠ WARNING

Loose connections and leaky brake lines drastically impair braking power. If you find leaks in the brake system or buckled lines, contact your SCOTT dealer immediately!

Do not transport your SCOTT road bike with saddle and handlebars upside down – risk of brake failure. Never turn it upside down for repair works (d).

Do not open the brake lines. Brake fluid that can be very unhealthy and damaging to the paint could leak out and render the brake ineffective.

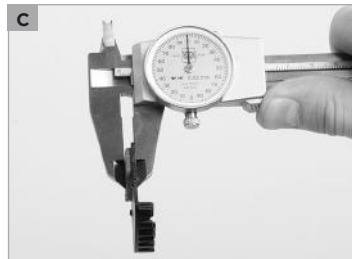

⚠ WARNING

- A heavily clogged brake can lead to squeaking noises during braking.
- Pull the brake lever and secure it with a strong elastic strap (e), when transporting your SCOTT bike with hydraulic disc brakes. This will prevent air from entering the system.
- Read in any case the manual of the brake manufacturer carefully before removing the wheel or doing any maintenance work. Improper operation can lead to brake failure.

SAFETY INSTRUCTIONS

- If your brake system works with DOT brake fluid, the latter needs to be replaced regularly according to the intervals prescribed by the manufacturer.



Mechanical disc brakes

Functional check

The more brake pads of mechanical disc brakes wear down, the longer is the brake lever travel. Regularly check whether you get a positive braking response before the lever touches the handlebars **(a)**. Make sure the brake cables are in sound condition!

⚠ WARNING

Damaged cables should be replaced immediately, as they can snap. Risk of accident!

Wear and maintenance

To a certain extent, wear of the brake pads can be compensated directly at the additional brake lever, if mounted. Unscrew the knurled lock nut on the bolt through which the cable enters the grip and then unscrew the bolt **(b)** until the lever has the desired travel. Retighten the lock nut by taking care that the slot of the bolt does not face upward or forward, as this would permit an unnecessarily high amount of water or dirt to enter.

As an alternative, the cable can be retightened directly at the brake in the same way.

After readjusting check the functioning and make sure the brake pads do not drag when releasing the brake lever and spinning the wheel.

Repeated readjustment at the brake lever makes the arm on the brake calliper change its position. This can reduce braking power and result in a complete brake failure in an extreme case. Risk of accident!

Some models offer further ways of adjusting the brakes directly at the brake calliper, though this requires a certain amount of skill **(c)**. Read the manual of the brake manufacturer carefully before adjusting the brake. If you are in doubt or if you have any questions, contact your SCOTT dealer.

⚠ WARNING

Repeated readjustment at the brake cable can drastically reduce the maximum braking performance.



⚠ WARNING

Read in any case the manual of the brake manufacturer carefully before removing the wheel or doing any maintenance work. Improper operation can lead to brake failure.

GEARS

DERAILLEUR GEARS

The gears **(d+e)** of your SCOTT bike serve to adjust the gear ratio to the terrain you are riding on and the desired speed.

A low gear (where in the case of derailleur gears the chain runs on the small chainring and a large sprocket **(f)**) allows you to climb steep hills with moderate pedalling force. You must, however, pedal at a faster pace or higher frequency. High gears (large chainring, small sprocket) are for riding downhill. Every turn of the pedals takes you many metres forward at correspondingly high speed.

In general, your pedalling speed, also referred to as cadence, should be higher than 60 strokes a minute. Racing cyclists pedal at a rate between 90 and 110 strokes a minute on level ground. When climbing uphill, your cadence will naturally fall off somewhat. Your pedalling should, however, always continue to flow.

Continue pedalling during gear shifting, however, at clearly reduced pedalling force. In particular when shifting through the chainrings continue pedalling slowly and without force.

⚠ WARNING

Practise switching gears in a place free of traffic until you are familiar with the functioning of the brake lever/shifter unit or the shifter of your SCOTT bike.



SAFETY INSTRUCTIONS

Read in any case carefully the manual of the gear manufacturer. Make yourself familiar with your new gears in an area free of traffic, if necessary. If you are in doubt or if you have any questions, contact your SCOTT dealer.

Operation and control

Derailleur gears always work according to the following principle:

Large front chainring – high/heavy gear – higher gear ratio
Small front chainring – low/easy gear – lower gear ratio
Large rear sprocket – low/easy gear – lower gear ratio
Small rear sprocket – high/heavy gear – higher gear ratio

Normally, the shifters are mounted as follows:

Shift lever right – rear sprockets



Shift lever left – front chainrings

Modern SCOTT road bikes can have up to 33 gears. As there are, however, overlapping ranges, actually 15 to 18 gears are usable. It is not advisable to use gears which involve an extremely oblique run of the chain, as this reduces power transmission efficiency and hastens wear of the chain.

The chain runs unfavourably when the smallest chainring is used with one of the two or three outermost (smallest) sprockets **(a)** or when the largest chainring is used with one of the inmost (largest) sprockets **(b)**.

The bottom bracket is the interface between cranks and frame. There are different designs, in some cases the bearing spindle is part of the bottom bracket, in some other cases it is integrated into the right crank. Sealed bottom brackets are maintenance free and delivered without play ex works. The bottom bracket in the frame must be checked for play at regular intervals.

Also check at regular intervals whether the cranks are firmly attached to the bearing spindle or whether there is play. Grab the crank and try to jiggle it forcefully. It must be absolutely free of play. If you notice any play, contact your SCOTT dealer immediately.



Depending on the gear system, gear shifting is initiated by actuating a brake lever/shifter unit **(c)** or a shifter **(d)** in the case of flat bars. Continue pedalling during gear shifting, however, at reduced pedalling force.

The most common brake lever/shifter units and their operation are explained in the following. It is, however, also possible that your new SCOTT road bike has a gear system that is not mentioned below.

With the **SRAM eTAP / AXS Road (e)** the gears on the rear derailleur are shifted by actuating one of the buttons respectively at the brake levers/shifters. With the AXS Road it is freely configurable whether the left or the right button shifts to an easier or harder gear.

By keeping one of the buttons pressed the gears are shifted through on the rear derailleur until you release the button. By actuating both buttons at the same time the front derailleur changes to the other chainring.

By means of the SRAM AXS app various individual settings can be made to the gear system.

More information is provided at www.sram.com

In the case of **Shimano Dual Control (f)** brake lever/shifter units you shift to the larger chainrings or sprockets by moving the entire brake lever inwards. You can shift up to two chainrings or three sprockets per gear shift. By moving the small lever alone that is located behind the brake lever the chain moves towards the smaller chainrings or sprockets, but only one sprocket per tap.

The **Shimano Di2** is the electronic version of the high-quality drive groups from Shimano. Instead of cables the signal is transmitted by wires. The rear and the front derailleurs are moved by small electrical motors. The power supply is provided by a rechargeable battery that is mounted to the frame or in the seat post.







The shifters are positioned and actuated like the mechanical gears: With a Di2 you must only press control buttons, instead of pressing the entire brake lever or the lever positioned behind inward as is the case with usual dual control shifters from Shimano. Shift to the larger sprockets by pressing the long control button on the side of the brake lever. When you press the triangular control button that is behind the brake lever the chain moves onto the smaller cogwheels.

With Shimano and SRAM bar end shifters **(a)** for triathlon and time trial use the shifting lever is pressed downward to move the chain to the smaller sprockets to achieve a higher gear and to the smaller chainrings to achieve a lower gear. By pulling the shifter upwards you can shift to the larger chainrings or sprockets.

The shifters for flat bars **(b)** are located underneath the handlebars. The right-hand, big shifter is actuated with the thumb. The chain moves on larger sprockets, i.e. to lower gears. The smaller shifter is actuated either with the index finger **(c)** or with the thumb and shifts into the other direction. By actuating the big shifter with the thumb on the left side you shift to the larger chainring, i.e. to a higher gear ratio.

WARNING

-  Always wear straight-cut trousers or use trouser clips or the like to make sure your trousers do not get caught in the chain or the chainrings. Risk of falling!
-  Shifting gears under load, i.e. while pedalling hard, can make the chain slip. At the front derailleur the chain may even slip off the chainrings and result in an accident! At least the service life of the chain will be shortened considerably.
-  If there is play between bearing shaft and cranks, they can slip off and sustain damage. Risk of falling!
-  Practise switching gears in a place free of traffic until you are familiar with the functioning of the brake lever/shifter units or the shifters of your SCOTT road bike.



NOTICE

Avoid gears which involve an extremely oblique run of the chain, as this will increase wear!

It is crucial when switching gears to continue pedalling smoothly and without too much force. Do not shift under load, and in particular not at the front derailleur, as this will shorten the service life of your chain considerably. Furthermore, this can lead to chain-suck, i.e. the chain can get jammed between chainstay and chainrings.

SAFETY INSTRUCTIONS

Read in any case carefully the manual of the gear manufacturer. Make yourself familiar with your new gears in an area free of traffic, if necessary. If you are in doubt or if you have any questions, contact your SCOTT dealer.

Checking and readjusting

The derailleur gears of your bike were carefully adjusted by your SCOTT dealer before delivery. However, Bowden cables may stretch a little on the first kilometres, making gear shifting imprecise and the chain rattle.

Adjusting the rear **(d)** and front derailleur **(e)** accurately is a job for an experienced mechanic. If you want to try to do the adjustment on your own, observe in addition the manual of the gear manufacturer. If you have any problems with the gears, contact your SCOTT dealer.

⚠ WARNING

For your own safety, bring your SCOTT bike to your SCOTT dealer for its first inspection after 100 to 300 kilometres, 5 to 15 hours of initial use or four to six weeks, and at the very latest after three months.



Adjusting the rear derailleur

Increase the tension of the Bowden cable by turning the adjustable in-line barrel adjusters **(a)** or the adjusting bolt through which it runs into the rear derailleur **(b)**. To do so, shift to the smallest sprocket and turn the bolts anticlockwise in half turns until the cable is slightly tensioned.

After tensioning the Bowden cable check whether the chain immediately climbs onto the next larger sprocket. To find out you lift the rear wheel and turn the cranks by hand or ride the SCOTT bike and shift through the gears.

If the chain easily climbs onto the next larger sprocket, check whether it just as easily shifts to the small sprockets. If it does not, release the respective adjusting bolt a little. You may need several tries.

WARNING

Adjusting the front and rear derailleur accurately is a job for an experienced mechanic. Observe in any case the manual of the gear manufacturer. If you have any problems with the gears, contact your SCOTT dealer.

SAFETY INSTRUCTIONS

Ask a helper to lift the rear wheel or hang the SCOTT bike into a work stand. By turning the cranks and shifting through you can easily check the function.

Adjusting the limit stops

The rear derailleur is equipped with limit screws **(c)** which limit the movement range of the derailleur, thus preventing the derailleur and chain from colliding with the spokes or the chain from dropping off the smallest sprocket. The limit screws are adjusted by your SCOTT dealer. They do not alter their position during normal use.

If your SCOTT road bike fell over to the chain side or if you mount another wheel, it is imperative that you check the limit stops.



Shift with the right shift lever to the highest gear. The inner cable is relaxed and the chain running on the smallest sprocket. Look from the rear of the bicycle at the cassette and check whether the teeth of the smallest sprocket and the teeth of the top guide pulley are all in a perfectly vertical line. If necessary, correct the position of the jockey wheels by means of the limit screws **(d)**. The limit screws on rear derailleurs are often marked "H" for high gear and "L" for low gear. High gear means that the chain is running on the smallest sprocket.

If the screws are not marked, you will have to find out by trial and error. Turn one of the screws by counting the number of turns and watch the rear derailleur. If it does not move, you are turning the wrong one. Turn back the counted rotations to find its original position.

Turn the screw clockwise to move the rear derailleur towards the wheel and anticlockwise to move it away from the wheel.

Shift carefully to the largest (inmost) sprocket **(e)** and check whether the teeth of the sprocket and the teeth of the guide pulley are all in a perfectly vertical line. Turn the limit screw marked "L" clockwise until the rear derailleur stops moving towards the spokes and can neither be moved by actuating the shift lever nor by pushing it with your hand **(f)**. Carefully turn the cranks while checking.

This adjustment prevents the chain from getting stuck between sprocket and spokes or the rear derailleur or the derailleur cage from touching the spokes, which could result in damage to the spokes, the rear derailleur and the frame. In the worst case, this could result in a fall or accident.

WARNING

Do a test ride in a place free of traffic, after adjusting the gears of your bicycle.

If your SCOTT road bike has tipped over or the rear derailleur received a blow, the rear derailleur or its mount, also referred to as the derailleur hanger, might be bent. It is advisable to check its range of movement and readjust the limit screws, if necessary, after such an incident or after mounting a new rear wheel on your bike.

SAFETY INSTRUCTIONS

Let your SCOTT dealer maintain and service your SCOTT road bike regularly.



Adjusting the front derailleur

The range within which the front derailleur **(a)** keeps the chain on the chainring without itself touching the chain is very small. If the chain tends to jump off the chainring, you will need to reduce the movement range in the same way as with the rear derailleur, i.e. by turning the limit screws marked “H” and “L” **(b)**. The limit screws are adjusted by your SCOTT dealer. They do not alter their position during normal use.

Start by shifting to the large chainring (front) and the smallest sprocket (rear) **(c)**. Turn in the outer limit screw (“H”) exactly to the point where the chain does not touch the front derailleur, even under heavy load. And only at the point where the chain does not move any more from the middle to the large chainring, the limit screw can be released a little.

Continue by shifting to the smallest chainring (front) and the biggest sprocket (rear). Turn in the inner limit screw (“L”) exactly to the point where the chain does not touch the front derailleur. And only at the point where the chain does not move any more from the middle to the small chainring, the limit screw can be released a little.

This adjustment prevents the chain from falling off, which would suddenly interrupt the drive involving the risk of an accident. In cases of doubt this adjustment is a job best left to your SCOTT dealer.

As with the rear derailleur, the cable of the front derailleur is subject to lengthening which leads to a reduced precision in gear changing. If necessary, shift to the small chainring and increase the tension of the Bowden cable by turning the adjusting bolt through which it passes at the entry to the in-line barrel adjusters.

WARNING

- Always check after an accident whether the guide plates of the front derailleur are still parallel to the chainrings **(d)**. Make sure they do not touch the large chainring which would block the drive. Risk of accident!
- Adjusting the front derailleur is a very delicate job. Improper adjustment can cause the chain to jump off, thus interrupting the power train. Risk of falling!



⚠ WARNING

Do a test ride in a place free of traffic, after adjusting the gears of your bicycle.

SAFETY INSTRUCTIONS

Some front and rear derailleurs have very specific set-up instructions. Consult your authorized SCOTT dealer or read the manual of the component manufacturer.

Shimano Di2

Adjustment and maintenance

If you wish, your SCOTT dealer can also change the functioning of the Di2 control buttons **(e)**. The change has to be done with a special test device from Shimano which is also used for troubleshooting.


If you have smaller hands and want to position the levers closer to the handlebars, there are special adjusting screws on the handlebars. The handling of these screws is described in the chapter “Brake lever reach adjustment on SCOTT road bikes and SCOTT cyclo-cross bikes”.

To adjust the rear derailleur shift into one of the middle gears. Press the button at the front switch under the handlebars until the control lamp illuminates red **(f)**. The fine adjustment of the rear derailleur can now be carried out. Turn the crank and listen to the noise of the chain while running.

If there is a noise when the chain rolls off, press the front lever. With every push the rear derailleur moves inward by one decimillimetre. If the noise gets louder, press the rear lever.

The rear derailleur moves outwards in steps of one decimillimetre. Once the chain runs quietly, press the button at the switch once again, the red light goes out. Finish by shifting through all the gears to check the proper functioning.

Carefully shift through the gears until the chain runs on the biggest sprocket. If the shifting is not smooth, readjust once again.

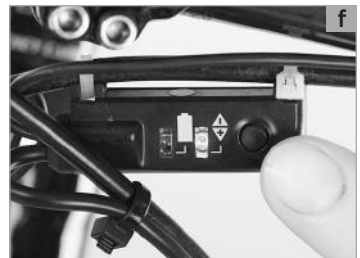

Continue turning the crank carefully and make sure the rear derailleur cage does not collide with the spokes and the chain does not move beyond the biggest sprocket. While doing so, press your thumb against the rear derailleur **(a)**.

In principle, the limit stops are adjusted like the limit stops of the mechanical gears **(b)**. Be careful when shifting to the lowest and biggest gears in order to check the position of the limit stops.

⚠ WARNING

Make a test ride in a place free of traffic before you use your new Di2 gears (c).

SAFETY INSTRUCTIONS

Read the manuals of the gear manufacturer. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

Rechargeable battery

A new, fully charged battery allows you to ride approx. 1,000 to 2,000 km. If the battery is charged to around 25 %, then this will be enough for around 250 kilometres.

Rechargeable batteries have no memory effect. The battery can therefore be recharged **(d)** without having run completely empty.

If the battery is dying, the front derailleur is the first to stop working. In this state you can still ride a few kilometres and change gears with the rear derailleur. The battery should, however, be recharged as soon as possible. When the rechargeable battery is empty, the rear derailleur remains in the last chosen gear. Shifting into another gear is no longer possible **(e)**!

You can check the battery's state of charge at any time. To do so, press one of the control buttons and keep it in this position for half a second at least. The LED on the control unit indicates the state of charge:

- green light is on for about 2 seconds: state of charge of the battery 100 % **(f)**
- green light blinks 5 times: state of the charge of the battery approx. 50 %
- red light is on for about 2 seconds: state of the charge of the battery approx. 25 %
- red light blinks 5 times: state of charge of the battery empty



The capacity of the battery and hence the distance that you can ride drop gradually over time. This is unavoidable. You must replace the battery if the distance that you can ride is no longer sufficient for your requirements.

⚠ WARNING

Only use the supplied charger to charge the battery!

NOTICE

If the rechargeable battery is not used for a longer period of time, it should neither be empty nor full. Keep the nearly charged battery (50 % to 60 %) in a dry, cool place and out of the reach of children. After three months at the latest you should check the state of charge. Protect the contact areas of your rechargeable battery with the protective covers before storing the battery.

Charging of a (fully discharged) battery takes around one and a half hours.

SRAM ETAP/AXS ROAD

Adjustment and maintenance

With SRAM eTAP/AXS Road, you shift the gears on the rear derailleur by actuating one of the buttons on each shift/brake lever. Whether the left or the right button shifts a lighter or heavier gear is freely configurable with the AXS Road.

With one of the buttons pressed, the gears on the rear derailleur continue to change until the button is released again. If both buttons are pressed at the same time, the front derailleur, if present, changes to the other chainring.

With the SRAM AXS app a wide range of individual settings can be made on the gear system.

You find more information at www.sram.com



BICYCLE CHAIN

Regular and correct lubrication of your bicycle chain ensures enjoyable riding and prolongs its service life. It is not the quantity but the distribution and regular application of lubricant that counts. Clean the dirt and oil off your chain with a slightly oily rag from time to time **(a)**. Special degreasers are not necessary; they even have a damaging effect.

Having cleaned the chain as thoroughly as possible, apply chain oil, wax or grease to the chain links **(b)**. To lubricate the chain, drip the lubricant onto the rollers of the lower run of the chain while you turn the crank. Once this is done, turn the cranks a few more times; then let your SCOTT bike rest for a few minutes so that the lubricant can disperse. Finally wipe off excess lubricant with a rag so that it does not spatter around during riding or can collect road dirt.

⚠ WARNING

Make sure the braking surfaces of the rims, the rotors and the brake pads remain clear of lubricants, otherwise the brake can fail!

NOTICE

For the sake of the environment, use biodegradable lubricants only. Bear in mind that some of the lubricant can end up on the ground, especially in wet conditions.

CHAIN MAINTENANCE

Although the chain is one of the wearing components of your SCOTT bike, there are still ways for you to prolong its life. Make sure the chain is lubricated regularly, especially after riding in the rain. Try to only use gears which run the chain in the straightest line between the sprockets and chainrings and get into the habit of high cadence pedalling.

Chains on bicycles with derailleur gears are worn out after approx. 1,000 to 3,500 km or 50 to 125 hours of use. Heavily stretched chains impair the operation of derailleur gears. Cycling with a worn-out chain also accelerates the wear of the sprockets and chainrings.



Replacing these components is relatively expensive compared with the costs of a new chain. It is therefore advisable to check the condition of the chain at regular intervals.

Your SCOTT dealer has accurate measuring instruments to check the chain wear **(c)**. Replacing the chain should ideally be left to an expert, as this requires special tools. In addition, you need to select a chain matching your gear system.

⚠ WARNING

An improperly joined or heavily worn chain can break and cause an accident.

SAFETY INSTRUCTIONS

When replacing your chain, only use appropriate and suitable original spare parts **(d). Your SCOTT dealer will be pleased to help you.**

WHEELS AND TYRES

The wheel consists of the hub, the spokes and the rim. The tyre is mounted onto the rim so that it encases the tube in the case of the most common system, i.e. the clincher or folding tyres. There is a rim tape running around the rim well **(e)** to protect the sensitive tube against the edges of the rim trough, which are often sharp.

Another system comprises the **tubular tyres** which are glued on specific rims. A third system comprises **tubeless tyres** which also require specific rims.

The wheels are subjected to considerable stress through the weight of the rider and any carried luggage as well as through bumpy road surfaces and terrain. Although wheels are manufactured with great care and delivered accurately trued, spokes and nipples can lose a little tension on the first kilometres. Ask your SCOTT dealer to check and true up the wheels after you have bedded them in over about 100 to 300 kilometres or 5 to 15 hours of use.

After the bedding-in period, check the wheels regularly **(f)**. It will, however, rarely be necessary to tighten the spokes.



NOTICE

Truing (retruing) wheels is a difficult job which you should definitely leave to your SCOTT dealer.

NOTES ON TYRES, INNER TUBES, RIM TAPE, INFLATION PRESSURE

The tyres should provide grip and traction. At the same time they should run smooth and enhance the rider's comfort by absorbing small shocks. Both the rolling friction and the grip depend on the nature of the tyre carcass, the rubber compound and the tyre tread. Your SCOTT dealer will be pleased to help you choose from the numerous types of tyres.

If you want to mount a new tyre, you need to observe the sizing system and the actual size of the old tyre. The latter is specified in two different units on the side of the tyre. One of the sizes is the standardised size in millimetres which is more precise, e.g. the number sequence 25-622 means that the tyre is 25-28 mm wide when fully inflated and has an inner tyre diameter of 622 millimetres. The other size is indicated in inches (e.g. 28 x 1.35 or 700 x 35C) **(a)**.

Tyres must be inflated to the proper inflation pressure **(b)** to provide an optimal compromise between smooth running and riding comfort. Properly inflated tyres are also more resistant to punctures. An insufficiently inflated tyre can easily get pinched ("snakebite") when it goes over a sharp kerb.

The air pressure recommended by the manufacturer is given on the tyre side **(c)** or on the type label. The lower of the two pressure specifications makes for better cushioning for lightweight riders and is therefore best for cycling on a rough surface.

Rolling resistance on level ground decreases with growing pressure, but so does comfort. Highly inflated tyres are therefore most suitable for heavy riders and for riding on tarred roads **(d)**. Therefore, adjust the pressure to your weight and your riding habits.

Inflation pressure is often given in the old system of units, i.e. in psi (pounds per square inch). The table **(e)** gives the most common pressure values in terms of both systems.



Clincher and folding tyres and rim alone are not able to hold the air. Therefore, an inner tube has to be placed inside the tyre **(f)** to retain the air pressure.

Rims of **clincher and folding tyres** require in general a high-value rim tape over the complete width of the rim base. This rim tape protects the inner tube from the braking heat which could make the tyre burst.

In the case of **tubular tyres** that must be glued on the rim the tube is already integrated into the tyre and can be neither removed, nor patched in the case of a puncture. This type of tyre requires special rims without rim flanges.

If necessary, read the respective manuals before working on such kind of tyres.

Tubeless tyres can only be used in combination with specifically designed wheels. Pay attention to the manufacturer's type designations (e.g. "2way-fit"/"tubeless ready").

With reduced pressure tubeless tyres can be used as clincher tyres. The appropriate pressure for 75-kg / 165-lbs-cyclists is usually 7 bar and for 65-kg / 143-lbs-cyclists 6 bar. Make sure the pressure is not below 4.5 bar. Observe the marking on the tyre sides regarding the maximum pressure.

WARNING

Replace tyres with a worn tread or with brittle or frayed sides. Dampness and dirt penetrating the tyre can cause damage to its inner structure. The tube might burst. Risk of falling!

If you mount a new tyre with another size than the standard tyre mounted, it might be possible that the clearance between the front of your shoe and the wheel will be reduced when you ride at reduced speed. Also observe the space between fork and frame. Risk of accident!



e			
psi	bar	psi	bar
80	5.5	115	7.9
85	5.9	120	8.3
90	6.2	125	8.6
95	6.6	130	9.0
100	6.9	135	9.3
105	7.2	140	9.7
110	7.6	145	10.0



⚠ WARNING

- If you mount wheels with carbon rims on your SCOTT road bike, you must most probably change the brake pads, as conventional brake pads often do not provide the desired braking effect. It is essential to also observe the manuals of the wheel manufacturer.
- Treat your tyres with care. Always ride your bicycle with the prescribed tyre pressure and check the pressure at regular intervals, at least once a week. Riding with too low or too high air pressure may make the tyre come off the rim or burst.
- Clincher and folding tyres allowing an inflation pressure of five bars or more have to be mounted on hook bead rims, identifiable by the designation “C”.

SAFETY INSTRUCTIONS

- Observe the maximum pressure value of the rim. The pressure is dependent on the tyre width. You can find the values in the manuals of the rim or wheel manufacturer.

VALVES

There is only one valve type in general use on SCOTT road bikes: The **Sclaverand** or **Presta valve** that is designed to withstand extremely high pressures **(a)**. It has a plastic cap protecting the valve from dirt.

You first have to undo the small knurled nut a little and depress it carefully until air starts to escape **(b)**. Check the nut is tightened and seated in its stem, otherwise air may slowly leak out. It can be hard to inflate tyres to the necessary pressure by using hand pumps. It is much easier with a foot-operated or a track pump equipped with a pressure gauge **(c)**.



RIM TRUENESS AND SPOKE TENSION

For the true running of the wheel it is imperative that the tension exerted by the spokes is distributed evenly around the rim **(d)**. If the tension of a single spoke changes, e.g. as a result of riding fast over a kerb or of a loose nipple, the tensile forces acting on the rim become unbalanced and the wheel will no longer run true. The functioning of the SCOTT bike may even be impaired before you notice the wobbling appearance of a wheel that has gone out of true.

With rim brakes the sides of the rims also serve as braking surfaces **(e)**. An untrue wheel can impair your braking effect. It is therefore advisable to check the wheels for trueness from time to time. For this purpose lift the wheel off the ground and spin it with your hand. Watch the gap between the rim and the brake pads. If the gap varies by one millimetre or more, you should ask your SCOTT dealer to true up the wheel.

⚠ WARNING

Do not ride with untrue wheels. In the case of extreme side-to-side wobbles, the brake pads of rim brakes can miss the rim and get caught in the spokes! This normally instantly jams the wheel and throws you off your bicycle.

Loose spokes must be tightened at once. Otherwise the load on the other spokes and the rim will increase.

NOTICE

Truing (retruing) wheels is a difficult job which you should definitely leave to your SCOTT dealer **(f).**

CARBON WHEELS

As carbon wheels are made of carbon fibre reinforced plastic they come with particular aerodynamic properties and low weight.

In case you want to mount carbon wheels, ask your SCOTT dealer for advice.



⚠ WARNING

- The maximum permissible overall weight of 120 kg / 264 lbs including rider, luggage (rucksack) and SCOTT road bike must not be exceeded. Trailer towing is not permitted in general. Also observe the manuals of the wheel manufacturer. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.
- Check the condition of the brakes and make sure you only ride with brake pads that are suitable for carbon rims!
- Observe the maximum permissible overall weight restrictions in the case of carbon wheels. For more information see the manuals of the wheel manufacturer. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.
- The wheels are exclusively for use in road races **(a)** and triathlon sports. The wheels are not suitable for riding on unpaved roads, off-road and for jumps etc. In addition, they are not suitable for towing a trailer **(b)** and for riding with heavy luggage.

Particularities of braking with carbon wheels

As the braking surfaces are made of carbon **(c)**, there are some things to keep in mind. Only use the brake pads of wheel manufacturers **(d)** that are suitable for carbon wheels, as they are designed to suit such types of rims.

Carbon brake pads usually wear down faster than conventional brake pads. Keep in mind that the braking response of the rims needs getting used to, in particular in wet conditions. Therefore, test your brakes in a place free of traffic until you have full control of your bike.

The brake surfaces of the carbon rims **(e)** are sensitive to heat. Therefore, when you are riding in the mountains, avoid any drag braking. Riding downhill e.g. with a permanently activated rear wheel brake might lead to a heating up of the material and thus to a deformation.



The rim may sustain damage and the inner tube may burst, thus causing an accident. Always use both brakes simultaneously and release them intermittently to allow the material to cool off. If you are in doubt, stop and let them cool down.

⚠ WARNING

- Check the condition of the brake pads at short intervals, as they might wear down faster than with aluminium rims.
- Please note that wet weather reduces the braking effect considerably. Do not go for a ride, when it is about to rain or in wet conditions. Nevertheless, if you find yourself with your road bike on a wet or moist road, ride particularly carefully and at clearly reduced speed.
- Carbon rims are sensitive to heat. The glue of the tubular tyre can loosen or the tube of a clincher or folding tyre can bust. Always use both brakes simultaneously and release them intermittently to allow the material to cool off. If you are in doubt, stop and let them cool down.

REPAIRING TYRE PUNCTURES

Punctures during cycling are the most common cause for flat tyres. However, as long as you have the necessary tools and a spare tube or a repair kit, this need not mean the end of your cycle ride. If your wheels are attached with quick-releases to the frame and the fork, you only need two tyre levers and a pump (f).

SAFETY INSTRUCTIONS

- Before removing a wheel, read the chapters “Remounting the wheel” and “Using quick-releases and thru axles”. If you are in doubt or if you have any questions, contact your SCOTT dealer.



REMOVING THE WHEEL

If you have typical road bike rim brakes, open the quick-release lever at the brake (**Shimano, SRAM**) (a) or shift the pin in the brake lever/shifter unit on the handlebars (**Campagnolo**) (b).

If your bicycle has **cantilever and V-brakes** you first have to unhook the brake cable from the brake arm. To do this, grip the rim with one hand and press the brake pads and/or arms together. In this position the usually barrel shaped nipple of the lateral brake cable or the brake hose (of V-brakes) can easily be disengaged.

If you have **disc brakes** (hydraulic or mechanic), check the position of the brake pads through the inspection window. In this way you will be able to tell after the removal whether the brake pads are still in their correct position. Read the brake manufacturer's manual.

If you have derailleur gears, you should shift the chain to the smallest sprocket before removing the rear wheel. This shifts the rear derailleur right to the outside where it does not interfere with the removal of the wheel. Open the quick-release of the wheel, as described in the chapter "Using quick-releases and thru axles".

If you cannot remove the wheel after releasing the nuts, this is due to the drop-out safety tabs. They are metal catches which engage with recesses in the drop-outs. Just release the quick-release adjusting nut a little and slip the wheel past the tabs.


You will find it easier to remove the rear wheel, when you pull the rear derailleur slightly backwards (c). Lift your SCOTT road bike a little off the ground and give the wheel a light blow with your hand so that it drops out.

WARNING

If you purchased a SCOTT bike with hydraulic disc brakes, never turn your SCOTT bike upside down for repair work, i.e. with the handlebars and saddle underneath, otherwise the brake can fail.

CAUTION

Rotors can become hot, so let them cool down before removing a wheel.



NOTICE

Do not pull the (disc) brake lever with a removed wheel and make sure to mount the safety locks when removing the wheel for a longer period of time.

SAFETY INSTRUCTIONS

Observe the manuals of the brake and gear manufacturers. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

CLINCHER AND FOLDING TYRES

Tyre removal

Remove the cap and the fastening nut off the valve and deflate the tyre completely. Press the tyre from the sides towards the centre of the rim around its entire circumference. This will ease the removal.

Apply a plastic tyre lever to one bead of the tyre about 5 cm beside the valve **(d)** and lever the tyre out of the rim in this area. Hold the tyre lever tight in its position. Slip the second tyre lever between rim and tyre at a distance of about ten centimetres on the other side of the valve and lever the next portion of the bead over the edge of the rim **(e)**.

After levering a part of the tyre bead over the edge of the rim you should normally be able to slip off the whole tyre on one side by moving the tyre lever around the whole circumference. Now you can remove the inner tube **(f)**. Make sure the valve does not get caught in the rim, as this can damage the inner tube. If necessary you can remove the whole tyre by pulling the other tyre bead off the rim.

Repair the puncture according to the manuals of the repair kit manufacturer or replace the inner tube by a new one.

When you have removed the tyre, you should also check the rim tape. It should lie squarely in the rim trough, covering all spoke nipples, and should neither be damaged nor brittle.



In the case of double wall rims the tape must cover the entire rim base, but it should not be so broad as to stand up along the inside edges of the rim trough. Rim tapes for this type of rim should only be made of fabric or durable plastic. If you are in doubt or if you have any questions, contact your SCOTT dealer.

! WARNING

- If the fabric of the tyre is destroyed by the perforating object, replace the tyre to be on the safe side.
- Replace spoilt rim tapes immediately.

NOTICE

■ If you get a puncture en route, inflate the inner tube and bring it close to your ear. In most cases you can hear the air coming out. At home you can help yourself with a bucket of water where you can locate the hole by the bubbles. When you have found the hole, look for the corresponding place on the tyre and check it, as well. Often, you will find a foreign body sticking in the tyre, which ought to be removed. Otherwise another puncture can occur.

Tyre mounting

When mounting a tyre make sure no foreign matter, such as dirt or sand, gets inside the tyre and you do not damage the inner tube in the process.

Slip one bead of the tyre onto the rim. Using your thumbs, press one bead over the edge of the rim and then around the entire circumference. This should normally be possible without using tools.

Stick the valve of the tube through the hole in the rim **(a)**. Inflate the inner tube slightly so that it becomes round and push it into the tyre all the way round. Make sure not to leave any folds in the inner tube.

To finish mounting the tyre, start at the opposite side of the valve. Using your thumbs, press as much of the second bead of the tyre over the edge of the rim as you can **(b)**.



Make sure the inner tube does not get pinched and squashed between the tyre and the rim. You can prevent this by pushing the inner tube into the hollow of the tyre **(c)** with a finger as you work along.

Work the tyre into the rim by approaching the valve symmetrically from both sides. Towards the end, you will have to pull the tyre vigorously downwards **(d)** to make the already mounted portion of the tyre slip towards the deepest part of the rim well. This will ease the job noticeably on the last centimetres.

Before fitting the tyre completely on the rim check again whether the inner tube lies properly inside the tyre and press the last stretch of tyre over the edge of the rim using the balls of your thumbs.


If this does not work, you will have to use the tyre levers **(e)**. Make sure the bent ends point towards the inner tube and the inner tube does not get damaged.

Push the valve subsequently a little into the tyre so that the inner tube does not get caught between the rim and the tyre beads. Check whether the valve stands upright. If not, dismount one bead again and reposition the inner tube.

To make sure the inner tube does not get pinched between the rim and the bead, move the tyre sideways back and forth between the sides of the rim. While doing so, also check whether the rim tape has shifted.

Inflate the inner tube to the desired pressure. The maximum pressure is indicated on the side of the tyre.

Check whether the tyre is properly seated by inspecting the fine witness line **(f)** on the tyre just above the rim edge. This line should be even to the rim all around the tyre. If it is not, deflate the tyre a little and check again. Starting from the maximum tyre pressure you can now reduce the pressure through the valve to suit your needs. Please observe the recommended tyre pressure range.

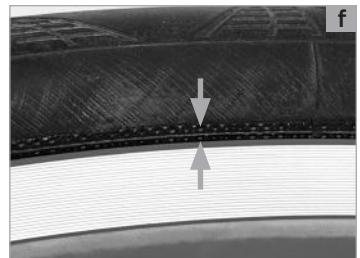

TUBELESS TYRES (UST TYRES)

Tubeless tyres **(a)** are also referred to as “tubeless ready”. The rims are provided with specific valves, have an entirely enclosed rim base and partly also a specific rim shape. There is no inner tube.

Tyre removal

Deflate the tubeless/UST tyre completely **(b)**. Press the tyre from one side towards the centre of the rim, until the tyre bead is loose in the rim base.

Start removing the tyre close to the valve and lift one tyre side over the edge of the rim with your fingers.

After you have pulled the entire tyre side over the rim edge press, if necessary, the other tyre side into the rim base and remove this side also from the rim.

NOTICE

Do not use tyre levers **(c)** in order to avoid damage to the sensitive sealing lip on the tyre bead!


It is recommended that you use the tools of the respective tyre manufacturer for removal as they are designed to be used together.

Puncture assistance - repair

In case of a puncture, tubeless tyres can also be used with inner tubes. Remove any available perforating object from the tyre first and remove the valve from the rim. Insert a slightly inflated new inner tube into the tyre. Mount the tyre as described in chapter “Clincher and Folding Tyres”. You may need tyre levers for this purpose.

WARNING

Improper mounting can lead to malfunctioning, tyre damage or even brake failure. Therefore, strictly observe the instructions of the component manufacturer.



NOTICE

There are also repair sprays available. You find more details on these sprays further below in this chapter.

SAFETY INSTRUCTIONS

There are specific patches available for tubeless tyres which are applied inside. If need be you can also use a conventional repair patch. Always observe the operating instructions of the repair kit manufacturer.

Tyre mounting

Before you start mounting make sure the inside of the tyre and the tyre bead are free of dirt and lubricant.

NOTICE

Do not use tyre levers to avoid damage. Press the tyre on the rim by exclusively using your hands to avoid damage to the tyre bead.

It is recommended that you use the tools of the respective tyre manufacturer for mounting as they are designed to be used together.

Insert the valve from the inside through the valve hole and slide the rubber seal as well as the plastic washer matching the shape of the rim on the valve stem. Screw on the valve nut with its flat side first until the valve fits reliably and is tight.

Observe whether the running direction of the tyre is indicated. Mounting tubeless tyres is like mounting clincher tyres. Start in the area opposite the valve and press the tyre into the rim base, as far as possible, without tool and by using your hands **(d)**. Work yourself around until you reach the valve **(e)**. Align the tyre equally.

Observe the position of the valve between the sides of the tyre. Apply some assembly liquid provided by the tyre manufacturer to the tyre bead and the inside of the rim edges **(f)**. This makes the tyre slide easier into its position. Press the tyre to the side so that you reach the bottom with the sponge.

Check the seat of the tyre at the valve once again. Press from above on the tyre and work yourself around; make sure the tyre is equally seated all around and in contact with the tyre base.



The first air blast is crucial for the mounting **(a)**. The tyre must inflate and be in contact with the rim immediately to make sure no air escapes. It is therefore recommended that you use a compressor or a powerful track pump. Inflate the tyre with quick blasts.

Once there is contact and the tyre is seated tightly continue inflating until you hear two pops. This noise indicates that the tyre is correctly seated. If there had been no popping noise when you have reached the maximum tyre pressure deflate the tyre and carefully apply mounting liquid once again.

Once the tyre is seated check along the witness line **(b)** whether the tyre is seated equally around the entire circumference on both sides of the rim. Spin the wheel slowly and observe the course of the witness line along the top edge of the rim. If necessary, deflate the tyre a little and align it.

When everything fits deflate the tyre and unscrew the valve from the valve stem. Shake the latex milk bottle strongly so that the ingredients mix up evenly. Fill about 30 ml of the sealant approved by the tyre manufacturer into the tyre **(c)**.

Clean the area inside and outside the valve by using an absorbent cloth. Screw in the valve again. Inflate the tyre as described above. Spin the wheel slowly for a few rotations to make sure the liquid spreads inside the tyre.

Grasp the wheel with both hands, continue turning it gradually and shake or tilt it in both directions. This will spread the sealant inside reliably in all areas.

Finish by adjusting the air pressure to your needs or weight and the tyre width. Do not exceed the permissible maximum pressure. Tubeless tyres can be used with about half a bar to one bar less than clincher or folding tyres.

WARNING

Tubeless tyres have to be mounted together with a UST rim/UST wheel or a tubeless ready rim.

CAUTION

Tubeless tyres are often also tight without latex milk, but the latex milk significantly increases the puncture protection and should therefore be applied.



SAFETY INSTRUCTIONS

It is not only possible to ride with UST/tubeless tyres, but also with typical folding tyres without inner tube and filled with latex milk, if necessary. Read and observe the instructions of the supplier.

Useful information about tubeless tyres

⚠ CAUTION

The valve nut of tubeless tyres must be checked regularly for a tight seat (d). With a loose valve air will quickly escape from the tyre.

When mounting tubeless tyres the tyre bead and the rim edges must be moistened with a special solution on both sides (e). Normally you can also use detergent diluted with water. This is the only way to make the tyre slip into its bed and become air tight.

NOTICE

You can also inflate the tyre with the repair spray actually designed for a repair during the ride. The spray provides an integrated puncture protection. To do so slide the spray head on the valve. Align the bottle in a way that the opening of the head is flush with the valve. Keep the top of the head tight with one finger and press the bottle for about two minutes against the head. Pull the bottle from the valve with a jerk. Then set off on your bike for a few miles to make the latex milk spread inside the tyre.

In case of a puncture in your tubeless tyre you can repair the tyre inside as you would usually repair an inner tube. If you have filled latex milk inside beforehand the milk must be removed thoroughly in the area of the puncture, otherwise the patch will not stick. Inflate the tyre with the spray subsequently (f). Minor damage can also be repaired by only using the spray.

SAFETY INSTRUCTIONS

Inflating with a cycle or track pump is difficult. The sudden pressure increase which is necessary to make the tyre slip neatly and tightly into the rim seat can typically only be achieved with an electric compressor. The tight seat is indicated by one clearly audible pop per tyre side.



REMountING THE WHEEL

Mounting the wheel is done in the reverse order of dismounting. If necessary, insert the brake discs between the brake pads. Make sure the wheel is correctly seated in the drop-outs and accurately centred between the fork legs or the seat and chainstays. Make sure the quick-release and the drop-out safety tabs are correctly seated. For more information see the chapter “Using quick-releases and thru axles”.


Close the quick-release lever at the brake (**Shimano, SRAM**) (a) or shift the pin in the brake lever/shifter unit on the handlebars (**Campagnolo**) (b).

If you have **disc brakes** (c), check before mounting the wheel whether the brake pads rest snugly in their seats in the brake calliper body. The gaps between the brake pads and the wheel should be parallel and the wear indicators in their correct position. Make sure you guide the rotor carefully between the brake pads. After mounting the wheel and tightening the quick-release pull the brake lever (several times, if you have disc brakes).

All brakes:

After mounting the wheel and tightening the quick-release pull the brake lever (d) (several times, if you have disc brakes).

Lift your SCOTT bike off the ground and spin the wheel with your hand. With the wheel spinning the rotor should not drag along the brake calliper or the brake pads and the rim should keep off the (rim) brake pads.



⚠ WARNING

If you have rim brakes, make sure you hook up the brake cable immediately after the wheel mounting!

Before setting off again check that the brake surfaces and/or rotors are still free of grease or other lubricants after the wheel mounting (e).

Check whether the brake pads hit the rotors or brake surfaces of the rims. Make sure the wheel is properly seated and firmly fixed in the drop-outs. Always do a brake test as described in the chapter “Tests before every ride”.



TESTS AFTER AN ACCIDENT

1. Check whether the wheels are still firmly fixed in the drop-outs **(a)** and whether the rims are still centred with respect to the frame or fork. Spin the wheels and observe the gap either between brake pads and rim sides **(b)** or between frame and tyre. If you have rim brakes and the width of the gap changes markedly and you have no way to true the rim where you are, you need to open the brakes a little with the special device so that the rim can run between the brake pads without touching them. Please note that in this case the brakes may not act as powerfully as you are used to.

No matter whether you have rim or disc brakes, have the wheels trued by your SCOTT dealer immediately after you are back home.

For more information see the chapters “Brakes”, “Using quick-releases and thru axles” and “Wheels and tyres” and the manuals of the component manufacturers.

2. Check that handlebars and stem are neither twisted nor bent or broken and that they are level and aligned. Make sure the stem is firmly fixed on the fork by trying to turn the handlebars relative to the front wheel **(c)**. Briefly lean on the brake levers to make sure the handlebars are firmly fixed in the stem.

Realign the components, if necessary, and gently tighten the bolts to ensure a reliable clamping of the components **(d)**. The maximum torque values are printed directly on the components or specified in the manuals of the component manufacturers.

For more information see the chapters “Adjusting the SCOTT bike to the rider” and “The headset on the SCOTT bike” and the manuals of the component manufacturers.

3. Check whether the chain still runs on the chainrings and the sprockets. If your SCOTT bike fell over to the chain side, verify the proper functioning of the gears. Ask somebody to lift your SCOTT bike by the saddle and carefully shift through all the gears.



Pay particular attention when switching to the small gears, making sure the rear derailleur does not get too close to the spokes as the chain climbs onto the larger sprockets **(e)**.

If the rear derailleur or the drop-outs/derailleur hanger is bent, the rear derailleur may collide with the spokes. This in turn can destroy the rear derailleur, the rear wheel or the frame. Check the function of the front derailleur, as a displaced front derailleur can throw off the chain, thus interrupting the drive of your SCOTT bike. Risk of falling!

For more information see the chapter “Gears” and the manuals of the component manufacturers.

4. Make sure the saddle is not out of alignment **(f)** using the top tube or the bottom bracket shell as a reference. If necessary, open the clamping, realign the saddle and retighten the clamping.

For more information see the chapters “Adjusting the SCOTT bike to the rider” and “Using quick-releases and thru axles” and the manuals of the component manufacturers.

5. Let your SCOTT bike bounce on the ground from a small height. If there is any rattling, check where it comes from. Check the bearings and bolted connections, if necessary. Tighten them slightly, if necessary.
6. Finally, take a good look at the whole SCOTT bike to detect any deformations, colour changes or cracks.

⚠ WARNING

Ride back very carefully by taking the shortest route possible, even if your SCOTT bike went through this check without any problems. Do not accelerate or brake hard and do not ride your bike out of the saddle. If you are in doubt about the performance of your SCOTT bike, have yourself picked up by car instead of taking any risk.

Back home you need to check your SCOTT bike thoroughly. Damaged parts must be repaired or replaced. Ask your SCOTT dealer for advice. For more information on carbon components see the chapter “Carbon – a particular material” and the manuals of the component manufacturers.



⚠ WARNING



- Deformed components, especially components made of aluminium, can break without previous warning. They must not be repaired, i.e. straightened, as this will not reduce the imminent risk of breakage. This applies in particular to the fork, the handlebars, the stem, the cranks, the seat post and the pedals. When in doubt, it is always the better choice for your safety to have these parts replaced. Ask your SCOTT dealer for advice.
- If your SCOTT bike is assembled with carbon components, it is imperative that you have it checked by your SCOTT dealer after an accident or similar incident. Carbon is extremely strong and durable with very low weight, making it perfect for the production of high-performance parts. However, one of the inherent properties of carbon is that possible overstress may compromise the inner carbon fibre structure without showing any visible deformation, as is the case with steel or aluminium. A damaged component can fail without previous warning. Risk of falling!
- Make it a rule to check the functioning and in particular the limit stop of the rear derailleur after a fall or if your SCOTT bike has toppled over.

CARBON – A PARTICULAR MATERIAL

Special characteristics of components made of carbon-fibre reinforced plastics, also referred to as carbon or CRP, need to be taken into account. Carbon **(a)** is an extremely strong material which combines high resistance with low weight.

After overstress, however, carbon components **(b)**, unlike metal parts, do not necessarily show durable or visible deformation even though some of the fibres may be damaged. It is very dangerous to continue using the carbon component after an impact or undue stress, as it may fail without previous warning thereby causing an accident with unforeseeable consequences.

For this reason we recommend that you have the component, or to be certain, the entire SCOTT bike **(c)** checked by your SCOTT dealer after every incident, such as e.g. a fall.



Damaged components must be replaced at once! Prevent further use by taking appropriate measures, i.e. saw the component into pieces. Damaged carbon frames can possibly be repaired. Contact your SCOTT dealer.

Carbon components must not be exposed to excessive heat. Therefore, never have a carbon component enamelled or powder-coated. The temperatures required for enamelling or powder-coating could destroy the component. Do not leave carbon fibre components near a source of heat or in your car during hot or sunny weather.

In addition, carbon is sensitive to pressure. Therefore, do not mount your SCOTT frame on a mounting carrier with inappropriate clamps **(d)**.

Carbon components have, like all lightweight bike components, a limited service life. For this reason, have the stem and the handlebars checked at regular intervals (e.g. every three years), even if they have not experienced any undue stress, such as an accident.

When you intend to transport your SCOTT bike in the boot of your car, be sure to protect the bike or the carbon frame and components. Blankets **(e)**, foam tubes or the like are a suitable padding to protect the sensitive material from damage. Do not place any bags on your SCOTT bike lying in your car.

Always park your SCOTT bike carefully **(f)** and make sure it does not topple over. Carbon frames and components may already sustain damage by simply toppling over and thereby hitting e.g. a sharp edge.

⚠ WARNING

If carbon components on your SCOTT bike produce any creaking or cracking noises or show any external sign of damage, such as gouges, cracks, dents, discolorations etc., do not use the SCOTT bike any longer. Contact your SCOTT dealer immediately; he will check the component thoroughly.



⚠ WARNING

- Do not combine carbon handlebars with bar ends, unless they have been specifically approved. Do not shorten carbon handlebars or clamp the brake levers and shifters more in the middle than indicated or needed. Risk of breakage!
- Make sure all carbon clamping areas are absolutely free of grease and other lubricants! Grease will penetrate the surface of the carbon material, thereby reducing the coefficient of friction. This will no longer provide reliable clamping within the prescribed torque values. Once greased, carbon components may never again ensure reliable clamping! Use a special carbon assembly paste (a) instead as offered by various manufacturers.
- Most clamps of bike carrier systems are potential sources of damage to large-diameter frame tubes! As a result thereof carbon frames can fail during use without previous warning. However, there are special-purpose models which are suitable, available in the car accessory trade. Inform yourself there or ask your SCOTT dealer for advice.

NOTICE

- Do not clamp a carbon frame or seat post in the holding jaws of a workstand (b)! The components may sustain damage. Mount a sturdy (aluminium) seat post instead and use it to clamp the frame, or choose a work stand that holds the frame at three points inside the frame triangle or which clamps the fork and bottom bracket shell.
- Protect the exposed areas of your carbon frame (e.g. the head tube and the underside of the down tube) against rubbing cables or stone chips with special pads (c+d) your SCOTT dealer keeps for sale.
- Carbon fibre components are particularly vulnerable to damage caused by excessive clamping force. Carbon assembly paste creates extra friction between two surfaces, allowing the necessary torque value to be reduced by up to 30 %. This is especially useful in the clamping areas of handlebars and stem, steerer tube and stem as well as seat post, i.e. three areas where too much clamping force can damage either component, causing component failure or voiding the warranty. By reducing the clamping force, carbon assembly paste relieves stress on sensitive carbon surfaces, preventing damage to fibres or the cracking of the carbon substructure.



THE HEADSET ON THE SCOTT BIKE


The headset (**e**) connects the fork to the frame, but allows it to move freely. It must turn with virtually no resistance, if the SCOTT bike is to run straight, stabilising itself as it travels. Shocks caused by uneven road surfaces expose the headset to considerable levels of stress. In this way it can become loose and go out of correct adjustment.

WARNING

Riding the bicycle with a loose headset increases the stress on fork and bearings. This can lead to damage to the fork. Risk of falling!

Checking and readjusting

Check the headset for play by placing your fingers around the upper head tube race. Bring your weight to bear on the saddle, pull the front brakes with your other hand and push the SCOTT bike firmly back and forth with the wheel remaining on the ground (**f**). If the bearing has play, you will feel the upper head tube race moving in jerks relative to the lower head tube race – visible as a small gap in between the head tube races.



To check whether the headset runs smoothly, lift the frame up until the front wheel no longer touches the ground. The handlebars should turn from far left to far right without feeling roughness or tightness at any point. With a gentle tap on the handlebars the fork should turn easily from the middle position **(a)**.

If you face any problems during the test, contact your SCOTT dealer.

SAFETY INSTRUCTIONS

Adjusting the headset requires a certain amount of experience and should therefore be left to your SCOTT dealer.

THREADLESS HEADSET - AHEADSET®

The distinct feature of this system is that the stem does not sit within the fork steerer tube, but rather slips over the fork steerer tube, which in this case is threadless. The stem is thus an important part of the headset, as the stem clamping fixes the adjustment. You generally only need one or two Allen keys and a torque wrench to adjust an Aheadset®.

Release the clamping bolt(s) located on the side of the stem by one to two turns **(b)**. Gently tighten the countersunk adjusting bolt on top a little, e.g. by a quarter turn **(c)**, using an Allen key.

Realign the stem to ensure that the handlebars are at right angle to the wheel. Make sure the front wheel is in line with the top tube and the stem. Tighten the clamping bolts of the stem. Use a torque wrench and never exceed the maximum torque values! You will find the prescribed values in the chapter "Recommended torque settings for your SCOTT bike", directly on the components and/or in the manuals of the component manufacturers.

Check the headset for play as described above **(d)**. Do not overtighten the headset. Risk of headset failure!



⚠ WARNING

Bear in mind that by overtightening the bolts the stem can crush the steerer tube. In particular forks with carbon steerer tubes are highly sensitive to overtightening the steerer tube clamping at the stem. Risk of breakage! Make sure the clamping area is absolutely free of grease when any of the clamping faces is made of carbon. If necessary, use carbon assembly paste in the clamping areas to ensure maximum clamping.

Check the secure seat of the stem by taking the front wheel between your legs and trying to turn the handlebars and stem relative to the wheel (e). A loose stem can cause an accident.

Never change the preloading mechanism in the inside of the fork steerer tube. Never install a star nut in carbon fork steerer tubes.

NOTICE

Do not overtighten the upper bolt, it only serves to adjust the headset play.

SAFETY INSTRUCTIONS

If you do not succeed in adjusting the headset, this can have several reasons. If you are not absolutely sure, ask your SCOTT dealer for help.

LIGHTING OF YOUR SCOTT BIKE

For riding on public roads a functioning lighting set (f) is obligatory (see the chapter “Legal requirements for riding on public roads”).



BATTERY-OPERATED LIGHTING

The regulations on the use of battery or rechargeable battery-operated front lamps **(a)** and rear lights are different in each country. Familiarize yourself with the relevant country-specific regulations and comply with the road traffic regulations in your country.

Ask your SCOTT dealer for suitable battery-operated or rechargeable battery-operated lightings.

For more information see the chapter “Legal requirements for riding on public roads”.

USEFUL FACTS ABOUT THE SCOTT BIKE

HELMETS AND GLASSES

Cycling helmets are a must when riding a bicycle. Your SCOTT dealer has a variety of styles and sizes.

Make sure the helmet complies with the test standard EN 1078 or the like (depending on the country where you use it). Cycling helmets are only approved for use during cycling. Observe the manufacturer’s instructions.

WARNING

Never ride without a helmet and glasses (b+c)! But remember that even the safest helmet is useless unless it fits properly and is correctly adjusted and fastened.

In addition to a cycling helmet and suitable clothing, cycling glasses are absolutely essential when you are riding your SCOTT road bike. They do not only protect your eyes from the sun and the wind, but also keep out flies and other impurities that may impede your vision when they fly into your eyes. Being temporarily without sight may result in an accident or fall!



Good cycling glasses should fit tight on your face not allowing any wind to affect your eyes **(d)**. Cycling glasses come in a wide range of models, such as glasses with clear lenses and without UV protection for cycling in the dawn and at night or glasses with maximum UV protection for cycling under extreme sunlight.

Your SCOTT dealer has a wide range of cycling glasses available and will be pleased to advise you.

CLOTHING

Cycling trousers **(e)** are essential if you want to sit comfortably. These close-fitting trousers, at least at the inside, have special padding in the seat. They have no seams that can press into you and they do not form folds. Cycling trousers are therefore designed to be worn next to the skin.

Since sporty cycling will soon bring you out in a sweat, a jersey **(f)** made of synthetic materials is ideal. The fibres themselves do not take up any moisture but instead wick the sweat away from the skin up to the surface of the materials and thus prevent you getting cold from the cool wind produced by your speed. On longer tours you should in addition have suitable protection against the rain. Your SCOTT dealer will be glad to help you choose the right equipment.

WARNING

Never ride with wide-cut trousers or skirts that might get caught in the spokes, chain or chainrings. To avoid any such mishap, use suitable clips or straps, if necessary.

For increased visibility to other road users be sure to wear striking and bright-coloured clothing!



PEDALS AND SHOES

Cycling shoes should be made of solid material to provide firm support for your feet. In addition, they should have a stiff sole so that the pedal cannot press through **(a)**. The sole should not be too wide in the area of the heels, as the rear stays or the crank will otherwise get in the way of your pedalling. This will prevent your feet from assuming a natural position when pedalling and may cause knee pain in the long run. Your SCOTT dealer has a wide range of shoes available and will be pleased to advise you.

Special cycling shoes are obligatory, if your SCOTT road bike is equipped with clipless pedals **(b+c)**. With these shoes cleats are fixed to the sole. They give you a firm connection between shoe and pedal and allow depending on the model an at least acceptable walking position.

The main advantage is that these step-in pedals prevent your feet from slipping off when pedalling fast. They enable you not only to push but also to pull the pedals. This makes your pedalling more smooth and increases the power transmission compared to normal pedals.

The usual way to engage with the pedal is to turn it from the lowest position of the crank to the horizontal using the tip of the cleat and push down on the back of it. Normally, the shoe engages with the pedal with a click which you will hear and feel clearly.

The release force of clipless pedals is adjusted by means of an Allen key **(d)**. At the beginning the setting should allow an easy release. Once you have more practice, you can tighten the setting.

If there are any creaking or squeaking noises, some grease will solve the problem in most cases. These noises as well as lateral play of the shoe on the pedal can, however, also be signs of wear. Check the cleats at regular intervals.

WARNING

Make sure the fastening bolts of the cleats are properly tightened, as you will find it almost impossible to disengage your shoe from the pedal if the cleat is loose. Risk of falling!



⚠ WARNING

- Taking up the pedals, engaging and disengaging the shoes should first be practised when stationary. Later on you can refine your technique in a place clear of traffic.
- Only use clipless pedals allowing you to engage and disengage smoothly. A defective pedal or a badly worn cleat can make the shoe disengage from the pedal (e). Or unclipping the shoe from the pedal is sometimes very difficult or even impossible. In both cases there is the danger of a fall!
- Make sure pedals and shoe soles are always clear of mud and other impurities (f) and grease the lock-in mechanism with lubricant at regular intervals.
- Most cycling shoes with cleats are only suitable for walking to a limited extent. As the cleats, in particular when mounted to road bike shoes, are thicker than the sole, they provide less grip even on a non-slip ground. Be particularly careful.

SAFETY INSTRUCTIONS

- Ask your SCOTT dealer for advice about the different shoe and pedal models. Cycling shoes come in various styles for specific uses.
- Read the manual of the pedal manufacturer. For additional information on your bicycle and the web links for the component manufacturers, please visit the manual pages of the bike brand you have purchased via your Quick Start Manual.

ACCESSORIES

In purchasing this SCOTT bike you laid the foundation for many years and miles of enjoyable cycling. Whatever you are planning to do with your SCOTT bike, be sure to have proper equipment and to keep a few tips in mind. Your SCOTT dealer has a variety of useful accessories on offer enhancing both your safety and convenience.

Your SCOTT bike can be fitted with various kinds of accessories. Make sure to observe the requirements according to the traffic regulations in your country and of the ISO/EN standards. Any retrofitted part must be compatible with your SCOTT bike. If you are in doubt or if you have any questions, contact your SCOTT dealer.



⚠ WARNING

- Unsuitable accessories may change the qualities of your SCOTT bike and even cause an accident. Therefore, before fitting any accessories contact your SCOTT dealer and observe the instructions regarding the intended use of your SCOTT bike.
- Retrofitted accessories, such as mudguards, pannier racks etc. can impair the functioning of your SCOTT bike. Ask your SCOTT dealer for advice before mounting any kind of accessories to your bike.

SAFETY INSTRUCTIONS

- Before buying any additional bells or lighting accessories, inform yourself thoroughly whether they are permitted and tested and accordingly approved for use on public roads **(a)**. Make sure additional battery/accumulator-powered lamps are marked with the wavy line and the letter “K”.

Bicycle locks

Do not forget to take a high quality D- **(b)** or chain lock with you on your ride. The only way to effectively protect your SCOTT bike against theft is to lock it to an immovable object.

Puncture kit

The most important accessories for a successful cycle tour are a tyre pump and a small tool kit. The tool kit should include two plastic tyre levers, the most commonly used Allen keys, a spare tube, a tyre repair kit and a little cash **(c)**. In this way you will be well prepared in the event of a puncture or some other mishap. Take your mobile phone with you, as well.

Cycle computers

There are electronic computers that show your current and average speed, your daily and annual mileage as well as the duration of the present ride **(d)**. Top-end models show the highest speed that was reached, the difference in height, the cadence or (with a special chest strap) your pulse rate as well.

Today, there are global positioning systems (GPS) and specific power meters for optimal training on the market which are compatible with your SCOTT bike.



Aero or triathlon/time trial bars

Before you mount aero or triathlon/time trial bars **(e)** on your SCOTT road bike, it is essential to find out first whether the handlebars or a corresponding attachment for use with your handlebars and stem are approved.

SAFETY INSTRUCTIONS

Read the manuals of the handlebar and stem manufacturers. If you are in doubt or if you have any questions, contact your SCOTT dealer!

Mudguards (wheel protections)

If you want to mount mudguards on your SCOTT bike, ask your SCOTT dealer for advice. There are removable mudguards **(f)**, also referred to as clip-on mudguards, as well as firmly attached models that provide more protection against moisture and dirt.

Retrofittable mudguards for fix fastening are usually made of plastics and are secured in the correct position by means of additional stays. The length of the stay is perfect when the bottom edge of the mudguard runs at an approx. distance of 15 mm parallel to the tyre. Also make sure neither the brakes nor the steering are affected.

For safety reasons the front wheel stays must have security fastenings. They prevent the tyre from being blocked by impurities taken up by the front wheel from the ground. In this case the security fastening frees the stay and hereby prevents a possible accident. The plug connection can easily be refastened.

WARNING

Damaged mudguards should be replaced in any case. Risk of accident!



TRANSPORTING LUGGAGE

There are only theoretically various ways of carrying luggage on your SCOTT road bike. Using a bicycle rucksack **(a)** is a convenient way of transporting luggage on a bike and therefore recommendable.

Your choice will primarily depend on the weight and volume of the luggage and on the bicycle you want to use. Contact your SCOTT dealer.

⚠ WARNING

For SCOTT road and triathlon bikes as well as time trial machines and cyclo-cross bikes pannier racks **(b)** are not permitted. Note that SCOTT will not assume liability for the use of pannier racks. Such a use would render the warranty null and void.

TAKING CHILDREN WITH YOU

For SCOTT road and triathlon bikes as well as time trial machines and cyclo-cross bikes (kids) trailers **(c)**, child carriers **(d)** and kids' tandem bike systems are not permitted. Note that SCOTT will not assume liability for the use of trailers, child carriers and kids' tandem bike systems. Such a use would render the warranty null and void.

Contact your SCOTT dealer.

SAFETY INSTRUCTIONS

- Before towing a trailer with your SCOTT gravel or cyclocross bike read chapter “Notes on the transport of loads and on carrying children and/or pets with your SCOTT bike”.
- Before mounting a child carrier or pannier rack, check whether your SCOTT bike is permitted for child carriers or pannier racks. You will find the respective information in the chapter “Intended use of your SCOTT bike” or in the SCOTT handover report in the Quick Start Manual. Contact your SCOTT dealer.



TRANSPORT OF THE SCOTT BIKE

BY CAR

Nearly every car accessory dealer and car company offers carrier systems **(e)** that allow the transport of a bike without disassembly.

The usual design involves rails fixed to the roof of the car onto which the bicycles are fixed with clamps gripping the down or the top tubes. This can, however, result in irreparable damage to the frame. High-end, very thin-walled aluminium or carbon frames are particularly susceptible to such kind of damage. Due to the material properties of carbon, you may not see a severe damage at first sight. This can result in an unforeseeable severe accident at a later date. There are, however, special suitable models available in the car accessory trade.

Rear carriers are becoming more and more popular. Their big advantage over roof carriers is that you do not have to lift up the bicycle so high to attach it. Make sure the clamps do not cause any damage to the fork or frame. Risk of breakage!

Whatever system you opt for, make sure it complies with the relevant safety standards, e.g. DIN/EN standards of your country (GS symbol).

Read the manual of your bicycle carrier and comply with the maximum load capacity and recommended or prescribed driving speed. If applicable, comply with the required supporting load on the trailer hitch.

WARNING

Make sure to remove all parts of your SCOTT bike (tools, saddle bags **(f), tachometers etc.) which may come loose during transport. Risk of accident!**

Do not buy a carrier on which the SCOTT road bike has to be mounted upside down, i.e. with the handlebars and saddle fixed face down to the carrier. This way of fastening the bicycle exposes handlebars, stem, saddle and seat post to extreme stress during transport. Do not opt for a carrier system with crank arm fit. Risk of breakage!



⚠ WARNING

- Check whether your SCOTT bike is properly fastened before and at regular intervals during the journey, e.g. during a stop. A SCOTT bike that detaches from the roof carrier may endanger other road users.
- Always secure your SCOTT bike or its components when putting it/them into the interior of your car **(a)**. Parts shifting around can impair your safety.
- Please make sure the lights and the number plate of your car are not hidden from view. For some carriers, a second exterior rear view mirror is required by the road traffic regulations.

NOTICE

- Most clamps are a potential source of damage to large-diameter frame tubes **(b)** that are not designed to be fixed in such clamps! Do not use such systems with carbon frames.
- Bear in mind that your car has a greater overall height with the bicycle on it. Measure the overall height and place a sign stating the height somewhere in the cockpit or on the steering wheel so that it can be easily seen.
- If your SCOTT bike has disc brakes, be sure to mount the safety locks **(c)** before transporting your SCOTT cyclo-cross bike with the wheels dismantled.
- Pull the brake levers and secure them with a strong elastic strap **(d)** when transporting a SCOTT bike with hydraulic disc brakes.



BY TRAIN / BY PUBLIC TRANSPORT

In the cities the regulations for taking SCOTT bikes by public transport differ **(e)**. In some places there are for example off-times when you are not allowed to take your SCOTT bike with you or only with an additional bicycle ticket. Inform yourself in time about the regulations of carrying the bicycle before you start the trip!

The regulations for taking bicycles with you by train differ in each country. Inform yourself in time about the respective transport regulations.

SAFETY INSTRUCTIONS

Observe that every train traveller is normally allowed to take only one bicycle with him.

Before you start your trip inform yourself in time about the conditions of carriage and also observe the regulations and rules about bicycle transport in the countries through which you intend to travel.

BY PLANE

If you want to take your SCOTT bike with you when you go on a trip by plane, pack it in an appropriate bicycle suitcase **(f)** or in a bicycle cardboard box that you can obtain from your SCOTT dealer. Special bicycle bags often do not provide sufficient protection for your SCOTT bike.

Pack the wheels (in particular carbon wheels) in special wheel bags to protect them inside the suitcase or cardboard box. Do not forget to take the necessary tools, a torque wrench and bits, carbon assembly paste and this owner's manual with you to be able to assemble your SCOTT bike and to get it ready for use at your destination.

WARNING

Pull the brake levers and secure them with a strong rubber band.

NOTICE

If your SCOTT cyclo-cross bike has disc brakes, be sure to mount the safety locks before transporting your SCOTT cyclo-cross bike with the wheels dismounted.



GENERAL NOTES ON CARE AND SERVICING

MAINTENANCE AND SERVICING YOUR SCOTT BIKE

Your SCOTT dealer will have assembled and adjusted your SCOTT bike ready for use when you come to collect it. Nevertheless, your SCOTT bike needs regular servicing **(a)**. Have your local SCOTT dealer do the scheduled maintenance work. This is the only way to ensure that all components function safely and reliably for many kilometres.

The bike will be due for its first service after 100 to 300 kilometres, 5 to 15 hours of initial use or four to six weeks, at the latest however after three months. The bedding-in phase typically involves spokes slightly losing tension or gears coming out of adjustment **(b)**, so there is every reason to have your SCOTT dealer service the SCOTT bike at this stage. This bedding-in process is unavoidable. Therefore, remember to make an appointment with your SCOTT dealer to have your new SCOTT bike inspected. This first service is very important for both functioning and durability of your SCOTT bike.

It is advisable to have your SCOTT bike serviced regularly by your SCOTT dealer after the bedding-in phase, i.e. according to the SCOTT service and maintenance schedule. If you ride a great deal on poor road surfaces or off-road, it will require correspondingly shorter service periods (see SCOTT service plan in the Quick Start Manual). The off-season during the winter months is a very good time to take your SCOTT bike to your SCOTT dealer for the annual inspection, as they will have plenty of time for you and for servicing your SCOTT bike.

The intended use of your SCOTT bike includes regular servicing and the replacement of worn out parts in time, e.g. chains, brake pads **(c)** or bowden and brake cables **(d)**.



This will ensure the safe functioning and therefore has an influence on the liability for material defects and the warranty.

For more information see the chapter “SCOTT service and maintenance schedule” and the manuals of the component manufacturers.

⚠ WARNING

Servicing and repairs are jobs best left to your SCOTT dealer. If you have your bike serviced by anyone else than an expert, you run the risk that parts of your SCOTT bike will fail. Risk of accident! When working on your SCOTT bike restrict yourself to jobs for which you have the suitable tools, e.g. a torque wrench, and the necessary knowledge.

If a component needs to be replaced, make it a rule to only use original spare parts (e). Wearing parts of other manufacturers, e.g. brake pads or tyres that are not of identical dimension, may render your SCOTT bike unsafe. Risk of accident!

CLEANING AND CARING FOR YOUR SCOTT BIKE

Dried sweat, dirt and salt from riding during the winter or in sea air can harm your SCOTT bike. You should therefore make it a habit of cleaning all components at regular intervals **(f)**.

Avoid cleaning your bike with a high-pressure cleaner. The high-pressure jet is likely to enter bearings by passing through the seals and dilute the lubricants hereby increasing the friction. This destroys and impairs the functioning of the bearing races in the long term. High-pressure jets are also likely to remove frame and rim stickers.

A much more gentle way of cleaning your bike is with a low-pressure water jet or a bucket of water and a sponge or a large brush. Cleaning your bike by hand has another positive side-effect: You may discover defects in the paint as well as worn or defective components at an early stage.



After cleaning and drying **(a)** check the chain for wear **(b)** and relubricate **(c)** (see the chapter “Bicycle chain” and the manuals of the component manufacturers).

Apply a coat of standard hard wax **(d)** on painted, metal and carbon surfaces (except from brake surfaces and brake discs). Polish the waxed surfaces after drying to give them a nice shine.

⚠ WARNING

Keep cleaning agents and chain oil clear of the brake pads, brake discs and rim sides (braking surfaces). Otherwise the brake could fail. Never grease or lubricate the clamping areas of a frame made of carbon, e.g. handlebars, stem, seat post and seat tube. Once greased, carbon components may never again ensure reliable clamping!

While cleaning, watch out for cracks, scratches, dents as well as deformed or discoloured material. Have defective components replaced immediately and touch up paint defects. If you are in doubt or if you have any questions, contact your SCOTT dealer.

NOTICE

Do not clean your SCOTT bike with a high-pressure cleaner or a water jet and if you do, be sure to keep it at a distance. Do not aim at the bearings.

Only use petroleum-based solvents for cleaning tough oil or grease stains from paint and carbon surfaces. Never use degreasing agents containing acetone, methyl chloride or the like, or solvent-containing, non-neutral or chemical cleaning agents that could attack the surface!

The use of third Party Bike Shields / Protective Film is prohibited.



SHELTERING AND STORING YOUR SCOTT BIKE

If you regularly look after your SCOTT bike during the season, you will not need to take any special measures when storing it for a short time, apart from securing it against theft. Store your bike in a dry, well aerated place.

If you want to store your SCOTT bike for a longer period of time, e.g. over the winter months, please observe the following things: Inflated inner tubes tend to gradually lose air when the bike is not used for a long time. If your SCOTT bike is left standing on flat tyres for an extended period, this can cause damage to the structure of the tyres. It is therefore better to hang the wheels or the entire SCOTT bike **(e)** or to check the tyre pressure regularly **(f)**. Clean your SCOTT bike and protect it against corrosion. Your SCOTT dealer offers a variety of care products, such as spray wax etc.

Dismount the seat post and let dry away possibly penetrated humidity. Spray a little finely atomized oil into the metal seat tube. However, do not apply oil in a carbon seat tube. Shift the gear to the smallest chainring and the smallest sprocket. This relaxes the cables and the springs.

⚠ WARNING

Do not hang your SCOTT bike on carbon rims. Mount instead at least one aluminium wheel.

SAFETY INSTRUCTIONS

There are hardly any waiting times at your SCOTT dealer during the winter months. In addition, many SCOTT dealers offer an annual check-up at a special price. Benefit from the idle time and ask your SCOTT dealer to do the scheduled maintenance work!



SCOTT SERVICE AND MAINTENANCE SCHEDULE

It is advisable to have your SCOTT bike serviced regularly after the bedding-in phase. The schedule given in the table below is a rough guide for cyclists who ride their bike between 1,500 and 2,500 km or 60 to 100 hours of use a year.

If you consistently ride more or if you ride a great deal on poor road surfaces, the maintenance periods of the SCOTT service plan will shorten accordingly. This applies in particular to SCOTT cyclo-cross bicycles.

Component	What to do	Before every ride	Monthly	Annually	Other
Lighting	Check function, if necessary	▪			
Tyres	Check pressure	▪			
	Check tread and side walls		▪		
Brakes (rim brakes)	Check lever travel, wear of brake pads, position of pads relative to rim; test brakes in stationary	▪			
	Lever travel, brake pads and test brakes in stationary	▪			
Brakes, brake pads (rim brakes)	Clean		▪		
Brake cables/lines/pads	Visual inspection		▪		
Brakes (disc brakes)	Lever travel, brake pads, seals, test brakes in stationary	▪			
	Replace liquid (DOT-liquids)			○	
Rims (of rim brakes)	Check thickness, replace if necessary				○ after 2nd set of brake pads at the latest
					○ at least every two years
Fork	Check and replace, if necessary				○ at least every two years
Bottom bracket	Check for bearing play		▪		
	Dismount and regrease (cups)			○	
Chain	Check and grease, if necessary	▪			
	Check wear, replace, if necessary, derailleur gears				○ after 1,000 km or 50 hours of use
Crank	Check and retighten, if necessary		▪		
Painted/anodized/carbon surfaces	Polish				▪ every 6 months at least
Wheels/spokes	Check for trueness and tension		▪		
	True or retighten				○ if necessary
Handlebars and stem (aluminium and carbon)	Check and replace, if necessary				○ every 2 years at the latest

Component	What to do	Before every ride	Monthly	Annually	Other
Headset	Check for bearing play Regrease		▪		
Metal surfaces	Polish (except: rim sides of rim brakes, rotors)			○	▪ every 6 months at least
Hubs	Check for bearing play Regrease		▪		
Pedals (all)	Check for bearing play		▪		
Pedals (clipless)	Clean and grease locking mechanism		▪		
Seat post/stem	Check bolts Disassemble and regrease Carbon: new assembly paste (no grease!)		▪		
Front/rear derailleur	Clean and grease		▪		
Quick-releases	Check seat	▪			
Nuts (mudguards etc.)	Check and retighten, if necessary		▪		
Valves	Check seat	▪			
Cables gears/brakes	Disassemble and regrease			○	

If you have a certain degree of mechanical skills, experience and suitable tools, such as a torque wrench, you should be able to do the checks marked ▪ by yourself. If you come across any defects, take appropriate measures without delay. If you are in doubt or if you have any questions, contact your SCOTT dealer.

Jobs marked ○ are best left to your SCOTT dealer.

WARNING

For your own safety, bring your SCOTT bike to your SCOTT dealer for its first inspection after 100 to 300 kilometres, 5 to 15 hours of initial use or four to six weeks, and at the very latest after three months.

RECOMMENDED TORQUE SETTINGS FOR YOUR SCOTT BIKE

All bolted connections of the bike components have to be tightened carefully and checked regularly to ensure the safe and reliable operation of the SCOTT bike. This is best done with a torque wrench that disengages as soon as the desired torque value has been reached or a click-type torque wrench. Tighten carefully by approaching the prescribed maximum torque value in small steps (0.5 Nm increments) and check in between the proper fit of the component. Never exceed the maximum torque value indicated by the manufacturer!

Where no maximum torque setting is given start with 2 Nm. Observe the indicated values and observe the values on the components and/or in the manuals of the component manufacturers.

Component	Bolted connections	Shimano ¹ (Nm)	SRAM/Avid ² (Nm)	Tektro ³ (Nm)	TRP ⁴ (Nm)	Campagnolo ⁵ (Nm)
Rear derailleur	Mount (on frame/derailleur hanger)	8-10	8-12			15
	Cable clamp	5-7	4-5			6
	Pulley wheels	3-4				2.7
Front derailleur	Mount on frame	5-7	3-7			5-7
	Cable clamp	5-7	5-7			5
Shifter	Mount on handlebars	5	2-5.5			10
	Hole covering	0.3-0.5				
	Flatbar					6
Brake lever unit	Mount on handlebars	4-8	3-5.5	6-8		10
	Time trial brake lever			5-7		
	Flatbar					6
Hub	Quick-release lever	5-7.5				
	Lock nut for bearing adjustment of quick-release hubs	10-25				
	Sprocket cluster lock ring	29-49	40			40 (11-speed) 50 (10-speed)
Internal gear hub	Hub axle nut	30-45				
Crank	Crank mount (grease-free square-head)	35-50				32-38
	Crank mount (Shimano Octalink)	35-50				
	Crank mount (Shimano Hollowtech II)	12-14				
	Crank mount (Isis)		31-34			
	Crank mount (Giga X Pipe)		48-54			
	Splined					42
	Ultra Torque					42-60
	Chainring mount	8-11	12-14 (steel) 8-9 (alu)			8

Component	Bolted connections	Shimano ¹ (Nm)	SRAM/Avid ² (Nm)	Tektro ³ (Nm)	TRP ⁴ (Nm)	Campagnolo ⁵ (Nm)
Sealed cartridge bearing	Shell (square-head)	49-69				70
	Shell (Shimano Hollowtech II, SRAM Giga X Pipe)	35-50	34-41			35
	Shimano Octalink	50-70				(UltraTorque)
Pedal	Pedal axle	35				40
Shoe	Cleat	5-6				
	Spike	4				
Brake (V-brake)	Cable clamp	6-8	6-8	6-8	6-8	5
	Brake shoe mount	6-8	6-8	6-8	6-8	8
	Brake pad fixing	1-2				
	Brake boss frame/fork			8-10		

¹ www.shimano.com ² www.sram.com ³ www.tekro.com ⁴ www.trpbrakes.com ⁵ www.campagnolo.com

These values are reference values of the above-mentioned component manufacturers. Be sure to observe the values in the manuals of the component manufacturers. These values do not apply to the components of other manufacturers.

WARNING

Some components have the maximum permissible torque values printed on them. Use a torque wrench and never exceed the maximum torque value! If you are in doubt or if you have any questions, contact your SCOTT dealer.

NOTICE

Due to the unmanageable number of components on the market, SCOTT is not in a position to foresee every product that will be replaced or newly assembled by third parties. Therefore SCOTT denies any liability for such kind of additions or modifications with regard to compatibility, torque values etc. Whoever assembles or modifies the SCOTT bike shall ensure that the SCOTT bike is assembled according to the state of the art in science and technology.

RECOMMENDED TORQUE SETTINGS FOR DISC BRAKES ON YOUR SCOTT BIKE

Component	Shimano ¹ (Nm)	SRAM/Avid ² (Nm)	Tektro ³ (Nm)	TRP ⁴ (Nm)	Magura HS ⁵ (Nm)
Brake calliper mount on frame/fork	6-8	9.5	6-8	6-8	6
Brake lever unit on handlebars					
- Single-bolt clamp	4-8	3-5.5	5-7	3-5	4
- Two-bolt clamp		3			
Union screws of cable at grip and normal cable at brake calliper	5-7	5			4
Brake cable connector at brake calliper (disc tube cable)	5-7	5		5-6	3
Expansion tank cap	0.3-0.5				
Bleeding device brake calliper	4-6		4-6		4
Bleeding device brake lever	0.5-1				0.5
Brake disc fixing (6-holes)	4	6.2	4-6	4-6	4
Brake disc fixing (centerlock)	40-50			40	
Hose (union nut) direct connection	5-7				4
Slave cylinder (bleeder screw)					4
Brake pad retainer at brake calliper	2-4	1	3-5		2.5
Cable clamp at brake calliper	6-8		6-8	6-8	

¹ www.shimano.com ² www.sram.com ³ www.tekro.com ⁴ www.trpbrakes.com ⁵ www.magura.com

These values are reference values of the above-mentioned component manufacturers. Be sure to observe the values in the manuals of the component manufacturers. These values do not apply to the components of other manufacturers.

WARNING

Some components have the maximum permissible torque values printed on them. Use a torque wrench and never exceed the maximum torque value! If you are in doubt or if you have any questions, contact your SCOTT dealer.

NOTICE

Due to the unmanageable number of components on the market, SCOTT is not in a position to foresee every product that will be replaced or newly assembled by third parties. Therefore SCOTT denies any liability for such kind of additions or modifications with regard to compatibility, torque values etc. Whoever assembles or modifies the SCOTT bike shall ensure that the bike was assembled according to the state of the art in science and technology.

LEGAL REQUIREMENTS FOR RIDING ON PUBLIC ROADS

If you want to use your SCOTT bike for riding on public roads **(d)**, it has to be equipped according to the regulations of the respective country.

Pay particular attention to your SCOTT bike being equipped with the prescribed lighting **(e)** and reflectors **(f)**.

Ask your SCOTT dealer to inform you about the road traffic regulations in force in your country. Make yourself familiar with the road traffic regulations for riding on public roads and off-road.

⚠ WARNING

For your own safety, be sure to switch on the light as soon as dusk sets in.

Keep the lighting set clean and check its functioning at regular intervals.

SAFETY INSTRUCTIONS

When riding on public roads cyclists must in general observe the same regulations as car drivers. Make yourself familiar with the road traffic regulations of your country.

You find more important tips for riding in chapter “Safety and behaviour”.



WARRANTY AND GUARANTEE

Your SCOTT bike was manufactured with great care. Normally it is delivered to you by your SCOTT dealer fully assembled.

As direct purchaser you have full warranty rights within the first two years after purchase. Please contact your SCOTT dealer in the event of defects.

To ensure a smooth handling of your claim, it is necessary to present your receipt, your SCOTT handover report and the proofs of the service plan. Therefore, be sure to keep these documents in a safe place.

To ensure a long service life and good durability of your SCOTT bike, use it only for its intended purpose (see the chapter “Intended use of your SCOTT bike” and the handover report in the Quick Start Manual). Please observe the permissible load specifications as specified on the handover report. Be sure to follow the mounting instructions of the manufacturers (above all, the torque values of the bolts) as well as the prescribed maintenance schedule.

Observe the checks and routines listed in this owner’s manual or in any other manuals enclosed with this delivery (see the chapter “SCOTT service and maintenance schedule”) as well as any instructions concerning the replacement of safety-relevant components such as handlebars or brakes etc.

⚠ WARNING

Keep in mind that retrofitted accessories can impair the functioning of your SCOTT bike. If you are in doubt or if you have any questions, contact your SCOTT dealer.

SAFETY INSTRUCTIONS

The law referring to full warranty rights is only valid in the countries where the law has been ratified according to the renewed European regulations. Please inform yourself about the situation in your country.



NOTES ON WEARING PARTS

Some components of your SCOTT bike are subject to wear due to their function **(a+b)**. The rate of wear will depend on care and maintenance and the way you use your SCOTT bike (mileage, riding in the rain, dirt, salt etc.). SCOTT bikes that are often left standing in the open may also be subject to increased wear through weathering.

The components below require regular care **(c+d)** and maintenance. The following parts which have reached their limit of wear must be replaced:

Drive chain
Brake pads
Brake fluid (DOT)
Brake discs/rotors **(e)**
Brake cables
Brake cable housings
Rim sides (of rim brakes) **(f)**
Rubber grips
Chainrings
Chainstay protection

Bearings in hubs, joints etc.
Handlebar tape
Tyres and inner tubes
Sprockets
Saddle covering / saddle
Pulleys
Bowden cables
Cable housings
Inner tubes
Lubricants



MANUFACTURER'S GUARANTEE

When purchasing a new SCOTT bicycle from an authorized SCOTT dealer, SCOTT grants a manufacturer's guarantee subject to the following provisions.

Conditions

The manufacturer's guarantee is only granted to the first-time buyer of a SCOTT bicycle who has purchased it from an authorized SCOTT dealer. The manufacturer's guarantee only applies if the bicycle is registered to the first buyer at www.Scott-sports.com within ten days of purchase.

Duration

The manufacturer's guarantee is granted from the date of purchase for a period of five years on bicycle frames and rear ends. The guarantee period is reduced to three years, if the SCOTT bicycle is not serviced at least once a year by an authorized SCOTT dealer. Maintenance services must be carried out in accordance with the maintenance instructions in the SCOTT manual and must be confirmed there by the stamp and signature of the authorized SCOTT dealer.

For frames and rear ends of Category 5 bicycle models and for rigid forks manufactured by SCOTT, the duration of the manufacturer's guarantee is limited to two years.

If a defect on the SCOTT bicycle is remedied within the scope of a manufacturer's guarantee or a warranty claim, the duration of the manufacturer's guarantee is not extended. The manufacturer's guarantee ends, when the first-time buyer transfers ownership of the SCOTT bicycle to a third person.

Assertion

The manufacturer's guarantee is provided by SCOTT Sports SA, Route du Crochet 11, 1762 Givisiez, Switzerland. The buyer must inspect the SCOTT bicycle immediately after purchase and notify his authorized SCOTT dealer at once in writing of any obvious defects. Hidden defects must be reported immediately after their discovery. In the event of a guarantee claim, the SCOTT bicycle must be handed over to an authorized SCOTT dealer. The latter will contact SCOTT to remedy the defect. The assertion of a guarantee claim always requires the presentation of the original proof of purchase as well as the proof of maintenance service in the SCOTT manual.

Performance of SCOTT in the event of a guarantee claim

In the event of a guarantee claim, SCOTT will, at its own discretion, repair the defect or replace the defective product with a product of similar quality, where-by colour and model deviations are possible. If a repair or replacement is not possible, a purchase price refund will be made taking into account previous use. SCOTT is entitled to commission third parties to remedy the defect.

Limitations

The manufacturer's guarantee applies exclusively to frames, swingarms and rigid forks of SCOTT bicycles. Bicycle components are excluded from this manufacturer's guarantee.

The manufacturer's guarantee does not apply to normal wear and tear, damage caused by accidents or other excessive force on the SCOTT bicycle, corrosion, improper maintenance, incorrect assembly and assembly of unsuitable components or accessories as well as cosmetic defects, for example in the varnish.

The manufacturer's guarantee does not apply to SCOTT bicycles that have been used in a rental shop.

Miscellaneous

These manufacturer's guarantee provisions apply to all SCOTT bicycles as of model year 2023.

Statutory warranty rights of the buyer and guarantees of component manufacturers (Shimano, SRAM etc.) remain unaffected by this manufacturer's guarantee.

The place of jurisdiction for all disputes in connection with this manufacturer's guarantee is Freiburg, Switzerland. This manufacturer's guarantee is subject to Swiss law to the exclusion of all legislation that refers to foreign law.

All rights reserved ©2022 SCOTT Sports SA

Distribution: SSG (Europe) Distribution Center SA
P.E.D Zone C1, Rue Du Kiell 60 | 6790 Aubange | Belgium

V9.1/10042022



WWW.SCOTT-SPORTS.COM

SCOTT Sports SA

Route du Crochet 11, CH-1762 Givisiez

Phone: +41 26 460 16 16 | Fax: +41 26 460 16 00

Email: webmaster.marketing@scott-sports.com
