


2025 Scott Aspect 960 orange Bike

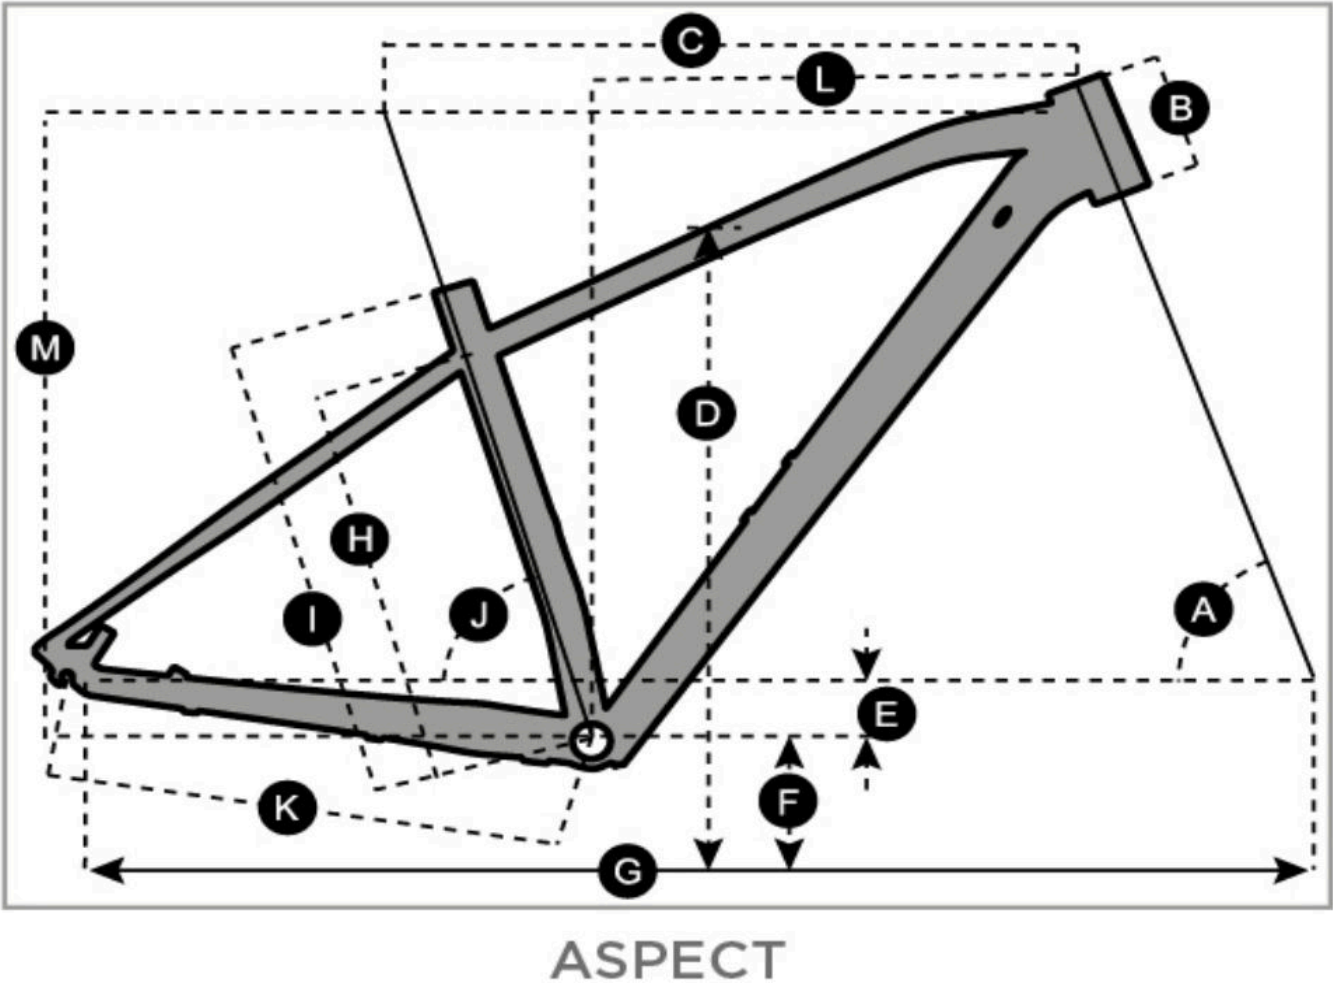

Geometry Chart (Inches)

| Sl no. | Specifications | XS | S | M | L | XL | XXL |
|--------|-----------------------------|---------|---------|---------|---------|---------|---------|
| A | head tube angle | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° |
| B | head tube length | 3.7 in | 3.9 in | 4.3 in | 4.7 in | 5.3 in | 5.9 in |
| C | top tube horizontal | 22.0 in | 23.0 in | 23.6 in | 24.2 in | 25.0 in | 25.8 in |
| D | standover height | 29.3 in | 30.4 in | 30.8 in | 32.3 in | 33.7 in | 35.1 in |
| E | BB offset | -2.4 in | -2.4 in | -2.4 in | -2.4 in | -2.4 in | -2.4 in |
| F | BB height | 12.4 in | 12.4 in | 12.4 in | 12.4 in | 12.4 in | 12.4 in |
| G | wheel base | 43.4 in | 42.9 in | 43.4 in | 44.2 in | 45.0 in | 45.8 in |
| H | BB center to toptube center | 12.2 in | 13.7 in | 15.5 in | 17.1 in | 19.1 in | 21.0 in |

| | | | | | | | |
|---|------------------------------|---------|---------|---------|---------|---------|---------|
| I | BB center to top of seattube | 14.0 in | 15.6 in | 17.3 in | 18.9 in | 20.9 in | 22.8 in |
| J | seat angle | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° |
| K | chainstay | 17.7 in | 17.7 in | 17.7 in | 17.7 in | 17.7 in | 17.7 in |
| L | reach | 15.3 in | 16.0 in | 16.5 in | 17.0 in | 17.6 in | 18.2 in |
| M | stack | 22.8 in | 23.7 in | 24.1 in | 24.5 in | 25.0 in | 25.6 in |
| N | stem length | 2.0 in | 2.4 in | 2.8 in | 3.1 in | 3.5 in | 3.9 in |

Geometry Chart (MM)

| SI no. | Specifications | XS | S | M | L | XL | XXL |
|--------|------------------------------|------------|------------|------------|------------|------------|------------|
| A | head tube angle | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° | 68.5 ° |
| B | head tube length | 95.0 mm | 100.0 mm | 110.0 mm | 120.0 mm | 135.0 mm | 150.0 mm |
| C | top tube horizontal | 560.0 mm | 585.0 mm | 600.0 mm | 615.0 mm | 635.0 mm | 655.0 mm |
| D | standover height | 743.0 mm | 771.0 mm | 783.0 mm | 821.0 mm | 857.0 mm | 891.0 mm |
| E | BB offset | -60.0 mm | -60.0 mm | -60.0 mm | -60.0 mm | -60.0 mm | -60.0 mm |
| F | BB height | 316.0 mm | 316.0 mm | 316.0 mm | 316.0 mm | 316.0 mm | 316.0 mm |
| G | wheel base | 1,102.0 mm | 1,090.0 mm | 1,102.0 mm | 1,123.0 mm | 1,144.0 mm | 1,164.0 mm |
| H | BB center to toptube center | 309.0 mm | 349.0 mm | 394.0 mm | 434.0 mm | 484.0 mm | 534.0 mm |
| I | BB center to top of seattube | 355.0 mm | 395.0 mm | 440.0 mm | 480.0 mm | 530.0 mm | 580.0 mm |
| J | seat angle | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° | 73.5 ° |
| K | chainstay | 450.0 mm | 450.0 mm | 450.0 mm | 450.0 mm | 450.0 mm | 450.0 mm |
| L | reach | 388.0 mm | 406.0 mm | 419.0 mm | 431.0 mm | 447.0 mm | 463.0 mm |
| M | stack | 580.0 mm | 603.0 mm | 612.0 mm | 622.0 mm | 636.0 mm | 649.0 mm |
| N | stem length | 50.0 mm | 60.0 mm | 70.0 mm | 80.0 mm | 90.0 mm | 100.0 mm |