


2025 Scott Ransom eRIDE 920 Bike

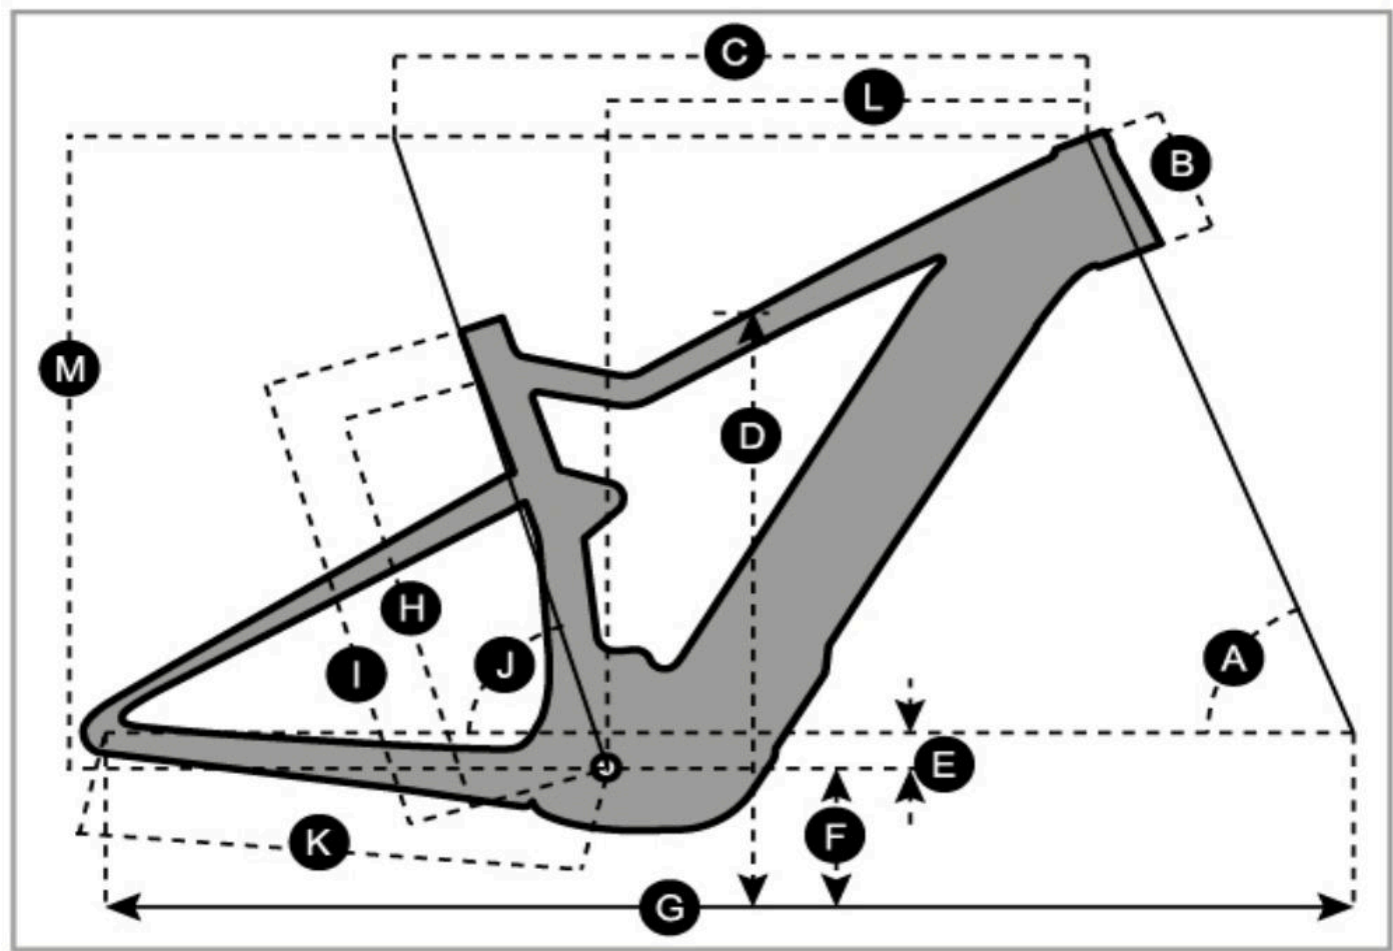

Geometry Chart (Inches)

SI no.	Specifications	S / 900	S / 700	M / 900	M / 700	L / 900	L / 700	XL / 900	XL / 700
		LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting
A	head tube angle	64.0 °	64.6 °	64.0 °	64.6 °	64.0 °	64.6 °	64.0 °	64.6 °
B	head tube length	4.7 in	4.7 in	4.7 in	4.7 in	4.9 in	4.9 in	4.9 in	4.9 in
C	top tube horizontal	22.4 in	22.4 in	23.4 in	23.5 in	24.8 in	24.8 in	26.0 in	26.1 in
D	standover height	30.0 in	29.6 in	30.2 in	29.8 in	31.1 in	30.7 in	31.5 in	31.1 in

E	BB offset	-0.9 in	-0.5 in	-0.9 in	-0.5 in	-0.9 in	-0.5 in	-0.9 in	-0.5 in
F	BB height	13.9 in	13.7 in	13.9 in	13.7 in	13.9 in	13.7 in	13.9 in	13.7 in
G	wheel base	48.4 in	48.4 in	49.4 in	49.3 in	50.7 in	50.6 in	51.9 in	51.8 in
H	BB center to toptube center								
I	BB center to top of seattube	16.5 in	16.5 in	17.3 in	17.3 in	18.5 in	18.5 in	19.7 in	19.7 in
J	seat angle	76.5 °	77.2 °	76.3 °	77.0 °	76.1 °	76.8 °	75.9 °	76.6 °
K	chainstay	18.3 in	18.2 in	18.3 in	18.2 in	18.3 in	18.2 in	18.3 in	18.2 in
L	reach	16.3 in	16.6 in	17.3 in	17.6 in	18.5 in	18.8 in	19.7 in	20.0 in
M	stack	25.4 in	25.2 in	25.4 in	25.2 in	25.6 in	25.3 in	25.6 in	25.3 in
N	stem length	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in
O	trail	5.4 in	4.9 in	5.4 in	4.9 in	5.4 in	4.9 in	5.4 in	4.9 in

### Geometry Chart (MM)

SI no.	Specifications	S / 900	S / 700	M / 900	M / 700	L / 900	L / 700	XL / 900	XL / 700
		LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting
A	head tube angle	64.0 °	64.6 °	64.0 °	64.6 °	64.0 °	64.6 °	64.0 °	64.6 °
B	head tube length	120.0 mm	120.0 mm	120.0 mm	120.0 mm	125.0 mm	125.0 mm	125.0 mm	125.0 mm
C	top tube horizontal	568.0 mm	569.5 mm	595.5 mm	597.0 mm	628.8 mm	630.5 mm	660.7 mm	662.5 mm
D	standover height	762.0 mm	753.0 mm	766.0 mm	758.0 mm	790.0 mm	780.0 mm	800.0 mm	790.0 mm
E	BB offset	-22.0 mm	-13.0 mm	-22.0 mm	-13.0 mm	-22.0 mm	-13.0 mm	-22.0 mm	-13.0 mm
F	BB height	353.5 mm	348.5 mm	353.5 mm	348.5 mm	353.5 mm	348.5 mm	353.5 mm	348.5 mm
G	wheel base	1,230.3 mm	1,228.4 mm	1,255.3 mm	1,253.4 mm	1,287.5 mm	1,285.6 mm	1,317.5 mm	1,315.6 mm
H	BB center to toptube center								
I	BB center to top of seattube	420.0 mm	420.0 mm	440.0 mm	440.0 mm	470.0 mm	470.0 mm	500.0 mm	500.0 mm
J	seat angle	76.5 °	77.2 °	76.3 °	77.0 °	76.1 °	76.8 °	75.9 °	76.6 °
K	chainstay	465.0 mm	462.9 mm	465.0 mm	462.9 mm	465.0 mm	462.9 mm	465.0 mm	462.9 mm
L	reach	415.0 mm	422.3 mm	440.0 mm	447.3 mm	470.0 mm	477.4 mm	500.0 mm	507.3 mm
M	stack	644.4 mm	639.7 mm	644.4 mm	639.7 mm	649.0 mm	643.5 mm	649.0 mm	643.5 mm

N	stem length	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm
0	trail	136.4 mm	125.4 mm	136.4 mm	125.4 mm	136.4 mm	125.4 mm	136.4 mm	125.4 mm

,