


2025 Scott Silence eRIDE 20 Men Speed Bike

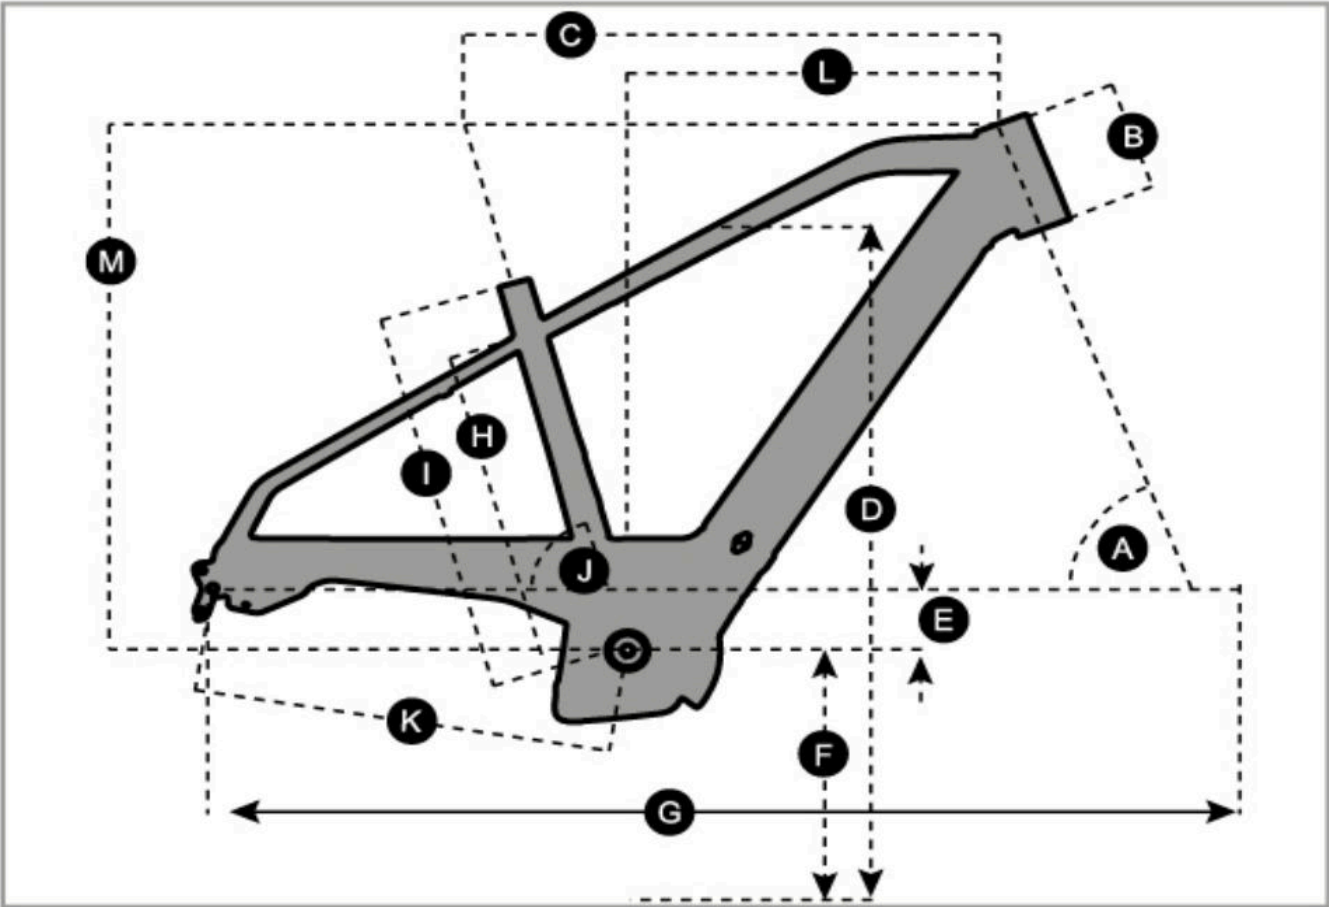

Geometry Chart (Inches)

Sl no.	Specifications	S	M	L	XL
A	head tube angle	68.5 °	69.0 °	70.0 °	70.0 °
B	head tube length	5.3 in	5.3 in	6.1 in	6.9 in
C	top tube horizontal	23.0 in	23.6 in	24.4 in	25.2 in
D	standover height	31.5 in	31.9 in	32.5 in	33.1 in
E	BB offset	-3.0 in	-3.0 in	-3.0 in	-3.0 in
F	BB height	11.9 in	11.9 in	11.9 in	11.9 in
G	wheel base	45.3 in	45.3 in	45.7 in	46.3 in
H	BB center to toptube center				

I	BB center to top of seattube	17.3 in	18.1 in	19.7 in	21.7 in
J	seat angle	74.7 °	74.0 °	74.0 °	73.5 °
K	chainstay	18.5 in	18.5 in	18.5 in	18.5 in
L	reach	16.2 in	16.5 in	17.0 in	17.3 in
M	stack	24.9 in	25.0 in	25.9 in	26.6 in
N	stem length	3.5 in	3.5 in	3.5 in	3.5 in
0	trail	3.7 in	3.5 in	3.3 in	3.3 in

Geometry Chart (MM)

Sl no.	Specifications	S	M	L	XL
A	head tube angle	68.5 °	69.0 °	70.0 °	70.0 °
B	head tube length	135.0 mm	135.0 mm	155.0 mm	175.0 mm
C	top tube horizontal	585.0 mm	600.0 mm	620.0 mm	640.0 mm
D	standover height	800.0 mm	810.0 mm	825.0 mm	840.0 mm
E	BB offset	-75.0 mm	-75.0 mm	-75.0 mm	-75.0 mm
F	BB height	301.0 mm	301.0 mm	301.0 mm	301.0 mm
G	wheel base	1,150.3 mm	1,151.5 mm	1,161.7 mm	1,176.8 mm
H	BB center to toptube center				
I	BB center to top of seattube	440.0 mm	460.0 mm	500.0 mm	550.0 mm
J	seat angle	74.7 °	74.0 °	74.0 °	73.5 °
K	chainstay	470.0 mm	470.0 mm	470.0 mm	470.0 mm
L	reach	412.0 mm	418.0 mm	431.3 mm	439.5 mm
M	stack	632.2 mm	634.6 mm	658.0 mm	676.8 mm
N	stem length	90.0 mm	90.0 mm	90.0 mm	90.0 mm
0	trail	93.3 mm	89.7 mm	82.6 mm	82.6 mm