


2025 Scott Speedster Gravel 30 Bike

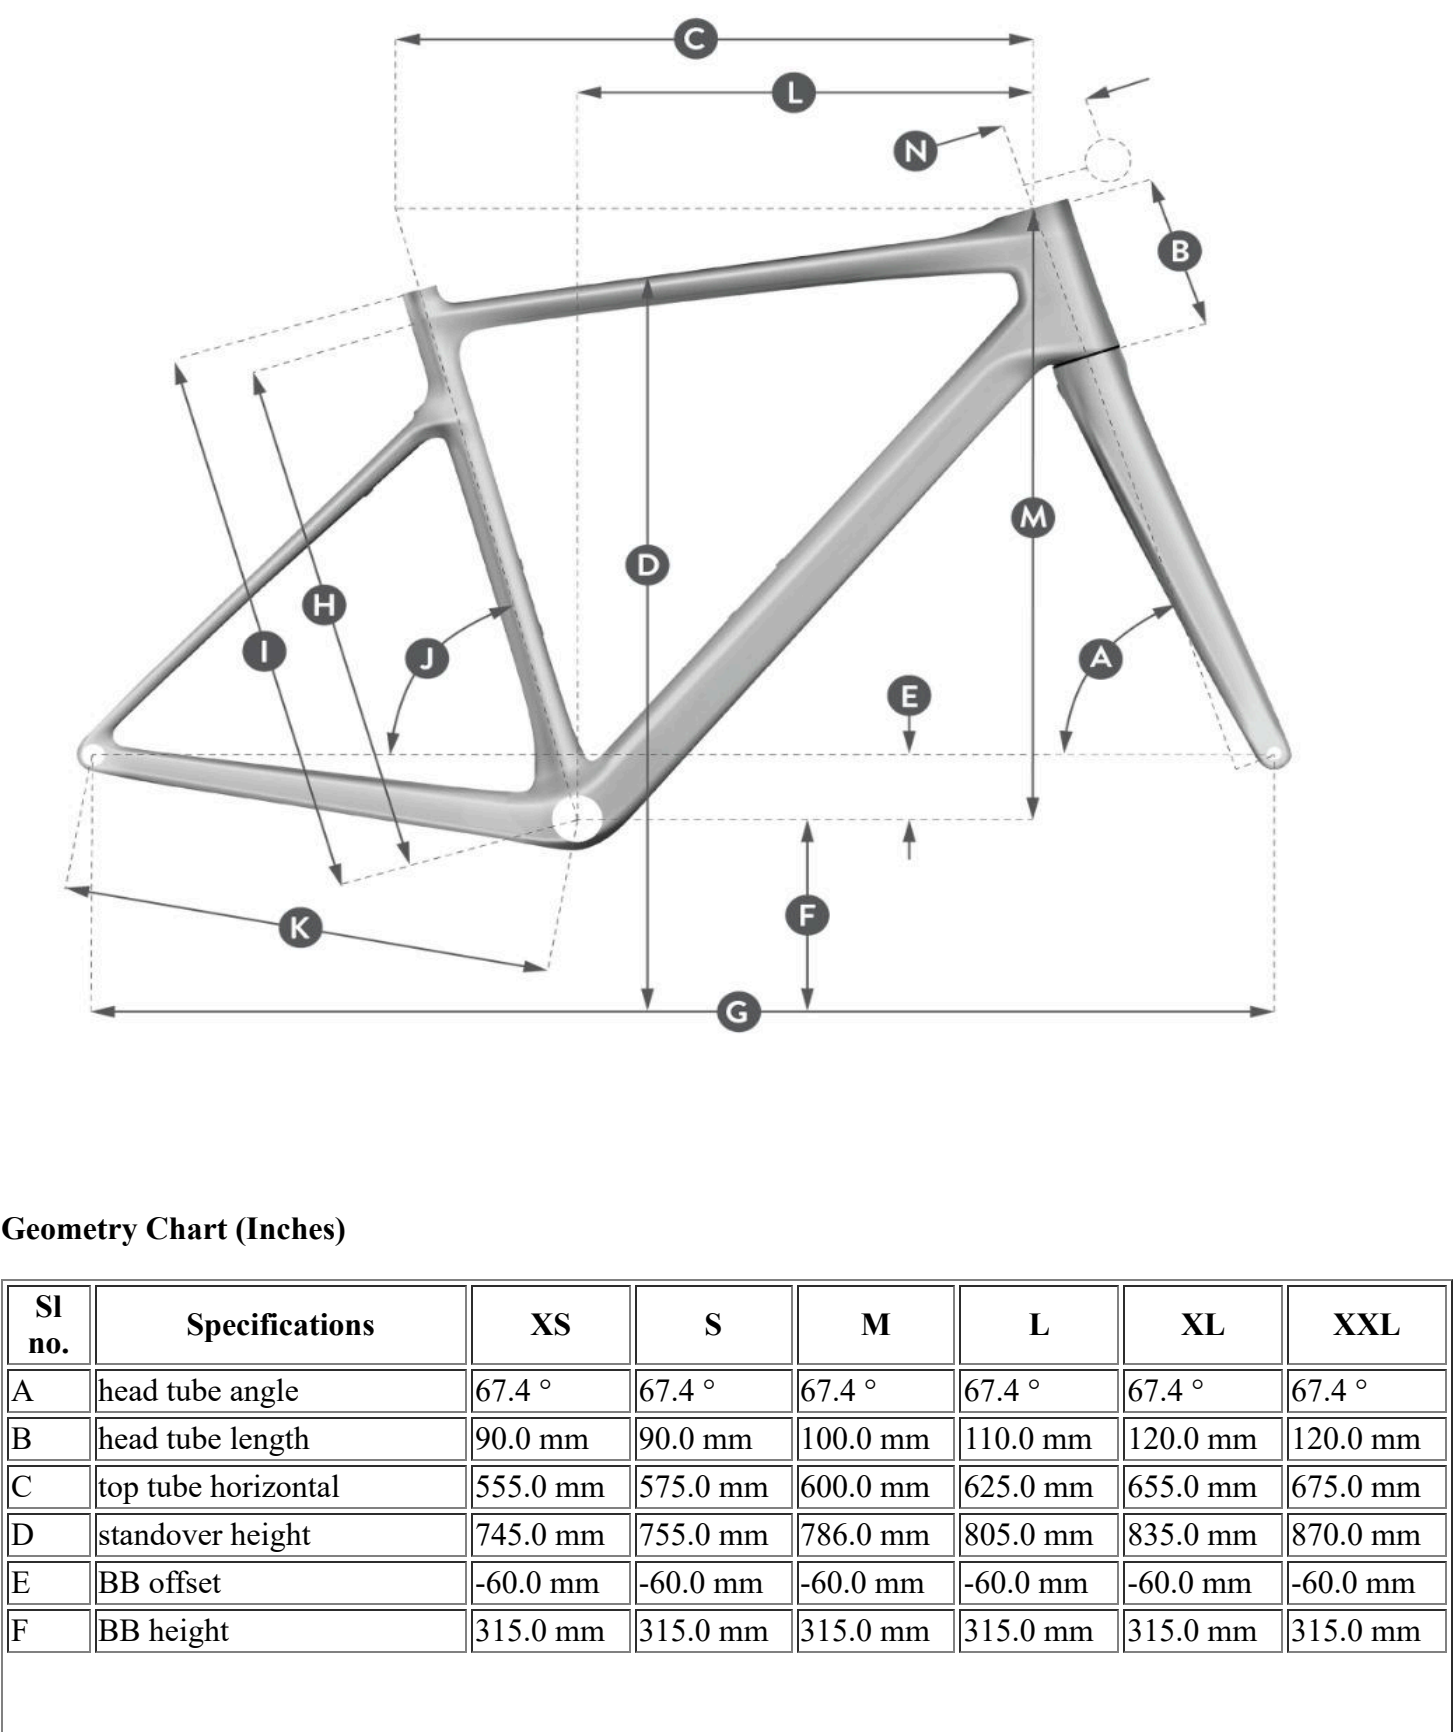

G	wheel base	1,091.4 mm	1,111.8 mm	1,138.2 mm	1,164.6 mm	1,195.9 mm	1,215.9 mm
H	BB center to toptube center						
I	BB center to top of seattube	360.0 mm	390.0 mm	440.0 mm	480.0 mm	530.0 mm	580.0 mm
J	seat angle	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °
K	chainstay	425.0 mm	425.0 mm	425.0 mm	425.0 mm	425.0 mm	425.0 mm
L	reach	400.3 mm	420.3 mm	442.8 mm	463.3 mm	492.9 mm	512.9 mm
M	stack	596.1 mm	596.1 mm	605.3 mm	614.6 mm	623.8 mm	623.8 mm
N	stem length	50.0 mm	50.0 mm	60.0 mm	70.0 mm	80.0 mm	80.0 mm
O	trail	506.0 mm	112.6 mm	112.6 mm	112.6 mm	112.6 mm	
P	Fork length	160.0 mm	506.0 mm	506.0 mm	506.0 mm	506.0 mm	112.6 mm
Q	Maximum Seatpost Insertion	160.0 mm	210.0 mm	250.0 mm	300.0 mm	506.0 mm	
R	Crank Length	170.0 mm	170.0 mm	175.0 mm	175.0 mm	350.0 mm	

Geometry Chart (MM)

Sl no.	Specifications	XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	head tube angle	70.0 °	70.0 °	70.0 °	71.0 °	71.0 °	71.0 °	71.0 °
B	head tube length	93.0 mm	103.0 mm	123.0 mm	143.0 mm	163.0 mm	183.0 mm	203.0 mm
C	top tube horizontal	512.3 mm	523.0 mm	536.5 mm	556.5 mm	571.2 mm	581.2 mm	594.2 mm
D	standover height	747.0 mm	762.0 mm	786.0 mm	806.0 mm	825.0 mm	844.0 mm	869.0 mm
E	BB offset	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm	-71.0 mm
F	BB height	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm	283.0 mm
G	wheel base	1,019.5 mm	1,026.9 mm	1,037.7 mm	1,044.9 mm	1,056.4 mm	1,067.0 mm	1,071.3 mm
H	BB center to toptube center	430.0 mm	450.0 mm	480.0 mm	500.0 mm	520.0 mm	540.0 mm	570.0 mm
I	BB center to top of seattube	470.0 mm	490.0 mm	520.0 mm	540.0 mm	560.0 mm	580.0 mm	610.0 mm
J	seat angle	75.0 °	74.5 °	74.0 °	73.0 °	72.5 °	72.5 °	72.5 °
K	chainstay	435.0 mm	435.0 mm	435.0 mm	439.0 mm	439.0 mm	439.0 mm	439.0 mm
L	reach	374.0 mm	378.0 mm	382.0 mm	387.0 mm	392.0 mm	396.0 mm	403.0 mm
M	stack	519.0 mm	528.4 mm	547.2 mm	570.0 mm	588.9 mm	607.8 mm	626.8 mm
N	stem length	73.0 mm	83.0 mm	93.0 mm	103.0 mm	103.0 mm	113.0 mm	113.0 mm