


2025 Scott Sub Cross eRIDE 30 Men Bike

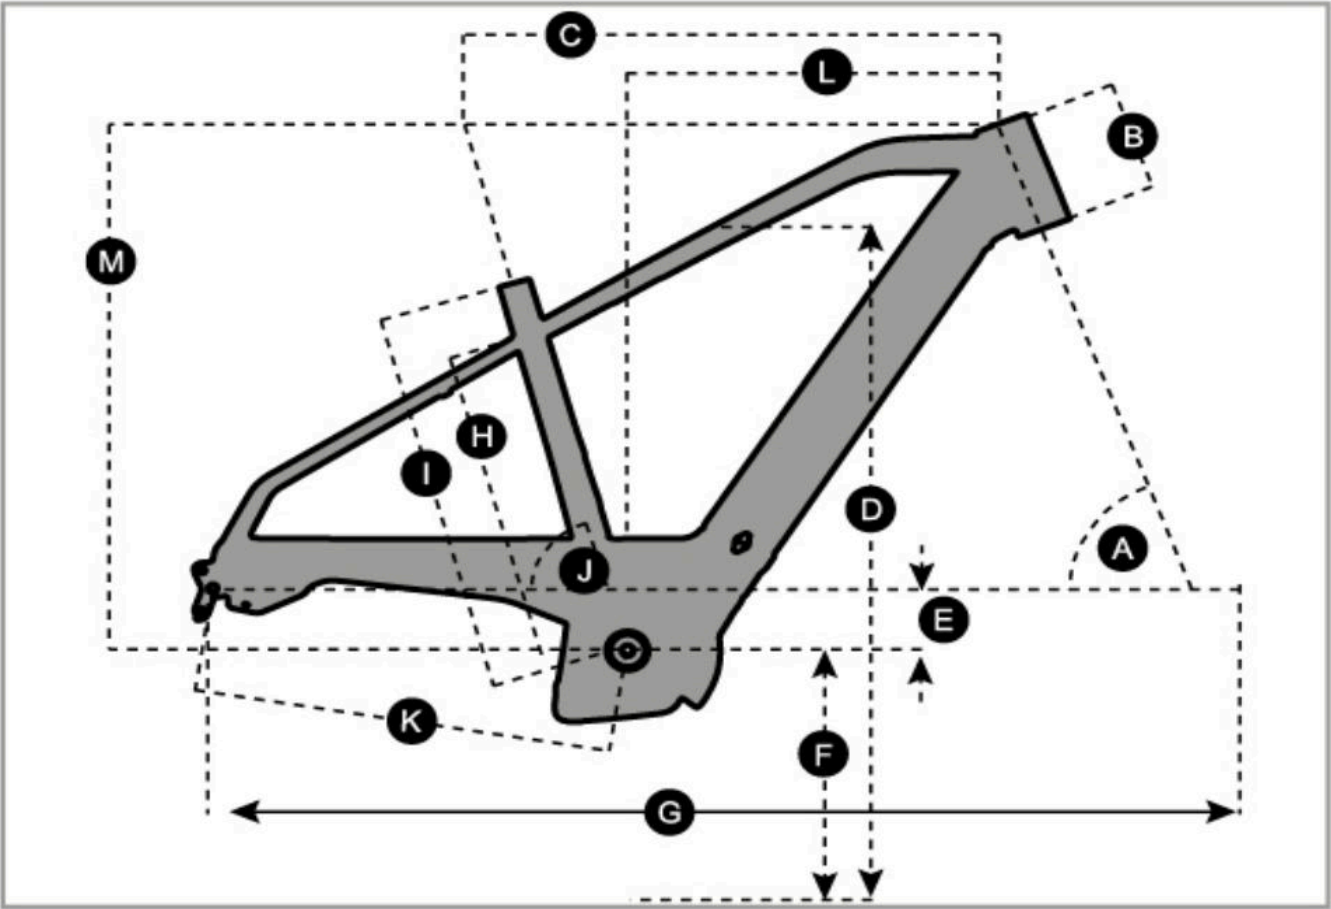

Geometry Chart (Inches)

Sl no.	Specifications	S	M	L	XL
A	head tube angle	69.5 °	70.0 °	70.5 °	70.5 °
B	head tube length	5.1 in	5.5 in	6.3 in	7.3 in
C	top tube horizontal	22.8 in	23.6 in	24.4 in	25.2 in
D	standover height	30.5 in	31.7 in	32.7 in	34.2 in
E	BB offset	3.0 in	3.0 in	3.0 in	3.0 in
F	BB height	17.3 in	17.3 in	17.3 in	17.3 in
G	wheel base	45.0 in	45.2 in	45.9 in	46.7 in
H	BB center to toptube center				

I	BB center to top of seattube	17.3 in	18.9 in	20.5 in	22.0 in
J	seat angle	74.5 °	74.5 °	74.5 °	74.5 °
K	chainstay	18.9 in	18.9 in	18.9 in	18.9 in
L	reach	15.9 in	16.6 in	17.2 in	17.7 in
M	stack	24.8 in	25.2 in	26.1 in	27.0 in
N	stem length	4.3 in	4.3 in	4.3 in	4.3 in
0	trail	3.5 in	3.4 in	3.2 in	3.2 in

Geometry Chart (MM)

Sl no.	Specifications	S	M	L	XL
A	head tube angle	69.5 °	70.0 °	70.5 °	70.5 °
B	head tube length	130.0 mm	140.0 mm	160.0 mm	185.0 mm
C	top tube horizontal	580.0 mm	600.0 mm	620.0 mm	640.0 mm
D	standover height	775.0 mm	804.0 mm	831.0 mm	869.0 mm
E	BB offset	75.0 mm	75.0 mm	75.0 mm	75.0 mm
F	BB height	440.5 mm	440.5 mm	440.5 mm	440.5 mm
G	wheel base	1,142.0 mm	1,149.0 mm	1,165.0 mm	1,187.0 mm
H	BB center to toptube center				
I	BB center to top of seattube	440.0 mm	480.0 mm	520.0 mm	560.0 mm
J	seat angle	74.5 °	74.5 °	74.5 °	74.5 °
K	chainstay	480.0 mm	480.0 mm	480.0 mm	480.0 mm
L	reach	405.0 mm	422.0 mm	436.0 mm	450.0 mm
M	stack	630.0 mm	641.0 mm	662.0 mm	685.0 mm
N	stem length	110.0 mm	110.0 mm	110.0 mm	110.0 mm
0	trail	89.5 mm	86.0 mm	82.5 mm	82.5 mm