


2025 Yeti SB140 - Geometric Chart

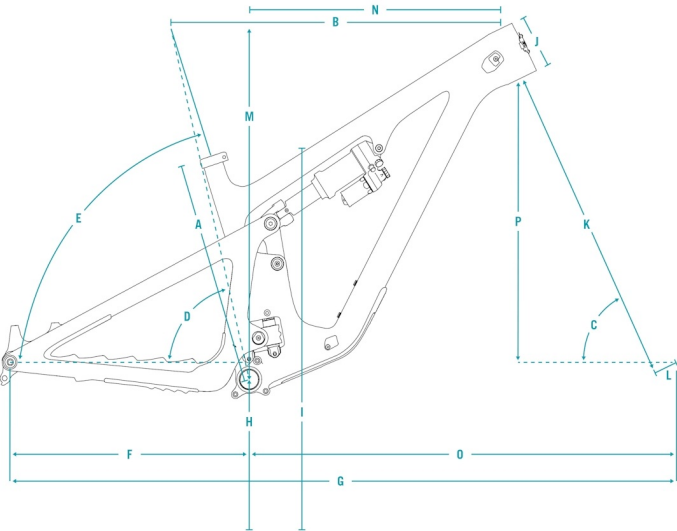

SB140

Geometric Table (Inches)

|                            | SM   | MD   | LG   | XL   | XXL  |
|----------------------------|------|------|------|------|------|
| A SEAT TUBE LENGTH         | 14.4 | 15.7 | 17.3 | 18.5 | 19.1 |
| B EFFECTIVE TOPTUBE LENGTH | 22.5 | 23.7 | 24.5 | 25.6 | 26.4 |
| C HEADTUBE ANGLE           | 65.4 | 65.4 | 65.4 | 65.4 | 65.4 |
| D EFF. SEAT TUBE ANGLE     | 77.5 | 77.5 | 77.5 | 77.4 | 77.4 |
| E ACTUAL SEAT TUBE ANGLE   | 72.2 | 72.6 | 72.8 | 73.2 | 73.7 |
| F CHAINSTAY LENGTH         | 17.2 | 17.2 | 17.3 | 17.4 | 17.5 |
| G WHEELBASE                | 46.6 | 47.9 | 48.9 | 50.1 | 51.2 |
| H ESTIMATED BB HEIGHT      | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 |
| I STANDOVER                | 28.4 | 28.7 | 28.9 | 28.9 | 29.1 |
| J HEADTUBE LENGTH          | 3.6  | 3.7  | 4.0  | 4.4  | 5.3  |
| K FORK AXLE TO CROWN       | 22.2 | 22.2 | 22.2 | 22.2 | 22.2 |
| L FORK OFFSET              | 1.7  | 1.7  | 1.7  | 1.7  | 1.7  |
| M STACK                    | 24.2 | 24.3 | 24.5 | 24.9 | 25.6 |
| N REACH                    | 17.1 | 18.3 | 19.1 | 20.1 | 20.7 |
| O FRONT CENTER             | 29.5 | 30.7 | 31.6 | 32.7 | 33.7 |
| P Vertical Fork Travel     | 5.4  | 5.4  | 5.4  | 5.4  | 5.4  |

Geometric Table (mm)

|                            | SM   | MD   | LG   | XL   | XXL  |
|----------------------------|------|------|------|------|------|
| A SEAT TUBE LENGTH         | 365  | 400  | 440  | 470  | 485  |
| B EFFECTIVE TOPTUBE LENGTH | 571  | 602  | 623  | 650  | 670  |
| C HEADTUBE ANGLE           | 65.4 | 65.4 | 65.4 | 65.4 | 65.4 |
| D EFF. SEAT TUBE ANGLE     | 77.5 | 77.5 | 77.5 | 77.4 | 77.4 |
| E ACTUAL SEAT TUBE ANGLE   | 72.2 | 72.6 | 72.8 | 73.2 | 73.7 |
| F CHAINSTAY LENGTH         | 436  | 438  | 440  | 442  | 444  |
| G WHEELBASE                | 1184 | 1217 | 1242 | 1273 | 1300 |
| H ESTIMATED BB HEIGHT      | 339  | 339  | 339  | 339  | 339  |
| I STANDOVER                | 722  | 729  | 733  | 735  | 740  |
| J HEADTUBE LENGTH          | 92   | 95   | 100  | 112  | 134  |
| K FORK AXLE TO CROWN       | 565  | 565  | 565  | 565  | 565  |
| L FORK OFFSET              | 44   | 44   | 44   | 44   | 44   |
| M STACK                    | 614  | 617  | 621  | 631  | 651  |
| N REACH                    | 435  | 465  | 485  | 510  | 525  |
| O FRONT CENTER             | 748  | 779  | 802  | 831  | 856  |
| P Vertical Fork Travel     | 136  | 136  | 136  | 136  | 136  |

SB140 LR

Geometric Table (Inches)

|                            | SM   | MD   | LG   | XL   | XXL  |
|----------------------------|------|------|------|------|------|
| A SEAT TUBE LENGTH         | 14.4 | 15.7 | 17.3 | 18.5 | 19.1 |
| B EFFECTIVE TOPTUBE LENGTH | 22.5 | 23.7 | 24.5 | 25.6 | 26.4 |
| C HEADTUBE ANGLE           | 65.4 | 65.4 | 65.4 | 65.4 | 65.4 |
| D EFF. SEAT TUBE ANGLE     | 77.5 | 77.5 | 77.5 | 77.4 | 77.4 |
| E ACTUAL SEAT TUBE ANGLE   | 72.2 | 72.6 | 72.8 | 73.2 | 73.7 |
| F CHAINSTAY LENGTH         | 17.2 | 17.2 | 17.3 | 17.4 | 17.5 |
| G WHEELBASE                | 46.6 | 47.9 | 48.9 | 50.1 | 51.2 |
| H ESTIMATED BB HEIGHT      | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 |
| I STANDOVER                | 28.4 | 28.7 | 28.9 | 28.9 | 29.1 |
| J HEADTUBE LENGTH          | 3.6  | 3.7  | 4.0  | 4.4  | 5.3  |
| K FORK AXLE TO CROWN       | 22.2 | 22.2 | 22.2 | 22.2 | 22.2 |
|                            |      |      |      |      |      |

|   |                      |      |      |      |      |      |
|---|----------------------|------|------|------|------|------|
| L | FORK OFFSET          | 1.7  | 1.7  | 1.7  | 1.7  | 1.7  |
| M | STACK                | 24.2 | 24.3 | 24.5 | 24.9 | 25.6 |
| N | REACH                | 17.1 | 18.3 | 19.1 | 20.1 | 20.7 |
| O | FRONT CENTER         | 29.5 | 30.7 | 31.6 | 32.7 | 33.7 |
| P | Vertical Fork Travel | 5.4  | 5.4  | 5.4  | 5.4  | 5.4  |

Geometric Table (mm)

|   |                          | SM   | MD   | LG   | XL   | XXL  |
|---|--------------------------|------|------|------|------|------|
| A | SEAT TUBE LENGTH         | 365  | 400  | 440  | 470  | 485  |
| B | EFFECTIVE TOPTUBE LENGTH | 571  | 602  | 623  | 650  | 670  |
| C | HEADTUBE ANGLE           | 65.4 | 65.4 | 65.4 | 65.4 | 65.4 |
| D | EFF. SEAT TUBE ANGLE     | 77.5 | 77.5 | 77.5 | 77.4 | 77.4 |
| E | ACTUAL SEAT TUBE ANGLE   | 72.2 | 72.6 | 72.8 | 73.2 | 73.7 |
| F | CHAINSTAY LENGTH         | 436  | 438  | 440  | 442  | 444  |
| G | WHEELBASE                | 1184 | 1217 | 1242 | 1273 | 1300 |
| H | ESTIMATED BB HEIGHT      | 339  | 339  | 339  | 339  | 339  |
| I | STANDOVER                | 722  | 729  | 733  | 735  | 740  |
| J | HEADTUBE LENGTH          | 92   | 95   | 100  | 112  | 134  |
| K | FORK AXLE TO CROWN       | 565  | 565  | 565  | 565  | 565  |
| L | FORK OFFSET              | 44   | 44   | 44   | 44   | 44   |
| M | STACK                    | 614  | 617  | 621  | 631  | 651  |
| N | REACH                    | 435  | 465  | 485  | 510  | 525  |
| O | FRONT CENTER             | 748  | 779  | 802  | 831  | 856  |
| P | Vertical Fork Travel     | 136  | 136  | 136  | 136  | 136  |

FIT GUIDE

