


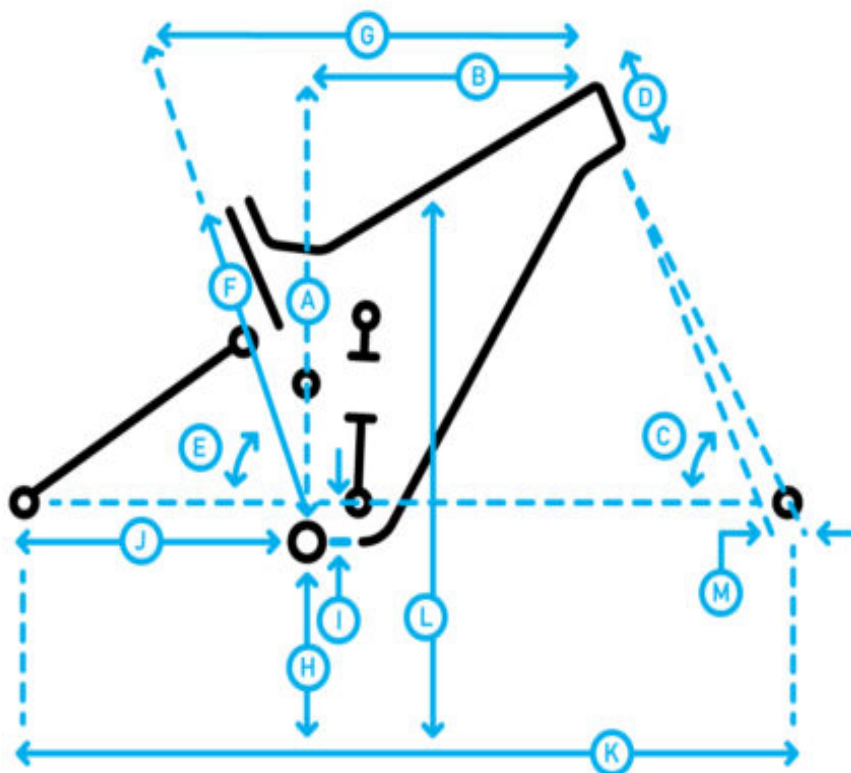

Geometry Chart (MM)

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: High BB/Short CS Headtube Angle: 0° Headset Cup

	S	M	L	XL
A STACK	620.08	633.51	642.6	646.93
B REACH	430	460	490	520
C HEADTUBE ANGLE	63.5°	63.5°	63.5°	63.5°
D HEADTUBE LENGTH	100	115	125	130
E SEATTUBE ANGLE	79.2°	79°	78.8°	78.6°
F SEATTUBE LENGTH	400	420	430	460
G TOPTUBE EFFECTIVE	556	592	626	659
H BB HEIGHT	352	352	352	352
I BB DROP (REAR/FRONT)	7/24	7/24	7/24	7/24
J CHAINSTAY	435	435	435	435
K WHEELBASE	1211.42	1248.11	1282.57	1317.8
L STANDOVER HEIGHT	683.32	689.88	695.6	698.13
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9

	S	M	L	XL
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: High BB/Short CS Headtube Angle: -.75° Headset Cup

	S	M	L	XL
A STACK	617.87	631.56	640.57	645.07
B REACH	430.68	460.18	490.02	519.91
C HEADTUBE ANGLE	62.7°	62.9°	62.9°	62.9°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	554.83	590.11	624.57	657.29
F SEATTUBE ANGLE	79.4°	79.1°	78.9°	78.7°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	351	351	351	351
I BB DROP (REAR/FRONT)	9/26	9/26	9/26	9/26
J CHAINSTAY	435	435	435	435
K WHEELBASE	1220.38	1255.58	1289.48	1321.57
L STANDOVER HEIGHT	682.07	688.93	695.05	697.42
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: High BB/Short CS Headtube Angle: +.75° Headset Cup

	S	M	L	XL
A STACK	622.82	636.16	645.09	649.48
B REACH	428.58	458.88	489	519.23
C HEADTUBE ANGLE	64°	64°	64°	64°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	559	594.21	628.68	661.39
F SEATTUBE ANGLE	79°	78.7°	78.5°	78.4°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	354	354	354	354
I BB DROP (REAR/FRONT)	5/22	5/22	5/22	5/22
J CHAINSTAY	435	435	435	435
K WHEELBASE	1203.81	1241.44	1276.18	1308.98
L STANDOVER HEIGHT	685.12	691.43	696.5	699.36

	S	M	L	XL
M FORK OFFSET	44	44	44	4
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: Low BB/Long CS Headtube Angle: 0° Headset Cup

	S	M	L	XL
A STACK	623.93	637.5	646.6	651.22
B REACH	424.4	454.45	484.52	514.61
C HEADTUBE ANGLE	63°	63°	63°	63°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	557.88	593.17	627.68	660.45
F SEATTUBE ANGLE	78.7°	78.5°	78.3°	78.1°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	345	345	345	345
I BB DROP (REAR/FRONT)	14/31	14/31	14/31	14/31
J CHAINSTAY	442	442	442	442
K WHEELBASE	1218.15	1254.84	12898.3	1321.53
L STANDOVER HEIGHT	676	682.56	687.27	690.58
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: Low BB/Long CS Headtube Angle: -.75° Headset Cup

	S	M	L	XL
A STACK	626.67	640.13	649.23	653.78
B REACH	442.93	453.29	483.48	513.81
C HEADTUBE ANGLE	62.2°	62.4°	62.4°	62.4°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	560.07	595.34	629.87	662.62
F SEATTUBE ANGLE	78.5°	78.3°	78°	77.9°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	347	347	347	346
I BB DROP (REAR/FRONT)	12/29	12/29	13/30	13/30
J CHAINSTAY	442	442	442	442

	S	M	L	XL
K WHEELBASE	1210.58	1248.21	1282.95	1315.75
L STANDOVER HEIGHT	678.11	684.29	688.37	691.73
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 27.5" BB and Chainstay: Low BB/Long CS Headtube Angle: +.75° Headset Cup

	S	M	L	XL
A STACK	621.7	635.54	644.7	649.34
B REACH	425.13	454.67	484.57	514.56
C HEADTUBE ANGLE	63.6°	63.6°	63.6°	63.5°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	555.85	591.2	625.71	658.48
F SEATTUBE ANGLE	78.9°	78.7°	78.4°	78.2°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	343	344	344	344
I BB DROP (REAR/FRONT)	16/33	15/32	15/32	15/32
J CHAINSTAY	442	442	442	442
K WHEELBASE	1227.07	1262.27	1296.19	1328.28
L STANDOVER HEIGHT	674.52	681.33	686.32	689.41
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 29" BB and Chainstay: High BB/Short CS Headtube Angle: +0° Headset Cup

	S	M	L	XL
A STACK	620.08	633.51	642.46	646.93
B REACH	430	460	490	520
C HEADTUBE ANGLE	63.5°	63.5°	63.5°	63.5°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	556.83	592.07	626.52	659.24
F SEATTUBE ANGLE	78.4°	78.2°	78°	77.9°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	352	352	352	352

	S	M	L	XL
I BB DROP	24	24	24	24
J CHAINSTAY	435	435	435	435
K WHEELBASE	1212.66	1249.35	1283.82	1316.05
L STANDOVER HEIGHT	683.32	689.88	695.6	698.13
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 29" BB and Chainstay: High BB/Short CS Headtube Angle: -.75° Headset Cup

	S	M	L	XL
A STACK	617.87	631.56	640.57	645.07
B REACH	430.68	460.18	490.01	519.91
C HEADTUBE ANGLE	63.6°	63.6°	63.6°	63.5°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	554.83	590.11	624.57	657.3
F SEATTUBE ANGLE	78.6°	78.4°	78.1°	78°
G SEATTUBE LENGTH	400	430	430	460
H BB HEIGHT	350	351	351	351
I BB DROP	26	25	25	25
J CHAINSTAY	435	435	435	435
K WHEELBASE	1221.56	1256.77	1290.68	1322.78
L STANDOVER HEIGHT	682.06	688.93	695.05	697.42
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 29" BB and Chainstay: High BB/Short CS Headtube Angle: +.75° Headset Cup

	S	M	L	XL
A STACK	622.82	636.13	645.08	649.48
B REACH	428.57	458.88	489	519.23
C HEADTUBE ANGLE	62.7°	62.9°	62.9°	63°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	558.99	594.21	628.68	661.39
F SEATTUBE ANGLE	78.1°	78°	77.8°	77.7°

	S	M	L	XL
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	354	354	354	354
I BB DROP	22	22	22	22
J CHAINSTAY	435	435	435	435
K WHEELBASE	1205.12	1242.74	1277.49	1310.28
L STANDOVER HEIGHT	685.12	691.46	696.6	699.37
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

Front/Rear Wheels: F: 29"/R: 29" BB and Chainstay: Low BB/Long CS Headtube Angle: +0° Headset Cup

	S	M	L	XL
A STACK	623.96	637.53	646.63	651.25
B REACH	424.36	454.41	484.48	514.57
C HEADTUBE ANGLE	63°	63°	63°	63°
D HEADTUBE LENGTH	100	115	125	130
E TOPTUBE EFFECTIVE	557.89	593.18	627.68	660.45
F SEATTUBE ANGLE	77.9°	77.7°	77.5°	77.4°
G SEATTUBE LENGTH	400	420	430	460
H BB HEIGHT	345	345	345	345
I BB DROP	31.2	31.2	31.2	31.2
J CHAINSTAY	442	442	442	442
K WHEELBASE	1219.07	1255.77	1290.23	1322.46
L STANDOVER HEIGHT	676	682.56	687.27	690.58
M FORK OFFSET	44	44	44	44
SEATPOST DIAMETER	34.9	34.9	34.9	34.9
HANDLEBAR WIDTH	780	780	780	780
STEM LENGTH	35	35	35	35
CRANK LENGTH	160	160	160	160

All lengths in millimeters