


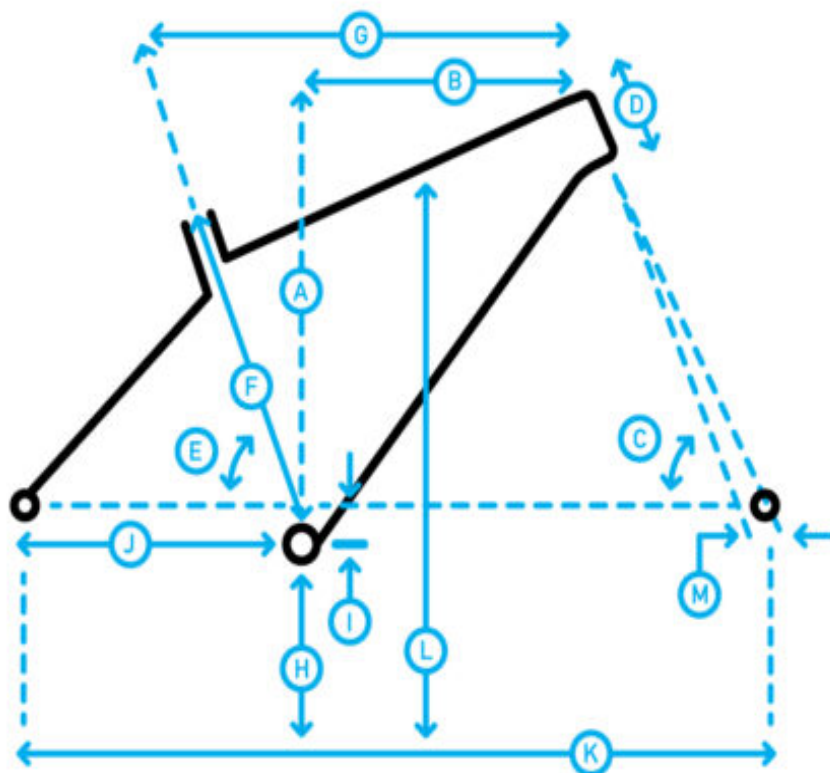

**Geometry Chart (MM)**

|                     | XS    | S     | M (27.5) | M (29) | L     | XL    | XXL   |
|---------------------|-------|-------|----------|--------|-------|-------|-------|
| A Stack             | 586   | 592   | 596      | 622    | 626   | 631   | 640   |
| B Reach             | 420   | 435   | 445      | 445    | 465   | 485   | 505   |
| C Headtube Angle    | 67.5° | 67.5° | 67.5°    | 67°    | 67°   | 67°   | 67°   |
| D Headtube Length   | 100   | 105   | 110      | 110    | 115   | 120   | 130   |
| E Seattube Angle    | 74.5° | 74.5° | 74.5°    | 74.5°  | 74.5° | 74.5° | 74.5° |
| F Seattube Length   | 330   | 381   | 431      | 431    | 481   | 520   | 559   |
| G Toptube Effective | 583   | 599   | 610      | 617    | 639   | 660   | 683   |
| H BB Height         | 307   | 307   | 307      | 311.5  | 311.5 | 311.5 | 311.5 |
| I BB Drop           | 48    | 48    | 48       | 61     | 61    | 61    | 61    |
| J Chainstay         | 438   | 438   | 438      | 455    | 455   | 455   | 455   |
| K Wheelbase         | 1124  | 1141  | 1153     | 1184   | 1206  | 1228  | 1252  |
| L Standover Height  | 619   | 639   | 686      | 699    | 726   | 760   | 790   |
| M Fork Offset       | 42    | 42    | 42       | 46     | 46    | 46    | 46    |
| Seatpost Diameter   | 27.2  | 27.2  | 27.2     | 27.2   | 27.2  | 27.2  | 27.2  |
| Handlebar Width     | 780   | 780   | 780      | 780    | 780   | 780   | 780   |
| Stem Length         | 45    | 45    | 45       | 45     | 45    | 45    | 45    |

|              |           |          |                 |               |          |           |            |
|--------------|-----------|----------|-----------------|---------------|----------|-----------|------------|
|              | <b>XS</b> | <b>S</b> | <b>M (27.5)</b> | <b>M (29)</b> | <b>L</b> | <b>XL</b> | <b>XXL</b> |
| Crank Length | 170       | 170      | 170             | 170           | 170      | 170       | 170        |

All lengths in millimeters