


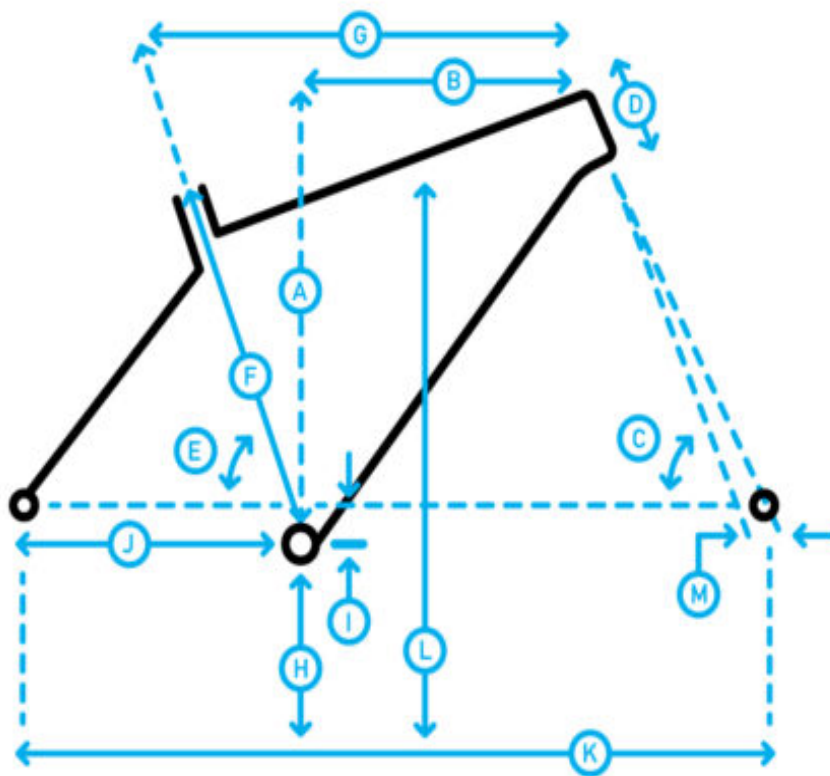

Geometry Chart (MM)

	50	52	54	56	58	60
A Stack	550	564	575	591.5	610.4	620
B Reach	375	375	380	390	402	415
C Headtube Angle	70.5°	71.5°	71°	71.5°	71.5°	71.5°
D Headtube Length	120	135	150	165	180	195
E Seattube Angle	74.5°	74°	74°	74°	74°	73.5°
F Seattube Length	460	480	500	520	540	560
G Toptube Effective	524	538	547	561	577	600
H BB Height	274	274	274	274	274	274
I BB Drop	76	76	76	76	76	76
J Chainstay	430	430	430	430	430	430
K Wheelbase	1016	1016	1024	1040	1056	1075
L Standover Height	720	740	758	777	795	812
M Fork Offset	50	50	50	50	50	50
Seatpost Diameter	27.2	27.2	27.2	27.2	27.2	27.2
Handlebar Width	400	400	420	420	440	440
Stem Length	75	75	90	90	90	90

	50	52	54	56	58	60
Crank Length	170	170	175	175	175	175

All lengths in millimeters