


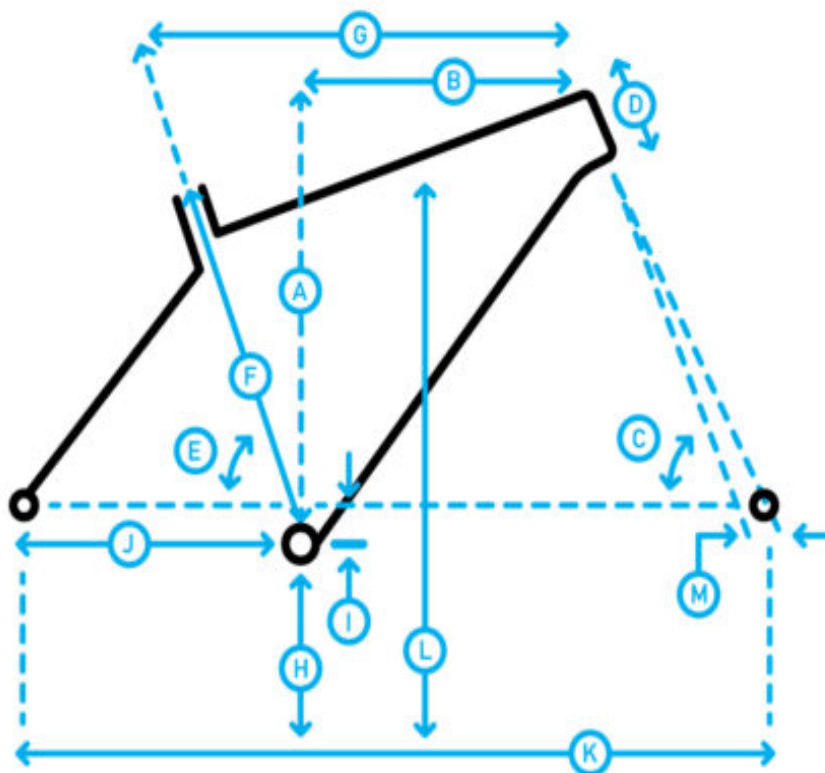

**Geometry Chart (MM)**

|                     | S      | M      | L      | XL     |
|---------------------|--------|--------|--------|--------|
| A Stack             | 628.2  | 646.9  | 665.5  | 679.4  |
| B Reach             | 340    | 355    | 370    | 381.6  |
| C Headtube Angle    | 68.5°  | 68.5°  | 68.5°  | 68.5°  |
| D Headtube Length   | 210    | 230    | 250    | 265    |
| E Seattube Angle    | 67°    | 67°    | 67°    | 67°    |
| F Seattube Length   | 382    | 406    | 444    | 470    |
| G Toptube Effective | 606.7  | 629.6  | 652.5  | 670    |
| H BB Height         | 276.5  | 276.5  | 276.5  | 276.5  |
| I BB Drop           | 68     | 68     | 68     | 68     |
| J Chainstay         | 490    | 490    | 490    | 490    |
| K Wheelbase         | 1089   | 1111   | 1134   | 1151   |
| L Standover Height  | 618.44 | 618.48 | 674.72 | 675.89 |
| M Fork Offset       | 40     | 40     | 40     | 40     |
| Seatpost Diameter   | 30.9   | 30.9   | 30.9   | 30.9   |
| Handlebar Width     | 700    | 700    | 700    | 700    |
| Stem Length         | 45     | 45     | 45     | 45     |

|              |          |          |          |           |
|--------------|----------|----------|----------|-----------|
|              | <b>S</b> | <b>M</b> | <b>L</b> | <b>XL</b> |
| Crank Length | 170      | 170      | 170      | 170       |

All lengths in millimeters