


2026 Enve Mog - Foundation Force XPLR - Geometrical Chart

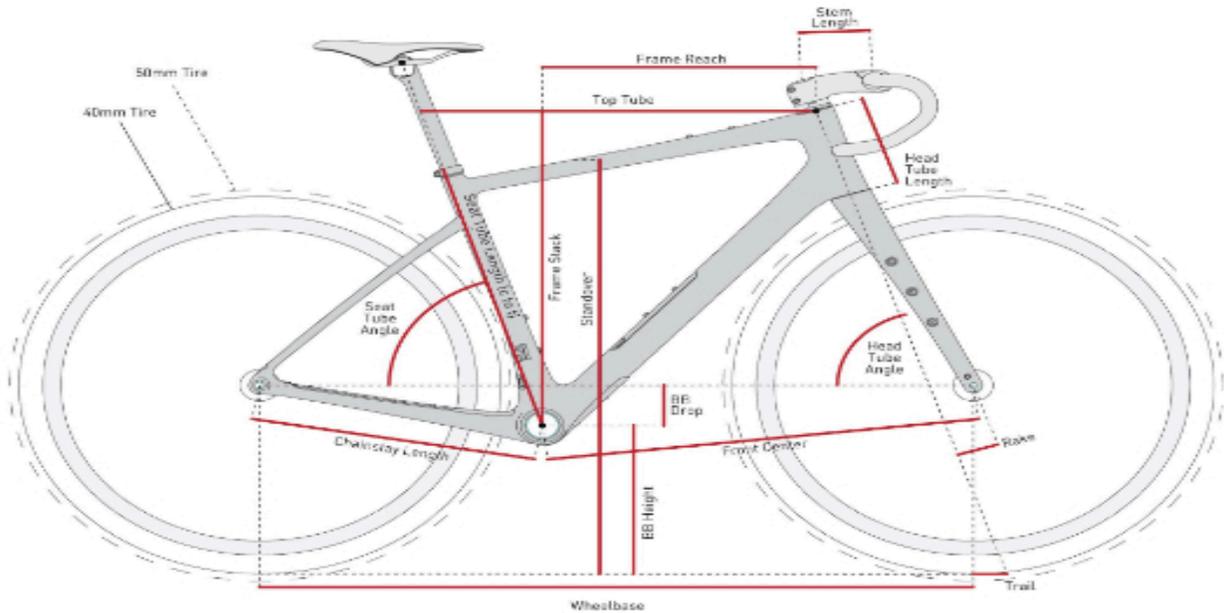

MOG GEOMETRY CHART

	49	52	54	56	58	60
Reach	367	378	389	397	405	415
Stack	520	543	565	587	605	630
Top Tube	511	534	554	571	588	611
Fork Rake	57	57	55	55	53	53
Seat Tube Length (c to top)	439	459	480	500	518	540
Max Saddle Rail Height (w/ 400mm post)	764	784	805	825	843	865
Max Saddle Height (w/ ENVE SLR Saddle)	800	820	841	861	879	901
Seat Tube Angle	74.5	74	73.75	73.5	73.2	72.75
Head Tube Angle	71	71	71.25	71.25	71.5	71.5
Head Tube Length	92	117	140	163	183	209
BB Drop	77	77	75	75	73	73
Chainstay Length	420	420	420	420	420	420
Wheel Base	993	1012	1027	1042	1053	1071
Front Center	580	599	613	629	639	657
Rear Center	412.9	412.9	413.2	413.2	413.6	413.6
BB Height (50mm tire)	289	289	291	291	293	293
BB Height (44mm tire)	279	279	281	281	283	283
BB Height (40mm tire)	277	277	279	279	281	281
BB Height (35mm tire)	273	273	275	275	277	277
Standover (50mm tire)	714	734	756	776	796	819
Standover (44mm tire)	705	725	747	767	787	809
Standover (40mm tire)	702	722	744	764	784	807
Standover (35mm tire)	698	718	740	760	780	803
Trail (50mm tire)	65.5	65.6	66	66	66.4	66.4
Trail (44mm tire)	62.3	62.3	62.8	62.8	63.2	63.2
Trail (40mm tire)	61.4	61.4	61.9	61.9	62.4	62.4
Trail (35mm tire)	60.1	60.1	60.6	60.6	61.1	61.1