


# 2026 Scott Addict Gravel 40 Bike - Geometry

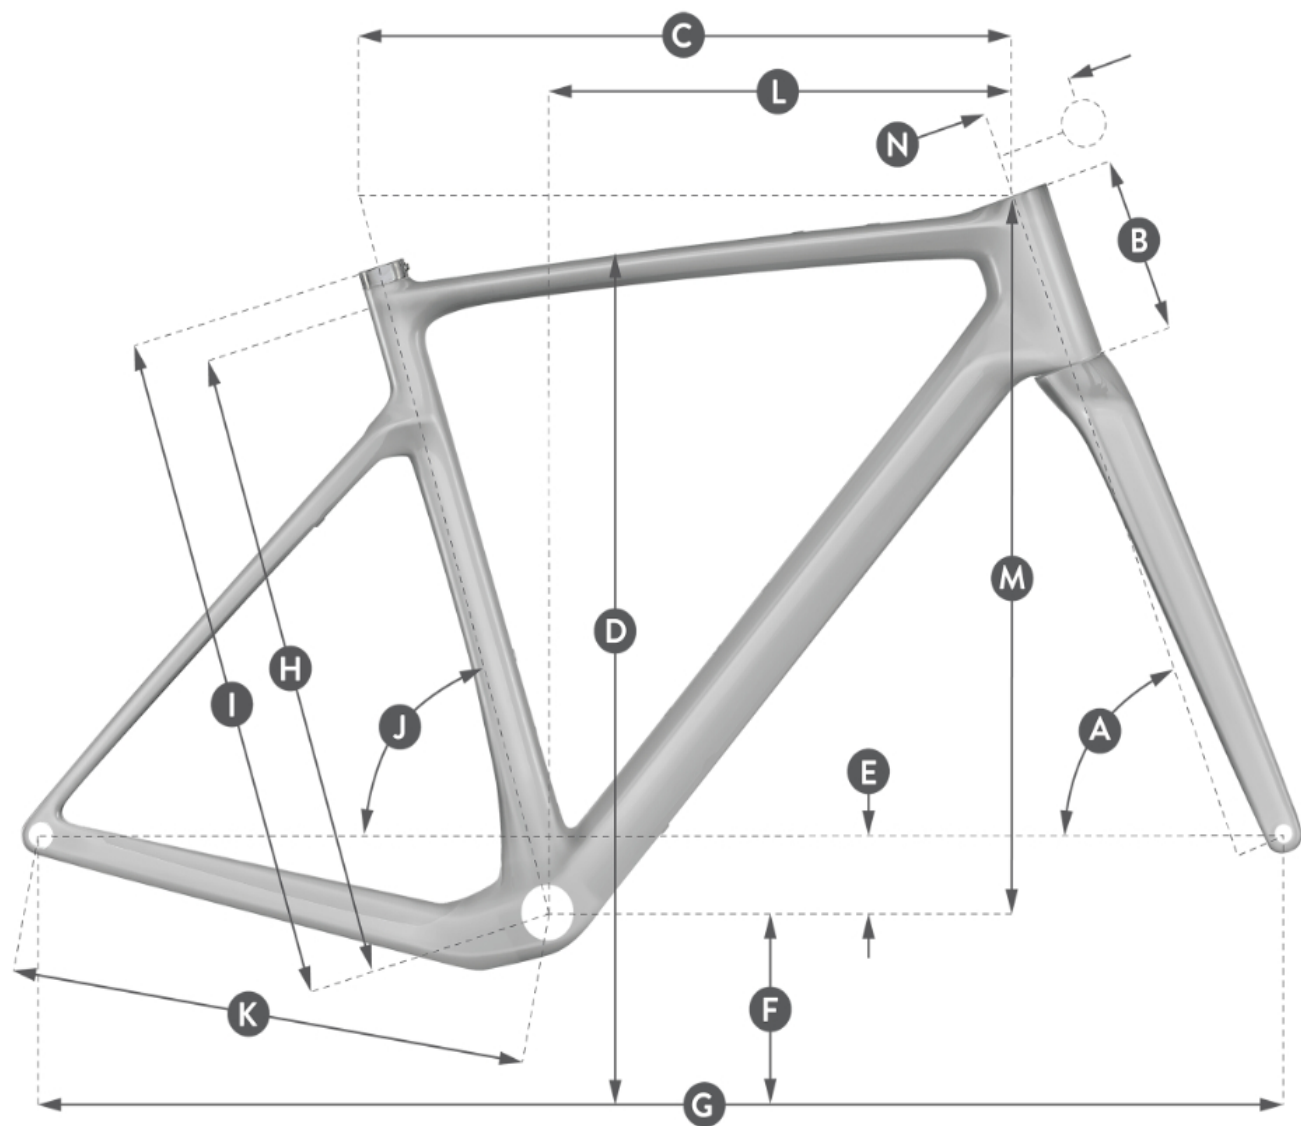

Geometrical Chart in MM

|   |                                                           | XS/49      | S/52       | M/54       | L/56       | XL/58      |
|---|-----------------------------------------------------------|------------|------------|------------|------------|------------|
| A | head tube angle / angle tube de direction                 | 70.0 °     | 70.0 °     | 71.0 °     | 71.0 °     | 71.0 °     |
| B | head tube length / hauteur tube de direction              | 95.0 mm    | 122.0 mm   | 140.0 mm   | 166.0 mm   | 187.0 mm   |
| C | top tube horizontal / longueur horizontale tube supérieur | 518.0 mm   | 534.5 mm   | 554.5 mm   | 578.5 mm   | 592.5 mm   |
| D | standover height / hauteur entre-jambes                   | 759.0 mm   | 786.0 mm   | 807.0 mm   | 828.0 mm   | 847.0 mm   |
| E | BB offset / deport axe de pédalier                        | -71.0 mm   | -71.0 mm   | -71.0 mm   | -71.0 mm   | -71.0 mm   |
| F | BB height / hauteur axe de pédalier                       | 283.0 mm   | 283.0 mm   | 283.0 mm   | 283.0 mm   | 283.0 mm   |
| G | wheel base / entraxe roues                                | 1,009.4 mm | 1,022.9 mm | 1,029.2 mm | 1,048.7 mm | 1,063.5 mm |

|   |                                                                     |          |          |          |          |          |
|---|---------------------------------------------------------------------|----------|----------|----------|----------|----------|
| H | BB center to toptube center / dist. boitier - milieu tube supérieur | 447.0 mm | 477.0 mm | 498.0 mm | 516.0 mm | 536.0 mm |
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 477.0 mm | 507.0 mm | 528.0 mm | 546.0 mm | 566.0 mm |
| J | seat angle / angle tube de selle                                    | 74.5 °   | 74.0 °   | 73.5 °   | 73.0 °   | 73.0 °   |
| K | chainstay / longueur des bases                                      | 425.0 mm | 425.0 mm | 425.0 mm | 425.0 mm | 425.0 mm |
| L | reach / reach                                                       | 374.1 mm | 378.4 mm | 387.1 mm | 398.2 mm | 406.1 mm |
| M | stack / stack                                                       | 519.0 mm | 544.4 mm | 565.3 mm | 589.9 mm | 609.7 mm |
| N | stem length / longueur potence                                      | 83.0 mm  | 93.0 mm  | 103.0 mm | 103.0 mm | 113.0 mm |

## Geometrical Chart in Inches

|   |                                                                     | <b>XS/49</b> | <b>S/52</b> | <b>M/54</b> | <b>L/56</b> | <b>XL/58</b> |
|---|---------------------------------------------------------------------|--------------|-------------|-------------|-------------|--------------|
| A | head tube angle / angle tube de direction                           | 70.0 °       | 70.0 °      | 71.0 °      | 71.0 °      | 71.0 °       |
| B | head tube length / hauteur tube de direction                        | 3.7 in       | 4.8 in      | 5.5 in      | 6.5 in      | 7.4 in       |
| C | top tube horizontal / longueur horizontale tube supérieur           | 20.4 in      | 21.0 in     | 21.8 in     | 22.8 in     | 23.3 in      |
| D | standover height / hauteur entre-jambes                             | 29.9 in      | 30.9 in     | 31.8 in     | 32.6 in     | 33.3 in      |
| E | BB offset / deport axe de pédalier                                  | -2.8 in      | -2.8 in     | -2.8 in     | -2.8 in     | -2.8 in      |
| F | BB height / hauteur axe de pédalier                                 | 11.1 in      | 11.1 in     | 11.1 in     | 11.1 in     | 11.1 in      |
| G | wheel base / entraxe roues                                          | 39.7 in      | 40.3 in     | 40.5 in     | 41.3 in     | 41.9 in      |
| H | BB center to toptube center / dist. boitier - milieu tube supérieur | 17.6 in      | 18.8 in     | 19.6 in     | 20.3 in     | 21.1 in      |
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 18.8 in      | 20.0 in     | 20.8 in     | 21.5 in     | 22.3 in      |
| J | seat angle / angle tube de selle                                    | 74.5 °       | 74.0 °      | 73.5 °      | 73.0 °      | 73.0 °       |
| K | chainstay / longueur des bases                                      | 16.7 in      | 16.7 in     | 16.7 in     | 16.7 in     | 16.7 in      |
| L | reach / reach                                                       | 14.7 in      | 14.9 in     | 15.2 in     | 15.7 in     | 16.0 in      |
| M | stack / stack                                                       | 20.4 in      | 21.4 in     | 22.3 in     | 23.2 in     | 24.0 in      |
| N | stem length / longueur potence                                      | 3.3 in       | 3.7 in      | 4.1 in      | 4.1 in      | 4.4 in       |