


2026 Scott Fastlane Premium Bike - Chrome Silver - Geometry

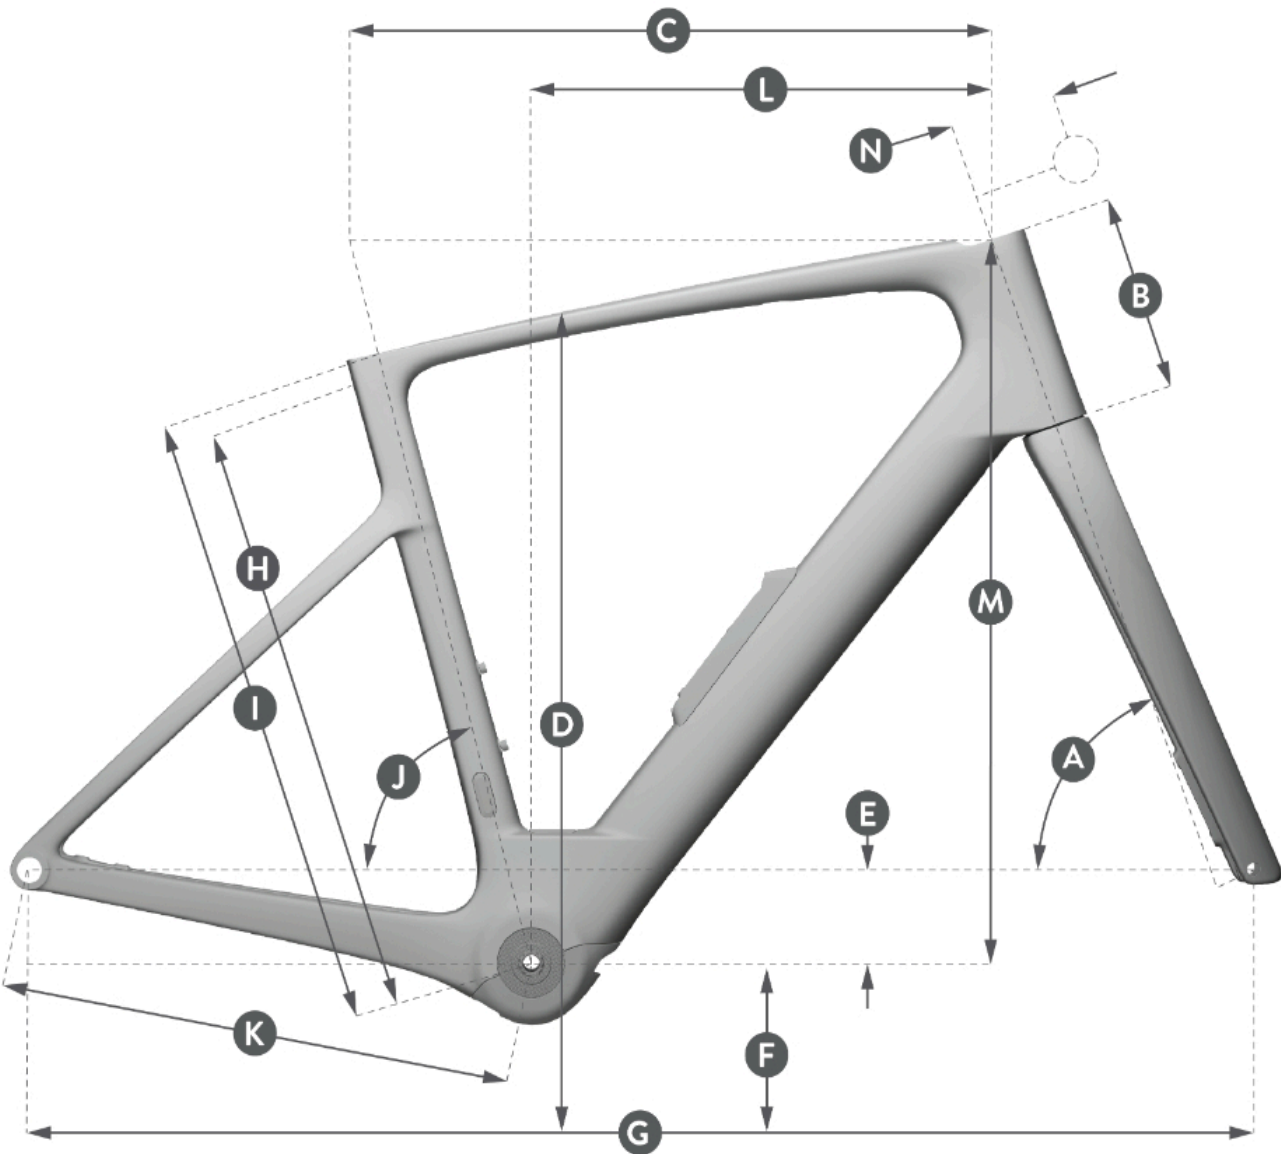

Geometrical Chart in MM

		XS/49	S/52	M/54	L/56	XL/58
A	head tube angle / angle tube de direction	71.8 °	72.0 °	72.2 °	72.5 °	73.0 °
B	head tube length / hauteur tube de direction	115.0 mm	139.0 mm	161.0 mm	182.0 mm	201.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	521.0 mm	536.0 mm	551.0 mm	566.0 mm	582.0 mm
D	standover height / hauteur entre-jambes	758.0 mm	780.0 mm	802.0 mm	823.0 mm	849.0 mm
E	BB offset / deport axe de pédalier	-75.0 mm	-75.0 mm	-75.0 mm	-75.0 mm	-75.0 mm
F	BB height / hauteur axe de pédalier	274.0 mm	274.0 mm	274.0 mm	274.0 mm	274.0 mm

G	wheel base / entraxe roues	991.0 mm	1,000.0 mm	1,009.0 mm	1,016.0 mm	1,022.0 mm
H	BB center to toptube center / dist. boitier - milieu tube supérieur	448.0 mm	468.0 mm	490.0 mm	514.0 mm	545.0 mm
I	BB center to top of seattube / dist. boitier - sommet tube de selle	458.0 mm	478.0 mm	500.0 mm	524.0 mm	555.0 mm
J	seat angle / angle tube de selle	75.0 °	74.5 °	74.0 °	73.5 °	73.1 °
K	chainstay / longueur des bases	420.0 mm	420.0 mm	420.0 mm	420.0 mm	420.0 mm
L	reach / reach	378.0 mm	381.0 mm	385.0 mm	388.0 mm	392.0 mm
M	stack / stack	535.0 mm	559.0 mm	580.0 mm	602.0 mm	622.0 mm
N	stem length / longueur potence	80.0 mm	80.0 mm	100.0 mm	100.0 mm	110.0 mm
O	handlebar width / largeur du guidon	380.0 mm	380.0 mm	400.0 mm	400.0 mm	400.0 mm
P	cockpit reach / reach du cockpit	532.0 mm	535.0 mm	558.0 mm	562.0 mm	576.0 mm
Q	cockpit min. stack / hauteur minimale du cockpit	586.0 mm	608.0 mm	631.0 mm	652.0 mm	673.0 mm
R	crank arm length / longueur de manivelle	165.0 mm	165.0 mm	170.0 mm	170.0 mm	170.0 mm
S	fork offset / déport fourche	47.0 mm	47.0 mm	47.0 mm	47.0 mm	47.0 mm

Geometrical Chart in Inches

		XS/49	S/52	M/54	L/56	XL/58
A	head tube angle / angle tube de direction	71.8 °	72.0 °	72.2 °	72.5 °	73.0 °
B	head tube length / hauteur tube de direction	4.5 in	5.5 in	6.3 in	7.2 in	7.9 in
C	top tube horizontal / longueur horizontale tube supérieur	20.5 in	21.1 in	21.7 in	22.3 in	22.9 in
D	standover height / hauteur entre-jambes	29.8 in	30.7 in	31.6 in	32.4 in	33.4 in
E	BB offset / deport axe de pédalier	-3.0 in	-3.0 in	-3.0 in	-3.0 in	-3.0 in
F	BB height / hauteur axe de pédalier	10.8 in	10.8 in	10.8 in	10.8 in	10.8 in
G	wheel base / entraxe roues	39.0 in	39.4 in	39.7 in	40.0 in	40.2 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur	17.6 in	18.4 in	19.3 in	20.2 in	21.5 in
I	BB center to top of seattube / dist. boitier - sommet tube de selle	18.0 in	18.8 in	19.7 in	20.6 in	21.9 in
J	seat angle / angle tube de selle	75.0 °	74.5 °	74.0 °	73.5 °	73.1 °
K	chainstay / longueur des bases	16.5 in	16.5 in	16.5 in	16.5 in	16.5 in
L	reach / reach	14.9 in	15.0 in	15.2 in	15.3 in	15.4 in
M	stack / stack	21.1 in	22.0 in	22.8 in	23.7 in	24.5 in
N	stem length / longueur potence	3.1 in	3.1 in	3.9 in	3.9 in	4.3 in
O	handlebar width / largeur du guidon	15.0 in	15.0 in	15.7 in	15.7 in	15.7 in
P	cockpit reach / reach du cockpit	20.9 in	21.1 in	22.0 in	22.1 in	22.7 in

Q	cockpit min. stack / hauteur minimale du cockpit	23.1 in	23.9 in	24.8 in	25.7 in	26.5 in
R	crank arm length / longueur de manivelle	6.5 in	6.5 in	6.7 in	6.7 in	6.7 in
S	fork offset / déport fourche	1.9 in	1.9 in	1.9 in	1.9 in	1.9 in