


## 2026 Scott Foil RC 30 Bike - Geometry

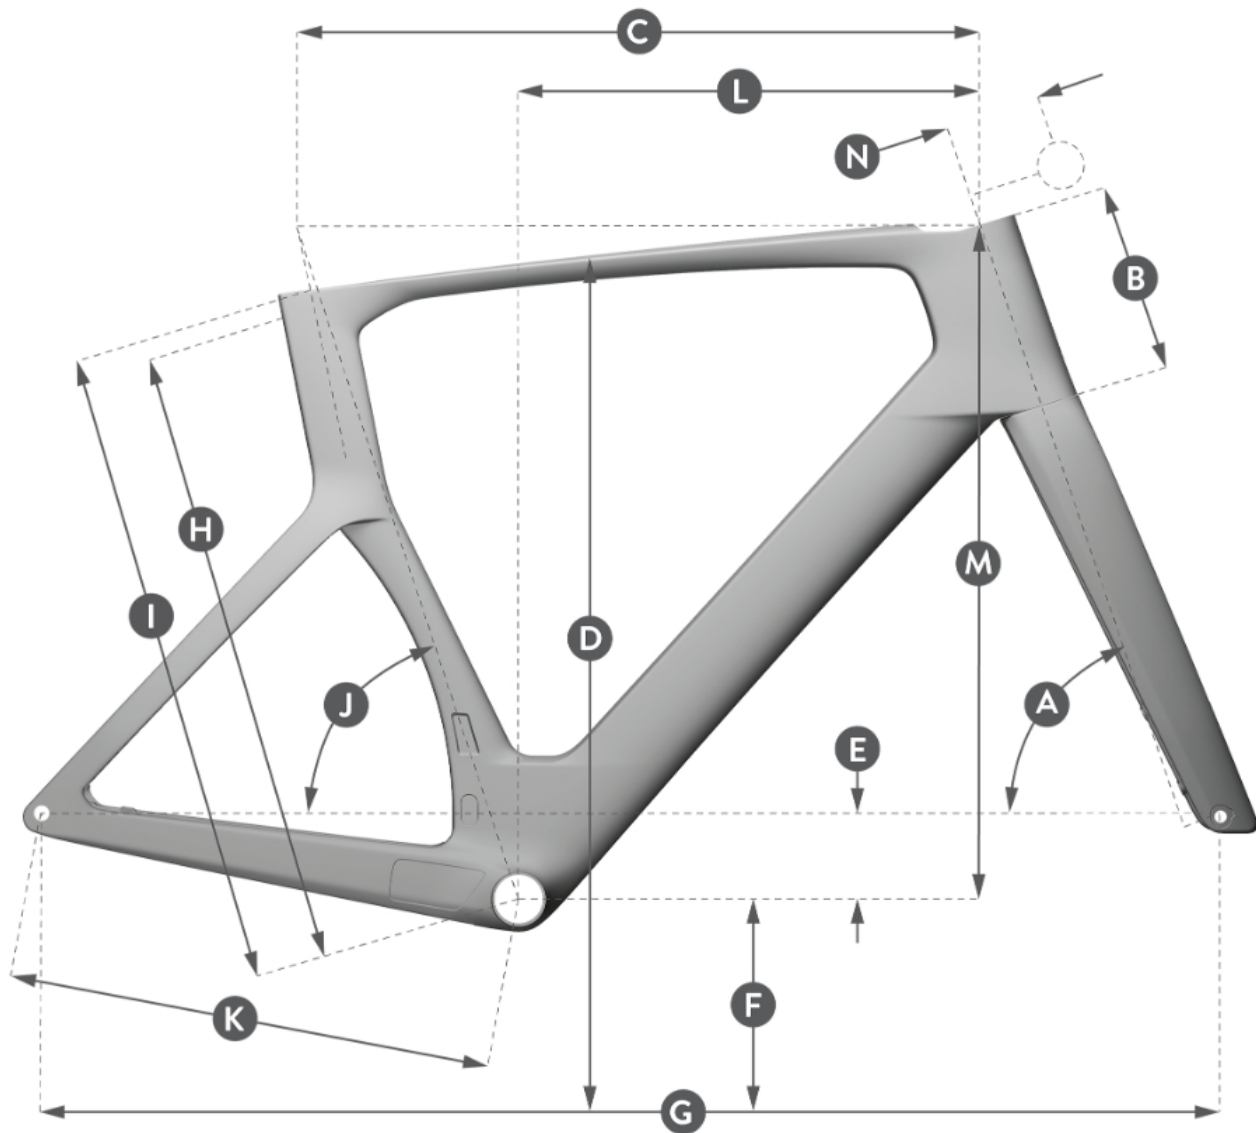

## Geometrical Chart in MM

[illegible]

|   |                                                                     |          |          |          |          |          |            |            |
|---|---------------------------------------------------------------------|----------|----------|----------|----------|----------|------------|------------|
| F | BB height / hauteur axe de pédalier                                 | 274.5 mm | 274.5 mm | 274.5 mm | 274.5 mm | 274.5 mm | 274.5 mm   | 274.5 mm   |
| G | wheel base / entraxe roues                                          | 987.7 mm | 993.7 mm | 990.7 mm | 992.6 mm | 999.9 mm | 1,008.6 mm | 1,022.7 mm |
| H | BB center to toptube center / dist. boitier - milieu tube supérieur | 450.8 mm | 480.9 mm | 501.4 mm | 521.6 mm | 541.4 mm | 558.8 mm   | 571.4 mm   |
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 451.8 mm | 481.9 mm | 502.4 mm | 522.6 mm | 542.4 mm | 559.8 mm   | 572.4 mm   |
| J | seat angle / angle tube de selle                                    | 74.5 °   | 74.5 °   | 74.0 °   | 73.6 °   | 73.3 °   | 73.0 °     | 72.5 °     |
| K | chainstay / longueur des bases                                      | 412.0 mm | 412.0 mm | 412.0 mm | 412.0 mm | 412.0 mm | 412.0 mm   | 412.0 mm   |
| L | reach / reach                                                       | 380.0 mm | 388.0 mm | 389.0 mm | 389.0 mm | 394.5 mm | 400.0 mm   | 409.0 mm   |
| M | stack / stack                                                       | 505.0 mm | 511.0 mm | 527.0 mm | 548.0 mm | 568.0 mm | 589.0 mm   | 606.0 mm   |
| N | stem length / longueur potence                                      | 80.0 mm  | 90.0 mm  | 100.0 mm | 110.0 mm | 110.0 mm | 120.0 mm   | 120.0 mm   |

## Geometrical Chart in Inches

|   |                                                                     | <b>XXS/47</b> | <b>XS/49</b> | <b>S/52</b> | <b>M/54</b> | <b>L/56</b> | <b>XL/58</b> | <b>XXL/61</b> |
|---|---------------------------------------------------------------------|---------------|--------------|-------------|-------------|-------------|--------------|---------------|
| A | head tube angle / angle tube de direction                           | 70.5 °        | 71.0 °       | 72.0 °      | 72.5 °      | 73.0 °      | 73.3 °       | 73.3 °        |
| B | head tube length / hauteur tube de direction                        | 4.1 in        | 4.3 in       | 4.8 in      | 5.6 in      | 6.3 in      | 7.1 in       | 7.8 in        |
| C | top tube horizontal / longueur horizontale tube supérieur           | 20.5 in       | 20.9 in      | 21.3 in     | 21.7 in     | 22.2 in     | 22.8 in      | 23.6 in       |
| D | standover height / hauteur entre-jambes                             | 29.4 in       | 29.9 in      | 30.7 in     | 31.5 in     | 32.3 in     | 33.0 in      | 33.6 in       |
| E | BB offset / deport axe de pédalier                                  | -2.8 in       | -2.8 in      | -2.8 in     | -2.8 in     | -2.8 in     | -2.8 in      | -2.8 in       |
| F | BB height / hauteur axe de pédalier                                 | 10.8 in       | 10.8 in      | 10.8 in     | 10.8 in     | 10.8 in     | 10.8 in      | 10.8 in       |
| G | wheel base / entraxe roues                                          | 38.9 in       | 39.1 in      | 39.0 in     | 39.1 in     | 39.4 in     | 39.7 in      | 40.3 in       |
| H | BB center to toptube center / dist. boitier - milieu tube supérieur | 17.7 in       | 18.9 in      | 19.7 in     | 20.5 in     | 21.3 in     | 22.0 in      | 22.5 in       |
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 17.8 in       | 19.0 in      | 19.8 in     | 20.6 in     | 21.4 in     | 22.0 in      | 22.5 in       |
| J | seat angle / angle tube de selle                                    | 74.5 °        | 74.5 °       | 74.0 °      | 73.6 °      | 73.3 °      | 73.0 °       | 72.5 °        |
| K | chainstay / longueur des bases                                      | 16.2 in       | 16.2 in      | 16.2 in     | 16.2 in     | 16.2 in     | 16.2 in      | 16.2 in       |
| L | reach / reach                                                       | 15.0 in       | 15.3 in      | 15.3 in     | 15.3 in     | 15.5 in     | 15.7 in      | 16.1 in       |
| M | stack / stack                                                       | 19.9 in       | 20.1 in      | 20.7 in     | 21.6 in     | 22.4 in     | 23.2 in      | 23.9 in       |
| N | stem length / longueur potence                                      | 3.1 in        | 3.5 in       | 3.9 in      | 4.3 in      | 4.3 in      | 4.7 in       | 4.7 in        |