


2026 Scott Gambler 10 Bike - Carbon Black/Crackle Bronze - Geometry

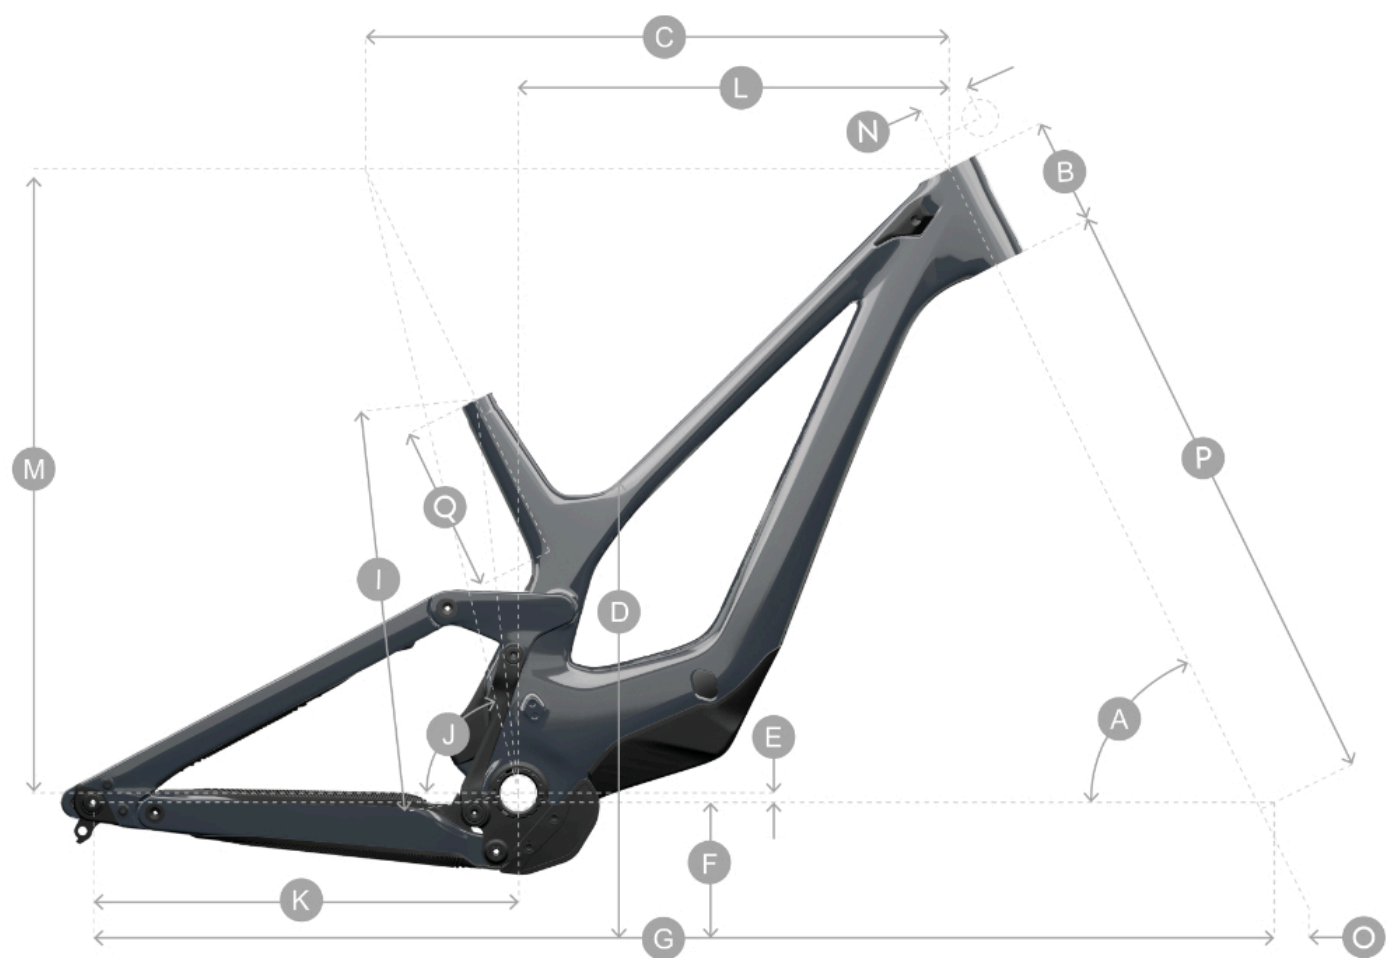

Geometrical Chart in MM

		M	M	L	L	XL	XL
LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute		
A	head tube angle / angle tube de direction	62.5 °	63.5 °	62.5 °	63.5 °	62.5 °	63.5 °
B	head tube length / hauteur tube de direction	110.0 mm	110.0 mm	110.0 mm	110.0 mm	110.0 mm	110.0 mm

C	top tube horizontal / longueur horizontale tube supérieur	608.0 mm	602.0 mm	633.0 mm	627.0 mm	658.0 mm	652.0 mm
D	standover height / hauteur entre-jambes	312.0 mm	312.0 mm	312.0 mm	312.0 mm	312.0 mm	312.0 mm
E	BB offset / deport axe de pédalier	-14.0 mm	1.5 mm	-14.0 mm	1.5 mm	-14.0 mm	1.5 mm
F	BB height / hauteur axe de pédalier	345.0 mm	361.0 mm	345.0 mm	361.0 mm	345.0 mm	361.0 mm
G	wheel base / entraxe roues	1,278.0 mm	1,275.0 mm	1,303.0 mm	1,300.0 mm	1,328.0 mm	1,325.0 mm
H	BB center to toptube center / dist. boîtier - milieu tube supérieur						
I	BB center to top of seattube / dist. boîtier - sommet tube de selle	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm
J	seat angle / angle tube de selle	76.0 °	77.0 °	76.0 °	77.0 °	76.0 °	77.0 °
K	chainstay / longueur des bases	464.0 mm	460.0 mm	464.0 mm	460.0 mm	464.0 mm	460.0 mm
L	reach / reach	433.0 mm	445.0 mm	458.0 mm	470.0 mm	483.0 mm	495.0 mm
M	stack / stack	648.0 mm	639.0 mm	648.0 mm	639.0 mm	648.0 mm	639.0 mm
N	stem length / longueur potence	40.0 mm	40.0 mm	40.0 mm	40.0 mm		
O	trail / chasse au sol	611.0 mm	129.0 mm	137.0 mm	129.0 mm	137.0 mm	
P	fork length / longueur fourche	165.0 mm	611.0 mm	611.0 mm	611.0 mm	611.0 mm	129.0 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	165.0 mm	165.0 mm	165.0 mm	165.0 mm	165.0 mm	611.0 mm
R	Crank Length / longueur de manivelle	165.0 mm	170.0 mm	170.0 mm	170.0 mm	165.0 mm	

Geometrical Chart in Inches

		M	M	L	L	XL	XL
--	--	----------	----------	----------	----------	-----------	-----------

LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute		
A	head tube angle / angle tube de direction	62.5 °	63.5 °	62.5 °	63.5 °	62.5 °	63.5 °
B	head tube length / hauteur tube de direction	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in
C	top tube horizontal / longueur horizontale tube supérieur	23.9 in	23.7 in	24.9 in	24.7 in	25.9 in	25.7 in
D	standover height / hauteur entre-jambes	12.3 in	12.3 in	12.3 in	12.3 in	12.3 in	12.3 in
E	BB offset / deport axe de pédalier	-0.6 in	0.1 in	-0.6 in	0.1 in	-0.6 in	0.1 in
F	BB height / hauteur axe de pédalier	13.6 in	14.2 in	13.6 in	14.2 in	13.6 in	14.2 in
G	wheel base / entraxe roues	50.3 in	50.2 in	51.3 in	51.2 in	52.3 in	52.2 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur						
I	BB center to top of seattube / dist. boitier - sommet tube de selle	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in
J	seat angle / angle tube de selle	76.0 °	77.0 °	76.0 °	77.0 °	76.0 °	77.0 °
K	chainstay / longueur des bases	18.3 in	18.1 in	18.3 in	18.1 in	18.3 in	18.1 in
L	reach / reach	17.0 in	17.5 in	18.0 in	18.5 in	19.0 in	19.5 in
M	stack / stack	25.5 in	25.2 in	25.5 in	25.2 in	25.5 in	25.2 in
N	stem length / longueur potence	1.6 in	1.6 in	1.6 in	1.6 in		
O	trail / chasse au sol	24.1 in	5.1 in	5.4 in	5.1 in	5.4 in	
P	fork length / longueur fourche	24.1 in	24.1 in	24.1 in	24.1 in		
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	6.5 in	6.5 in	6.5 in	6.5 in		

R	Crank Length / longueur de manivelle	6.5 in	6.7 in	6.7 in	6.7 in	
---	--	--------	--------	--------	--------	--