


2026 Scott Gambler 20 Bike - Alloy Silver - Geometry

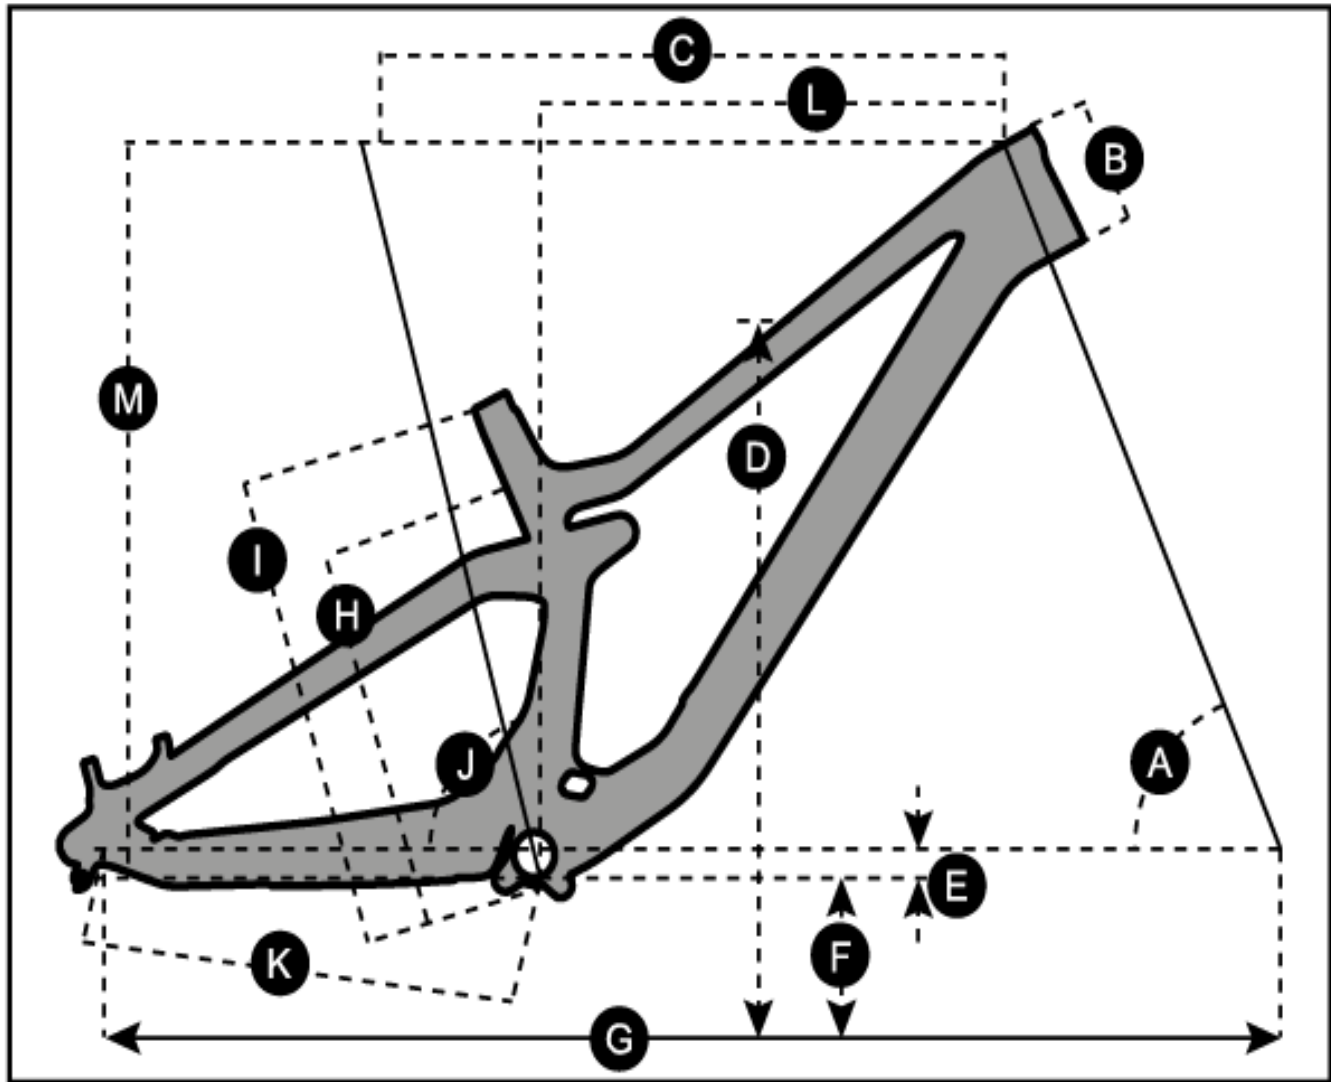

GAMBLER

Geometrical Chart in MM

[illegible]

	hauteur tube de direction								
C	top tube horizontal / longueur horizontale tube supérieur	537.4 mm	535.7 mm	567.5 mm	565.7 mm	621.0 mm	618.9 mm	651.1 mm	648.9 mm
D	standover height / hauteur entre- jambes	719.3 mm	712.3 mm	711.6 mm	705.0 mm	712.1 mm	705.8 mm	709.6 mm	703.6 mm
E	BB offset / deport axe de pédalier	-24.2 mm	-8.5 mm	-24.2 mm	-8.5 mm	-24.2 mm	-8.5 mm	-24.2 mm	-8.5 mm
F	BB height / hauteur axe de pédalier	346.4 mm	342.6 mm	346.0 mm	342.6 mm	345.4 mm	342.6 mm	346.2 mm	342.6 mm
G	wheel base / entraxe roues	1,207.6 mm	1,212.8 mm	1,237.6 mm	1,242.8 mm	1,270.0 mm	1,272.8 mm	1,297.6 mm	1,302.8 mm
H	BB center to toptube center / dist. boitier - milieu tube supérieur								
I	BB center to top of seattube / dist. boitier - sommet tube de selle	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm	405.0 mm
J	seat angle / angle tube de selle	66.8 °	67.2 °	66.8 °	67.2 °	63.8 °	64.2 °	63.8 °	64.2 °
K	chainstay / longueur des bases	438.7 mm	435.0 mm	438.7 mm	435.0 mm	438.7 mm	435.0 mm	438.7 mm	435.0 mm
L	reach / reach	400.2 mm	405.0 mm	430.3 mm	435.0 mm	460.4 mm	465.0 mm	490.5 mm	495.0 mm
M	stack / stack	636.2 mm	631.3 mm	636.2 mm	631.3 mm	633.5 mm	631.3 mm	636.2 mm	631.3 mm
N	stem length / longueur potence	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm	50.0 mm
trail / chasse au sol	130.5 mm	119.0 mm	130.5 mm	119.0 mm	130.5 mm	119.0 mm	130.5 mm	119.0 mm	

Geometrical Chart in Inches

		S / 900	S / 700	M / 900	M / 700	L / 900	L / 700	XL / 900	XL / 700
LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute	LOW BB Setting / position de boitier Basse	High BB Setting / position de boitier haute		
A	head tube angle / angle tube de direction	62.9 °	63.2 °	62.9 °	63.2 °	62.9 °	63.2 °	62.9 °	63.2 °
B	head tube length / hauteur tube de direction	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in	4.3 in
C	top tube horizontal / longueur horizontale tube supérieur	21.2 in	21.1 in	22.3 in	22.3 in	24.4 in	24.4 in	25.6 in	25.5 in
D	standover height / hauteur entre-jambes	28.3 in	28.0 in	28.0 in	27.8 in	28.0 in	27.8 in	27.9 in	27.7 in
E	BB offset / deport axe de pédalier	-1.0 in	-0.3 in	-1.0 in	-0.3 in	-1.0 in	-0.3 in	-1.0 in	-0.3 in
F	BB height / hauteur axe de pédalier	13.6 in	13.5 in	13.6 in	13.5 in	13.6 in	13.5 in	13.6 in	13.5 in
G	wheel base / entraxe roues	47.5 in	47.7 in	48.7 in	48.9 in	50.0 in	50.1 in	51.1 in	51.3 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur								
I	BB center to top of seattube / dist. boitier - sommet tube de selle	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in	15.9 in
J	seat angle / angle tube de selle	66.8 °	67.2 °	66.8 °	67.2 °	63.8 °	64.2 °	63.8 °	64.2 °

K	chainstay / longueur des bases	17.3 in	17.1 in	17.3 in	17.1 in	17.3 in	17.1 in	17.3 in	17.1 in
L	reach / reach	15.8 in	15.9 in	16.9 in	17.1 in	18.1 in	18.3 in	19.3 in	19.5 in
M	stack / stack	25.0 in	24.9 in	25.0 in	24.9 in	24.9 in	24.9 in	25.0 in	24.9 in
N	stem length / longueur potence	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in	2.0 in
trail / chasse au sol	5.1 in	4.7 in	5.1 in	4.7 in	5.1 in	4.7 in	5.1 in	4.7 in	