


2026 Scott Lumen 905 Bike - Cumulus White/Carbon Black - Geometry

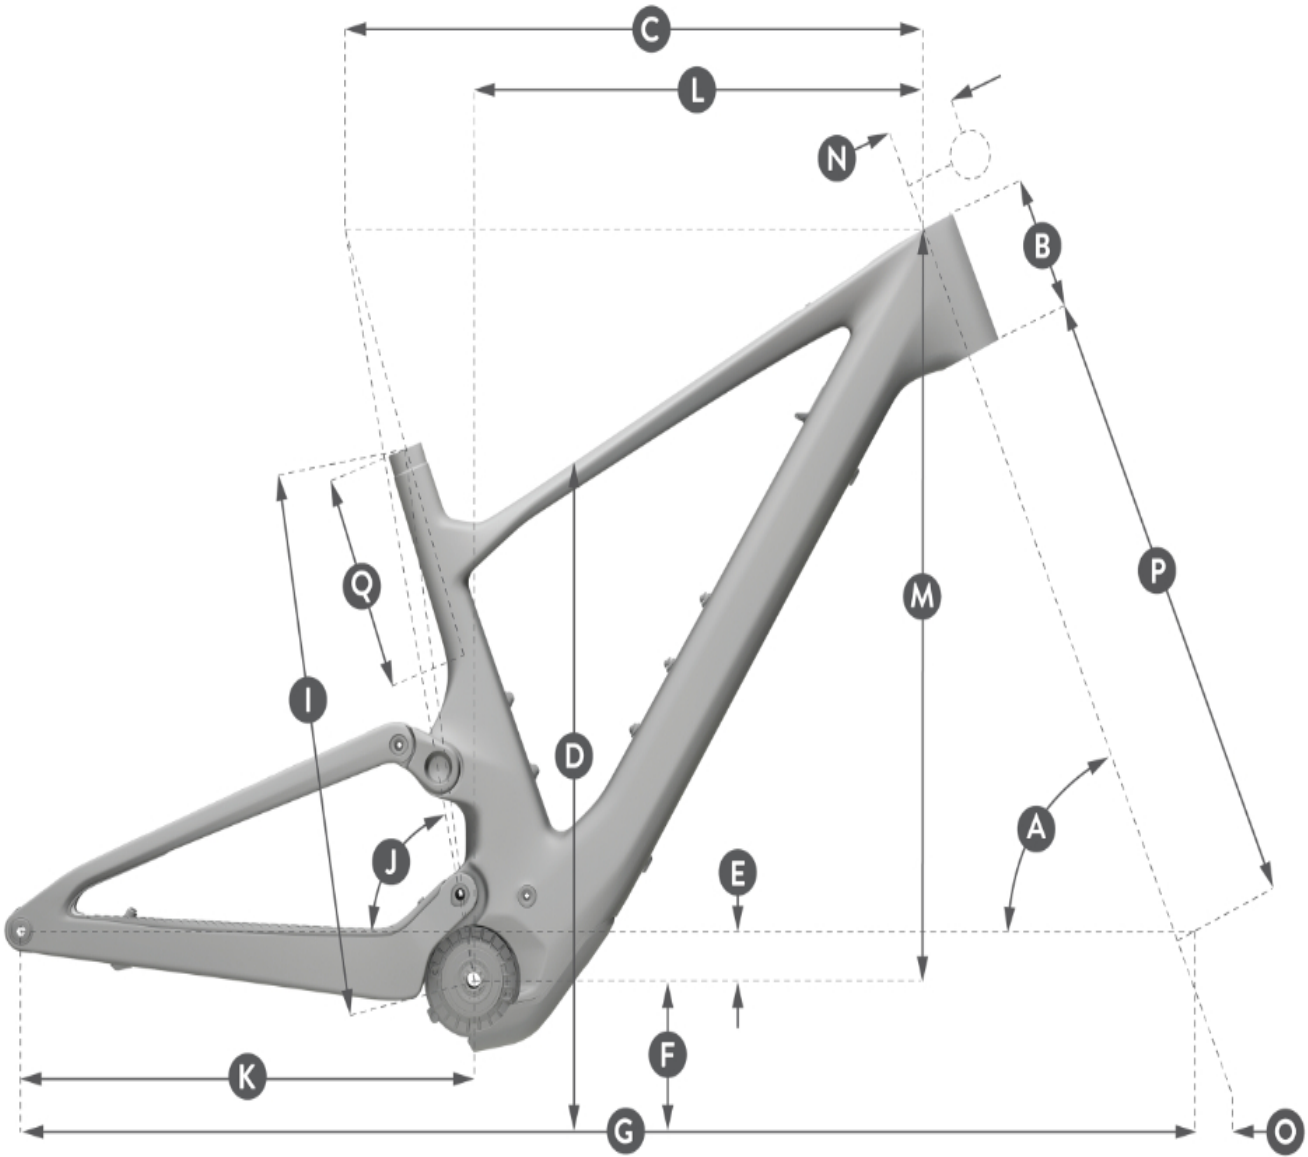

Geometrical Chart in MM

		S	M	L	XL
A	head tube angle / angle tube de direction	65.5 °	65.5 °	65.5 °	65.5 °
B	head tube length / hauteur tube de direction	110.0 mm	110.0 mm	120.0 mm	135.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	562.0 mm	589.0 mm	620.0 mm	645.0 mm
D	standover height / hauteur entre-jambes	765.0 mm	767.0 mm	780.0 mm	800.0 mm
E	BB offset / deport axe de pédalier	-38.5 mm	-38.5 mm	-38.5 mm	-38.5 mm
F	BB height / hauteur axe de pédalier	338.5 mm	338.5 mm	338.5 mm	338.5 mm
G	wheel base / entraxe roues	1,176.0 mm	1,206.0 mm	1,240.0 mm	1,270.0 mm

H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	415.0 mm	440.0 mm	480.0 mm	520.0 mm
J	seat angle / angle tube de selle	76.8 °	77.0 °	77.2 °	77.5 °
K	chainstay / longueur des bases	450.0 mm	450.0 mm	450.0 mm	450.0 mm
L	reach / reach	416.0 mm	446.0 mm	476.0 mm	501.0 mm
M	stack / stack	615.0 mm	615.0 mm	625.0 mm	638.0 mm
N	stem length / longueur potence	50.0 mm	60.0 mm	70.0 mm	70.0 mm
O	trail / chasse au sol	126.0 mm	126.0 mm	126.0 mm	126.0 mm
P	fork length / longueur fourche	540.0 mm	540.0 mm	540.0 mm	540.0 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	150.0 mm	175.0 mm	215.0 mm	255.0 mm
R	Crank Length / longueur de manivelle	170.0 mm	170.0 mm	175.0 mm	175.0 mm

Geometrical Chart in Inches

		S	M	L	XL
A	head tube angle / angle tube de direction	65.5 °	65.5 °	65.5 °	65.5 °
B	head tube length / hauteur tube de direction	4.3 in	4.3 in	4.7 in	5.3 in
C	top tube horizontal / longueur horizontale tube supérieur	22.1 in	23.2 in	24.4 in	25.4 in
D	standover height / hauteur entre-jambes	30.1 in	30.2 in	30.7 in	31.5 in
E	BB offset / deport axe de pédalier	-1.5 in	-1.5 in	-1.5 in	-1.5 in
F	BB height / hauteur axe de pédalier	13.3 in	13.3 in	13.3 in	13.3 in
G	wheel base / entraxe roues	46.3 in	47.5 in	48.8 in	50.0 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	16.3 in	17.3 in	18.9 in	20.5 in
J	seat angle / angle tube de selle	76.8 °	77.0 °	77.2 °	77.5 °
K	chainstay / longueur des bases	17.7 in	17.7 in	17.7 in	17.7 in
L	reach / reach	16.4 in	17.6 in	18.7 in	19.7 in
M	stack / stack	24.2 in	24.2 in	24.6 in	25.1 in
N	stem length / longueur potence	2.0 in	2.4 in	2.8 in	2.8 in
O	trail / chasse au sol	5.0 in	5.0 in	5.0 in	5.0 in
P	fork length / longueur fourche	21.3 in	21.3 in	21.3 in	21.3 in
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	5.9 in	6.9 in	8.5 in	10.0 in
R	Crank Length / longueur de manivelle	6.7 in	6.7 in	6.9 in	6.9 in