


2026 Scott Scale 970 Grey Bike - Geometry

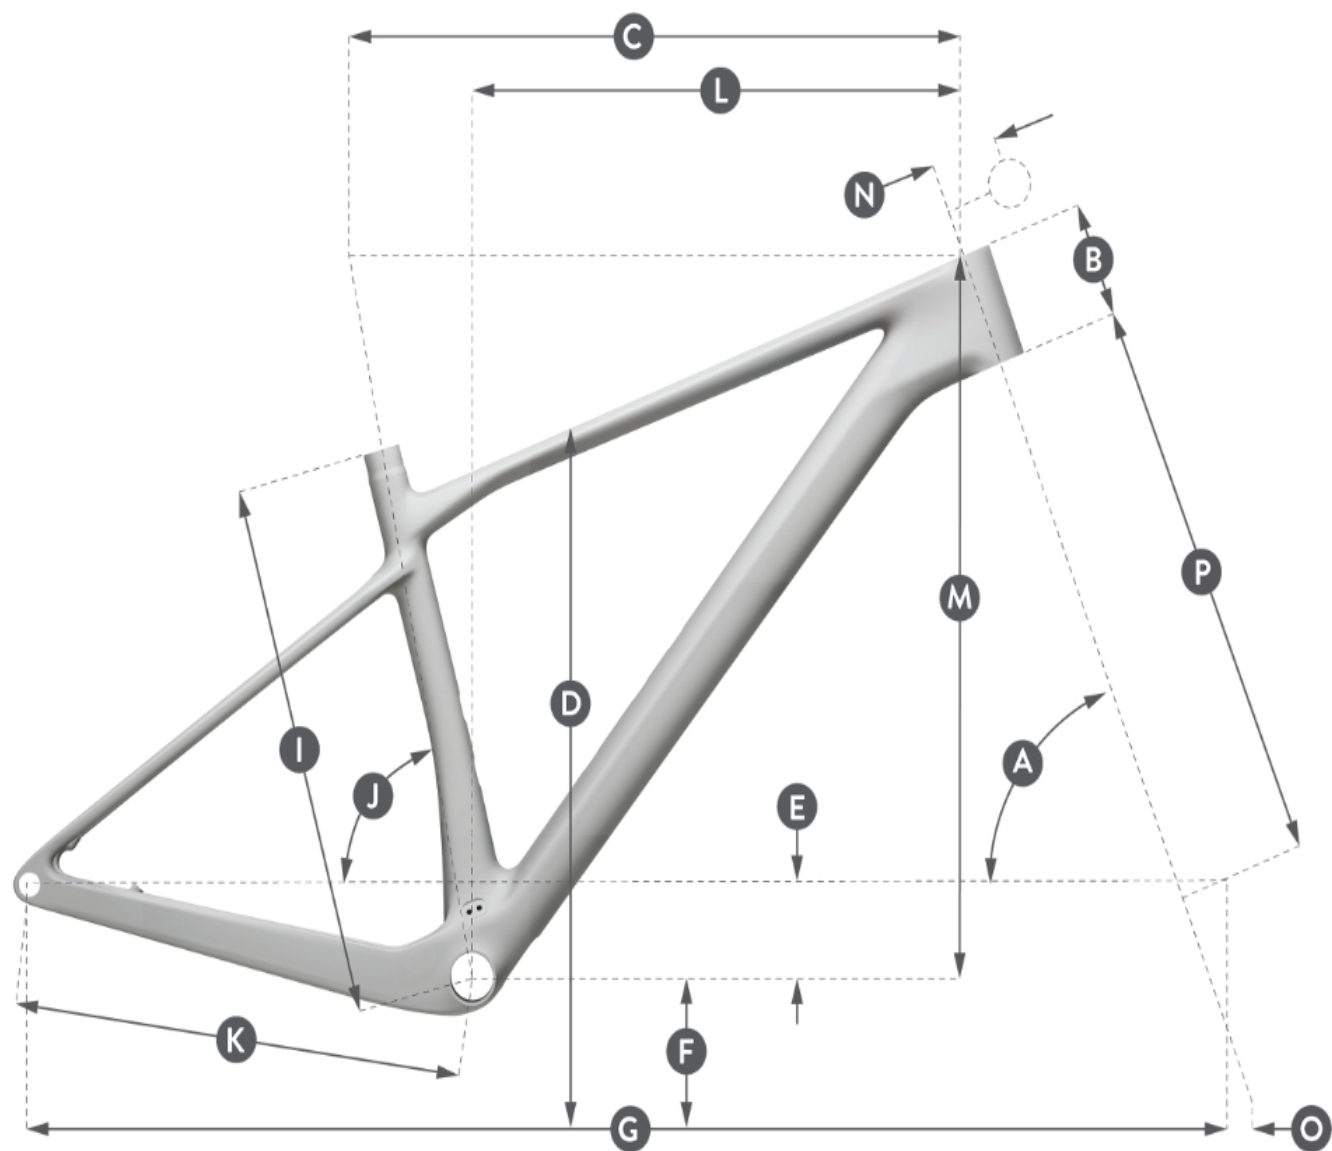

Geometrical Chart in MM

		XS	S	M	L	XL	XXL
A	head tube angle / angle tube de direction	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °
B	head tube length / hauteur tube de direction	90.0 mm	90.0 mm	100.0 mm	110.0 mm	120.0 mm	120.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	555.0 mm	575.0 mm	600.0 mm	625.0 mm	655.0 mm	675.0 mm
D	standover height / hauteur entre-jambes	745.0 mm	755.0 mm	786.0 mm	805.0 mm	835.0 mm	870.0 mm
E	BB offset / deport axe de pédalier	-60.0 mm	-60.0 mm	-60.0 mm	-60.0 mm	-60.0 mm	-60.0 mm
F	BB height / hauteur axe de pédalier	315.0 mm	315.0 mm	315.0 mm	315.0 mm	315.0 mm	315.0 mm

G	wheel base / entraxe roues	1,091.4 mm	1,111.8 mm	1,138.2 mm	1,164.6 mm	1,195.9 mm	1,215.9 mm
H	BB center to toptube center / dist. boitier - milieu tube supérieur						
I	BB center to top of seattube / dist. boitier - sommet tube de selle	360.0 mm	390.0 mm	440.0 mm	480.0 mm	530.0 mm	580.0 mm
J	seat angle / angle tube de selle	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °
K	chainstay / longueur des bases	425.0 mm	425.0 mm	425.0 mm	425.0 mm	425.0 mm	425.0 mm
L	reach / reach	400.3 mm	420.3 mm	442.8 mm	463.3 mm	492.9 mm	512.9 mm
M	stack / stack	596.1 mm	596.1 mm	605.3 mm	614.6 mm	623.8 mm	623.8 mm
N	stem length / longueur potence	50.0 mm	50.0 mm	60.0 mm	70.0 mm	80.0 mm	80.0 mm
O	trail / chasse au sol	506.0 mm	112.6 mm	112.6 mm	112.6 mm	112.6 mm	
P	fork length / longueur fourche	160.0 mm	506.0 mm	506.0 mm	506.0 mm	506.0 mm	112.6 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	160.0 mm	210.0 mm	250.0 mm	300.0 mm	506.0 mm	
R	Crank Length / longueur de manivelle	170.0 mm	170.0 mm	175.0 mm	175.0 mm	350.0 mm	

Geometrical Chart in Inches

		XS	S	M	L	XL	XXL
A	head tube angle / angle tube de direction	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °
B	head tube length / hauteur tube de direction	3.5 in	3.5 in	3.9 in	4.3 in	4.7 in	4.7 in
C	top tube horizontal / longueur horizontale tube supérieur	21.9 in	22.6 in	23.6 in	24.6 in	25.8 in	26.6 in
D	standover height / hauteur entre-jambes	29.3 in	29.7 in	30.9 in	31.7 in	32.9 in	34.3 in
E	BB offset / deport axe de pédalier	-2.4 in	-2.4 in	-2.4 in	-2.4 in	-2.4 in	-2.4 in
F	BB height / hauteur axe de pédalier	12.4 in	12.4 in	12.4 in	12.4 in	12.4 in	12.4 in
G	wheel base / entraxe roues	43.0 in	43.8 in	44.8 in	45.8 in	47.1 in	47.9 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur						
I	BB center to top of seattube / dist. boitier - sommet tube de selle	14.2 in	15.4 in	17.3 in	18.9 in	20.9 in	22.8 in
J	seat angle / angle tube de selle	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °
K	chainstay / longueur des bases	16.7 in	16.7 in	16.7 in	16.7 in	16.7 in	16.7 in

L	reach / reach	15.8 in	16.5 in	17.4 in	18.2 in	19.4 in	20.2 in
M	stack / stack	23.5 in	23.5 in	23.8 in	24.2 in	24.6 in	24.6 in
N	stem length / longueur potence	2.0 in	2.0 in	2.4 in	2.8 in	3.1 in	3.1 in
O	trail / chasse au sol	19.9 in	4.4 in	4.4 in	4.4 in	4.4 in	
P	fork length / longueur fourche	19.9 in	19.9 in	19.9 in	19.9 in		
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	6.3 in	8.3 in	9.8 in	11.8 in		
R	Crank Length / longueur de manivelle	6.7 in	6.7 in	6.9 in	6.9 in		