


# 2026 Scott Scale RC Team Bike - Carbon Black - Geometry

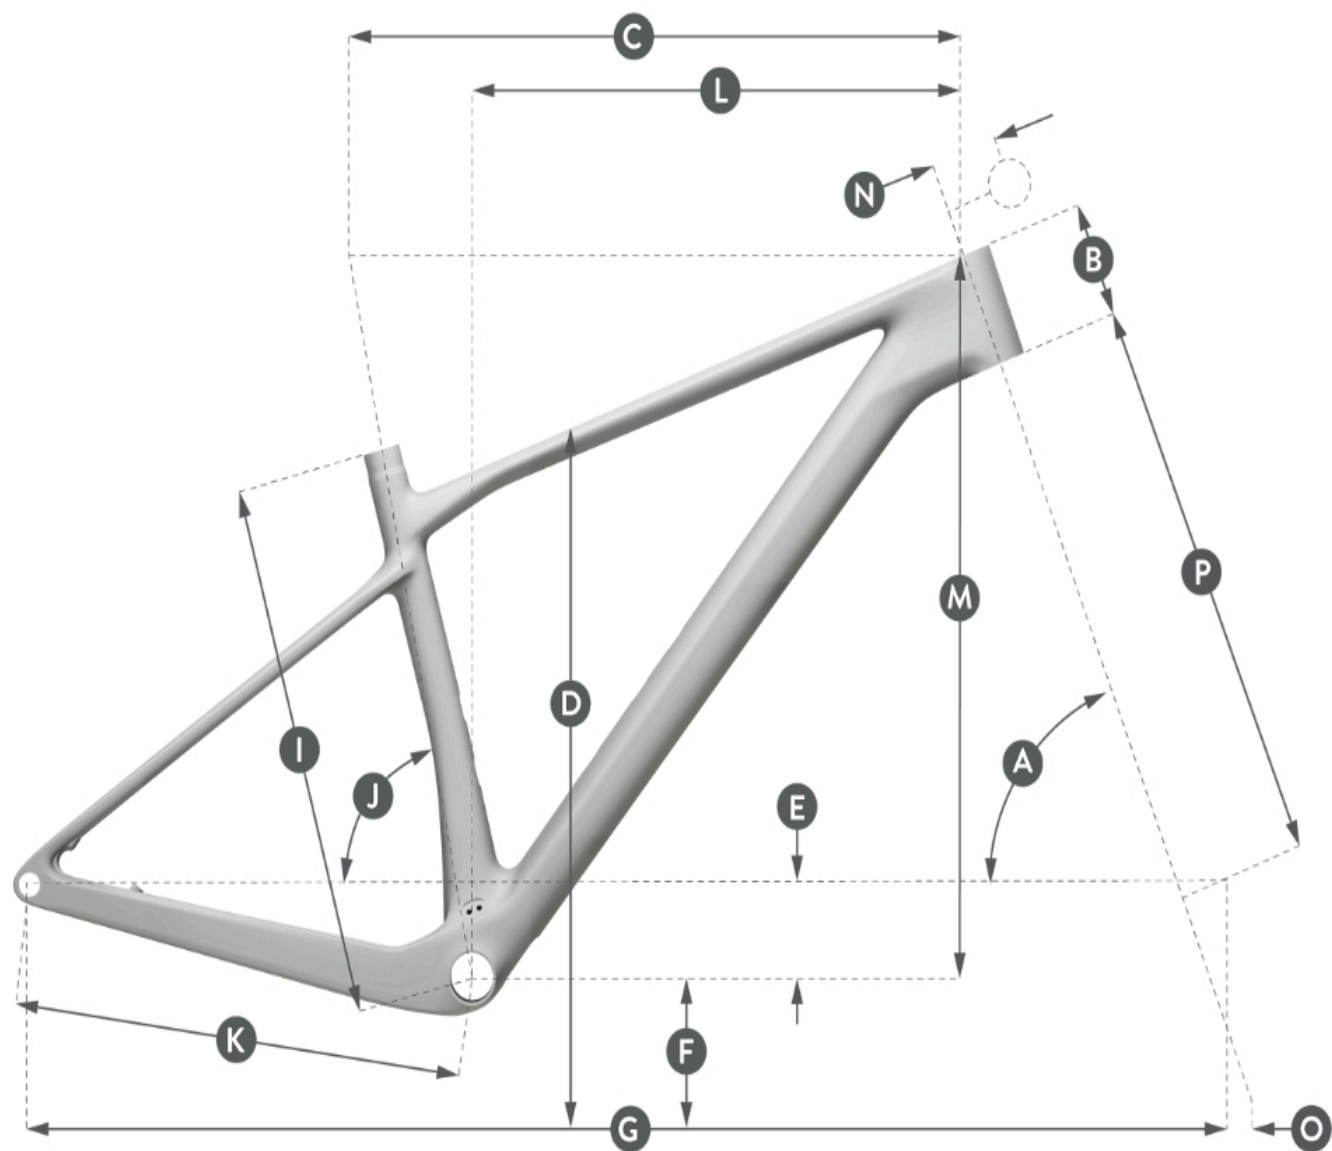

## Geometrical Chart in MM

|   |                                                                     | S          | M          | L          | XL         |
|---|---------------------------------------------------------------------|------------|------------|------------|------------|
| A | head tube angle / angle tube de direction                           | 67.9 °     | 67.9 °     | 67.9 °     | 67.9 °     |
| B | head tube length / hauteur tube de direction                        | 90.0 mm    | 95.0 mm    | 110.0 mm   | 120.0 mm   |
| C | top tube horizontal / longueur horizontale tube supérieur           | 575.0 mm   | 600.2 mm   | 626.0 mm   | 656.5 mm   |
| D | standover height / hauteur entre-jambes                             | 752.0 mm   | 781.0 mm   | 800.0 mm   | 835.1 mm   |
| E | BB offset / deport axe de pédalier                                  | -62.0 mm   | -62.0 mm   | -62.0 mm   | -62.0 mm   |
| F | BB height / hauteur axe de pédalier                                 | 313.0 mm   | 313.0 mm   | 313.0 mm   | 313.0 mm   |
| G | wheel base / entraxe roues                                          | 1,105.4 mm | 1,131.1 mm | 1,158.0 mm | 1,189.4 mm |
| H | BB center to toptube center / dist. boîtier - milieu tube supérieur |            |            |            |            |

|   |                                                                     |          |          |          |          |
|---|---------------------------------------------------------------------|----------|----------|----------|----------|
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 390.0 mm | 440.0 mm | 480.0 mm | 530.0 mm |
| J | seat angle / angle tube de selle                                    | 75.4 °   | 75.4 °   | 75.3 °   | 75.3 °   |
| K | chainstay / longueur des bases                                      | 425.0 mm | 425.0 mm | 425.0 mm | 425.0 mm |
| L | reach / reach                                                       | 418.5 mm | 442.3 mm | 463.6 mm | 491.2 mm |
| M | stack / stack                                                       | 600.3 mm | 604.9 mm | 618.9 mm | 628.1 mm |
| N | stem length / longueur potence                                      | 50.0 mm  | 60.0 mm  | 70.0 mm  | 80.0 mm  |
| O | trail / chasse au sol                                               | 105.0 mm | 105.0 mm | 105.0 mm | 105.0 mm |
| P | fork length / longueur fourche                                      | 506.0 mm | 506.0 mm | 506.0 mm | 506.0 mm |
| Q | Maximum Seatpost Insertion / Insertion maximale de la tige de selle | 160.0 mm | 210.0 mm | 250.0 mm | 300.0 mm |
| R | Crank Length / longueur de manivelle                                | 170.0 mm | 170.0 mm | 175.0 mm | 175.0 mm |

## Geometrical Chart in Inches

|   |                                                                     | S       | M       | L       | XL      |
|---|---------------------------------------------------------------------|---------|---------|---------|---------|
| A | head tube angle / angle tube de direction                           | 67.9 °  | 67.9 °  | 67.9 °  | 67.9 °  |
| B | head tube length / hauteur tube de direction                        | 3.5 in  | 3.7 in  | 4.3 in  | 4.7 in  |
| C | top tube horizontal / longueur horizontale tube supérieur           | 22.6 in | 23.6 in | 24.6 in | 25.8 in |
| D | standover height / hauteur entre-jambes                             | 29.6 in | 30.7 in | 31.5 in | 32.9 in |
| E | BB offset / deport axe de pédalier                                  | -2.4 in | -2.4 in | -2.4 in | -2.4 in |
| F | BB height / hauteur axe de pédalier                                 | 12.3 in | 12.3 in | 12.3 in | 12.3 in |
| G | wheel base / entraxe roues                                          | 43.5 in | 44.5 in | 45.6 in | 46.8 in |
| H | BB center to toptube center / dist. boitier - milieu tube supérieur |         |         |         |         |
| I | BB center to top of seattube / dist. boitier - sommet tube de selle | 15.4 in | 17.3 in | 18.9 in | 20.9 in |
| J | seat angle / angle tube de selle                                    | 75.4 °  | 75.4 °  | 75.3 °  | 75.3 °  |
| K | chainstay / longueur des bases                                      | 16.7 in | 16.7 in | 16.7 in | 16.7 in |
| L | reach / reach                                                       | 16.5 in | 17.4 in | 18.3 in | 19.3 in |
| M | stack / stack                                                       | 23.6 in | 23.8 in | 24.4 in | 24.7 in |
| N | stem length / longueur potence                                      | 2.0 in  | 2.4 in  | 2.8 in  | 3.1 in  |
| O | trail / chasse au sol                                               | 4.1 in  | 4.1 in  | 4.1 in  | 4.1 in  |
| P | fork length / longueur fourche                                      | 19.9 in | 19.9 in | 19.9 in | 19.9 in |
| Q | Maximum Seatpost Insertion / Insertion maximale de la tige de selle | 6.3 in  | 8.3 in  | 9.8 in  | 11.8 in |
| R | Crank Length / longueur de manivelle                                | 6.7 in  | 6.7 in  | 6.9 in  | 6.9 in  |