


2026 Scott Scale RC World Cup Bike - Carbon Black - Geometry

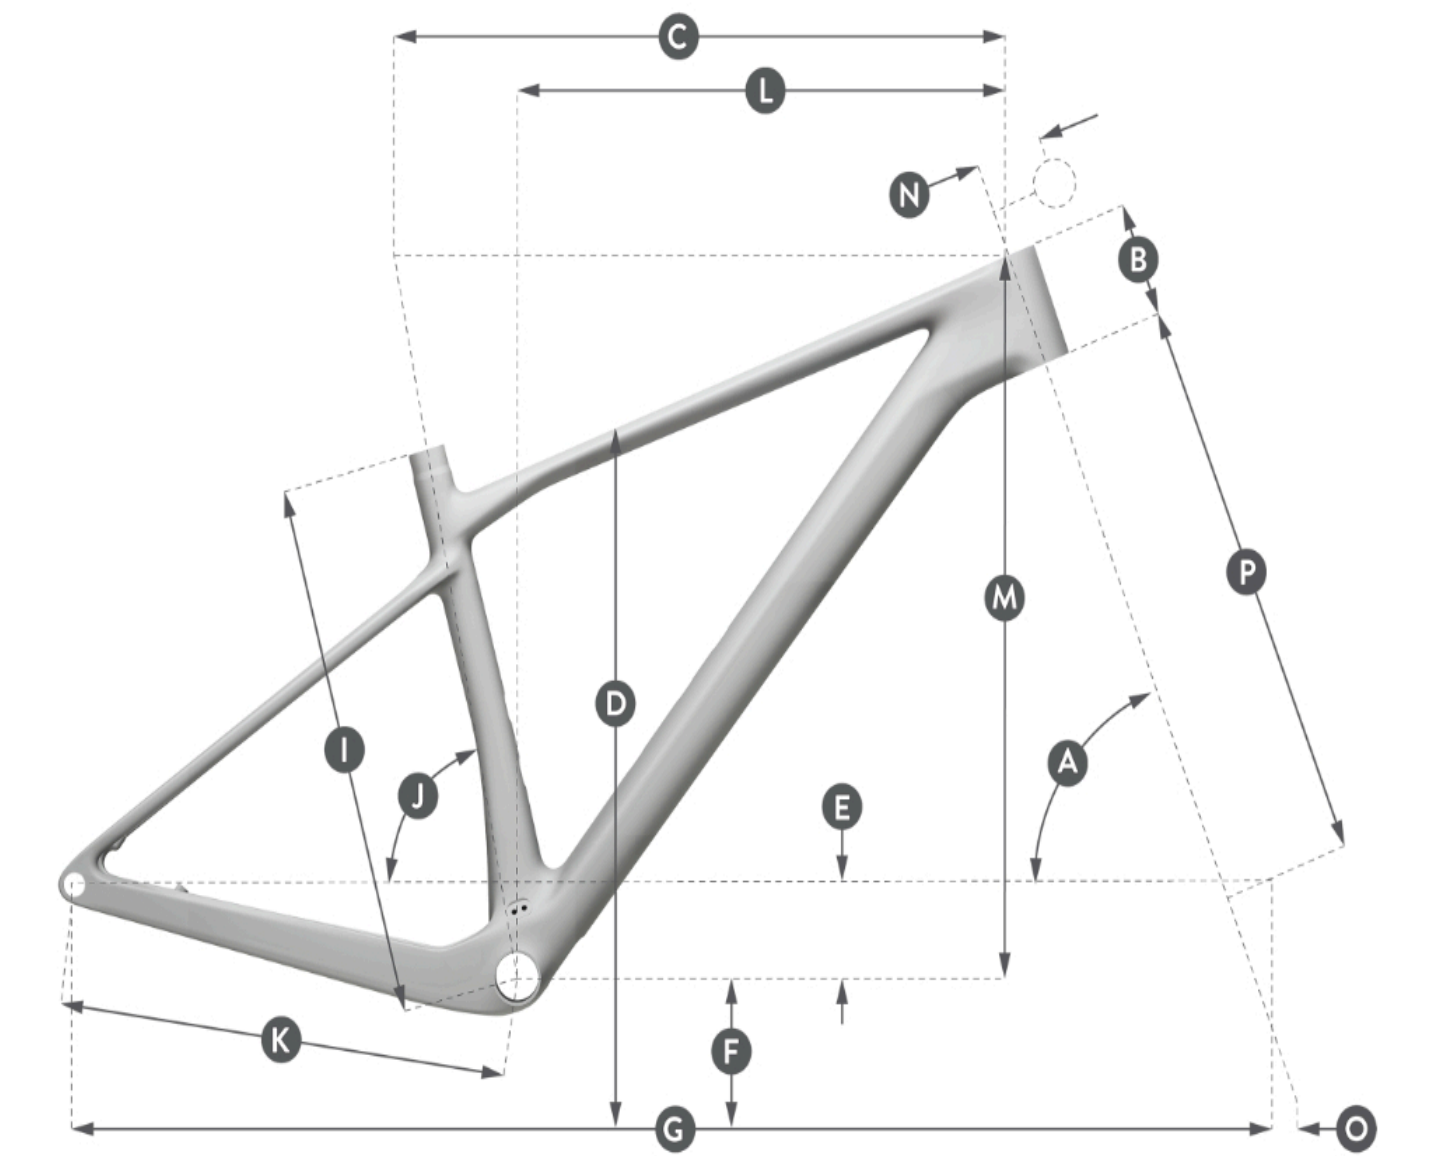

Geometrical Chart in MM

		S	M	L	XL
A	head tube angle / angle tube de direction	67.9 °	67.9 °	67.9 °	67.9 °
B	head tube length / hauteur tube de direction	90.0 mm	95.0 mm	110.0 mm	120.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	575.0 mm	600.2 mm	626.0 mm	656.5 mm
D	standover height / hauteur entre-jambes	752.0 mm	781.0 mm	800.0 mm	835.1 mm
E	BB offset / deport axe de pédalier	-62.0 mm	-62.0 mm	-62.0 mm	-62.0 mm
F	BB height / hauteur axe de pédalier	313.0 mm	313.0 mm	313.0 mm	313.0 mm
G	wheel base / entraxe roues	1,105.4 mm	1,131.1 mm	1,158.0 mm	1,189.4 mm
H	BB center to toptube center / dist. boîtier - milieu tube supérieur				

I	BB center to top of seattube / dist. boitier - sommet tube de selle	390.0 mm	440.0 mm	480.0 mm	530.0 mm
J	seat angle / angle tube de selle	75.4 °	75.4 °	75.3 °	75.3 °
K	chainstay / longueur des bases	425.0 mm	425.0 mm	425.0 mm	425.0 mm
L	reach / reach	418.5 mm	442.3 mm	463.6 mm	491.2 mm
M	stack / stack	600.3 mm	604.9 mm	618.9 mm	628.1 mm
N	stem length / longueur potence	50.0 mm	60.0 mm	70.0 mm	80.0 mm
O	trail / chasse au sol	105.0 mm	105.0 mm	105.0 mm	105.0 mm
P	fork length / longueur fourche	506.0 mm	506.0 mm	506.0 mm	506.0 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	160.0 mm	210.0 mm	250.0 mm	300.0 mm
R	Crank Length / longueur de manivelle	170.0 mm	170.0 mm	175.0 mm	175.0 mm

Geometrical Chart in Inches

		S	M	L	XL
A	head tube angle / angle tube de direction	67.9 °	67.9 °	67.9 °	67.9 °
B	head tube length / hauteur tube de direction	3.5 in	3.7 in	4.3 in	4.7 in
C	top tube horizontal / longueur horizontale tube supérieur	22.6 in	23.6 in	24.6 in	25.8 in
D	standover height / hauteur entre-jambes	29.6 in	30.7 in	31.5 in	32.9 in
E	BB offset / deport axe de pédalier	-2.4 in	-2.4 in	-2.4 in	-2.4 in
F	BB height / hauteur axe de pédalier	12.3 in	12.3 in	12.3 in	12.3 in
G	wheel base / entraxe roues	43.5 in	44.5 in	45.6 in	46.8 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	15.4 in	17.3 in	18.9 in	20.9 in
J	seat angle / angle tube de selle	75.4 °	75.4 °	75.3 °	75.3 °
K	chainstay / longueur des bases	16.7 in	16.7 in	16.7 in	16.7 in
L	reach / reach	16.5 in	17.4 in	18.3 in	19.3 in
M	stack / stack	23.6 in	23.8 in	24.4 in	24.7 in
N	stem length / longueur potence	2.0 in	2.4 in	2.8 in	3.1 in
O	trail / chasse au sol	4.1 in	4.1 in	4.1 in	4.1 in
P	fork length / longueur fourche	19.9 in	19.9 in	19.9 in	19.9 in
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	6.3 in	8.3 in	9.8 in	11.8 in
R	Crank Length / longueur de manivelle	6.7 in	6.7 in	6.9 in	6.9 in