


2026 Scott Spark RC World Cup Evo Bike - Carbon Black - Geometry

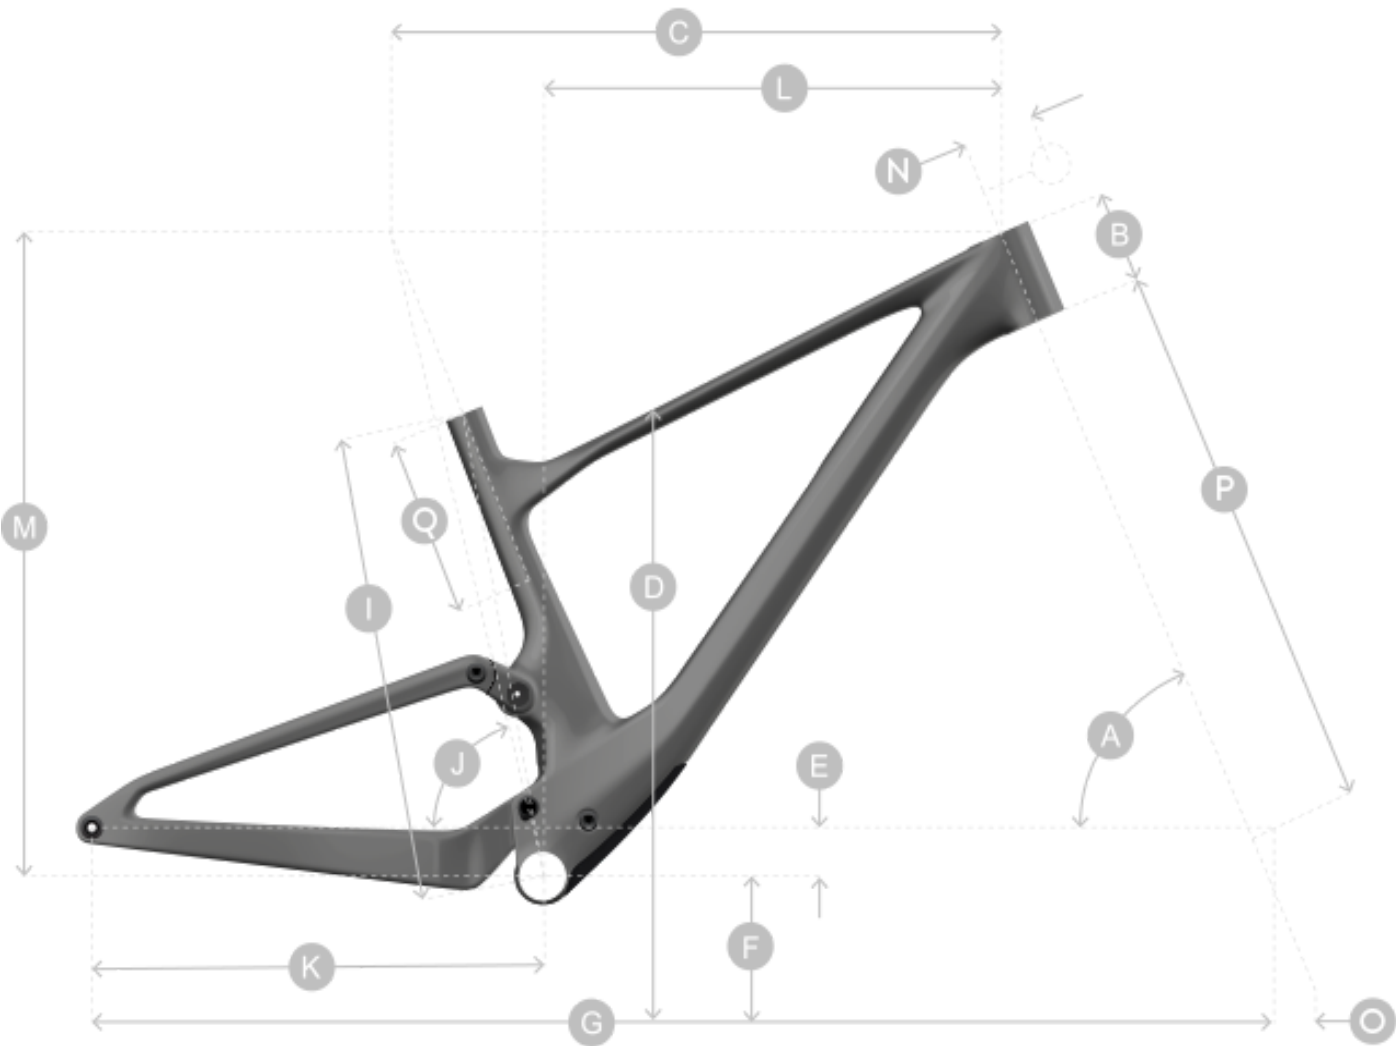

Geometrical Chart in MM

		S	M	L	XL
A	head tube angle / angle tube de direction	67.2 °	67.2 °	67.2 °	67.2 °
B	head tube length / hauteur tube de direction	90.0 mm	90.0 mm	105.0 mm	115.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	562.0 mm	590.0 mm	614.0 mm	642.0 mm
D	standover height / hauteur entre-jambes	758.0 mm	765.0 mm	776.0 mm	799.0 mm
E	BB offset / deport axe de pédalier	-45.0 mm	-45.0 mm	-45.0 mm	-45.0 mm
F	BB height / hauteur axe de pédalier	330.0 mm	330.0 mm	330.0 mm	330.0 mm
G	wheel base / entraxe roues	1,129.0 mm	1,159.0 mm	1,190.0 mm	1,231.0 mm
H	BB center to toptube center / dist. boîtier - milieu tube supérieur				

I	BB center to top of seattube / dist. boitier - sommet tube de selle	415.0 mm	440.0 mm	490.0 mm	540.0 mm
J	seat angle / angle tube de selle	75.9 °	76.1 °	76.6 °	76.9 °
K	chainstay / longueur des bases	437.5 mm	437.5 mm	437.5 mm	437.5 mm
L	reach / reach	411.0 mm	441.0 mm	471.0 mm	501.0 mm
M	stack / stack	602.5 mm	602.5 mm	616.0 mm	625.0 mm
N	stem length / longueur potence	50.0 mm	60.0 mm	70.0 mm	80.0 mm
O	trail / chasse au sol	115.0 mm	115.0 mm	115.0 mm	115.0 mm
P	fork length / longueur fourche	530.0 mm	530.0 mm	530.0 mm	530.0 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	150.0 mm	175.0 mm	225.0 mm	275.0 mm
R	Crank Length / longueur de manivelle	170.0 mm	170.0 mm	175.0 mm	175.0 mm

Geometrical Chart in Inches

		S	M	L	XL
A	head tube angle / angle tube de direction	67.2 °	67.2 °	67.2 °	67.2 °
B	head tube length / hauteur tube de direction	3.5 in	3.5 in	4.1 in	4.5 in
C	top tube horizontal / longueur horizontale tube supérieur	22.1 in	23.2 in	24.2 in	25.3 in
D	standover height / hauteur entre-jambes	29.8 in	30.1 in	30.6 in	31.5 in
E	BB offset / deport axe de pédalier	-1.8 in	-1.8 in	-1.8 in	-1.8 in
F	BB height / hauteur axe de pédalier	13.0 in	13.0 in	13.0 in	13.0 in
G	wheel base / entraxe roues	44.4 in	45.6 in	46.9 in	48.5 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	16.3 in	17.3 in	19.3 in	21.3 in
J	seat angle / angle tube de selle	75.9 °	76.1 °	76.6 °	76.9 °
K	chainstay / longueur des bases	17.2 in	17.2 in	17.2 in	17.2 in
L	reach / reach	16.2 in	17.4 in	18.5 in	19.7 in
M	stack / stack	23.7 in	23.7 in	24.3 in	24.6 in
N	stem length / longueur potence	2.0 in	2.4 in	2.8 in	3.1 in
O	trail / chasse au sol	4.5 in	4.5 in	4.5 in	4.5 in
P	fork length / longueur fourche	20.9 in	20.9 in	20.9 in	20.9 in
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	5.9 in	6.9 in	8.9 in	10.8 in
R	Crank Length / longueur de manivelle	6.7 in	6.7 in	6.9 in	6.9 in