


2026 Scott Voltage 900 Tuned Bike - Carbon Black/Pastel White - Geometry

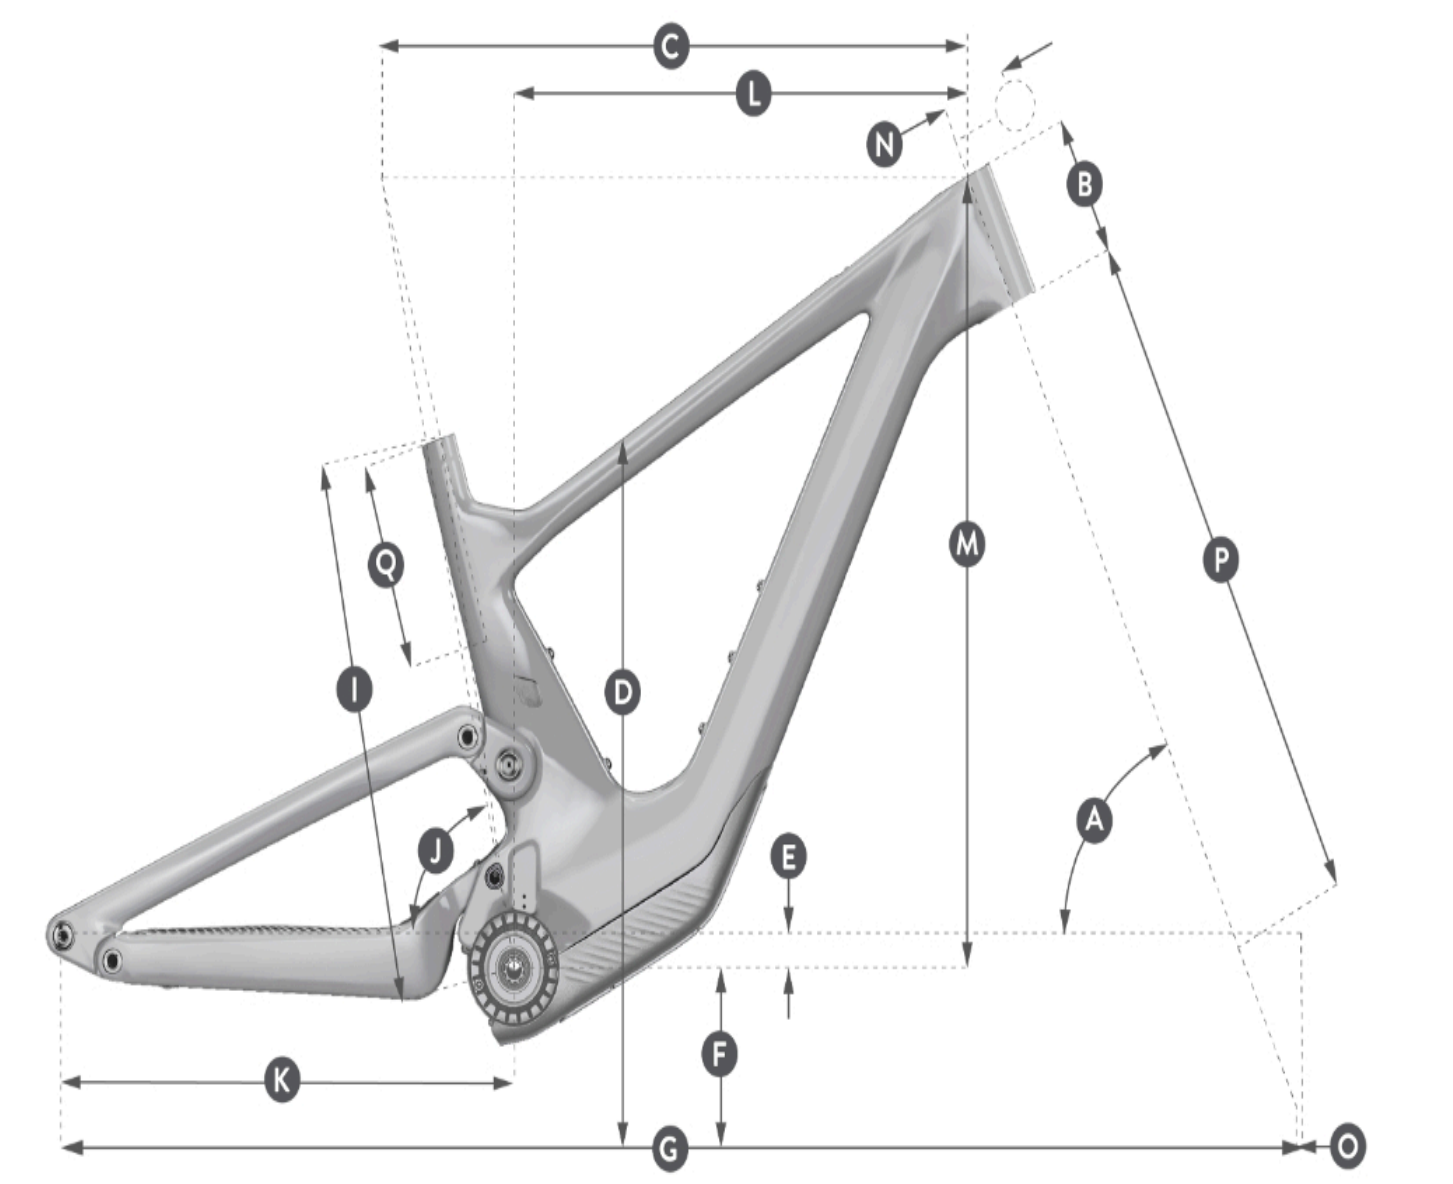

Geometrical Chart in MM

		S	M	L	XL
A	head tube angle / angle tube de direction	63.9 °	63.9 °	63.9 °	63.9 °
B	head tube length / hauteur tube de direction	110.0 mm	110.0 mm	120.0 mm	130.0 mm
C	top tube horizontal / longueur horizontale tube supérieur	580.2 mm	600.0 mm	629.9 mm	659.8 mm
D	standover height / hauteur entre-jambes	765.0 mm	765.0 mm	772.0 mm	788.0 mm
E	BB offset / deport axe de pédalier	27.4 mm	27.5 mm	27.4 mm	27.3 mm
F	BB height / hauteur axe de pédalier	349.6 mm	349.5 mm	349.6 mm	349.7 mm
G	wheel base / entraxe roues	1,232.8 mm	1,252.6 mm	1,284.8 mm	1,316.9 mm

H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	404.6 mm	424.5 mm	449.6 mm	479.7 mm
J	seat angle / angle tube de selle	77.1 °	77.1 °	77.1 °	77.1 °
K	chainstay / longueur des bases	455.0 mm	455.0 mm	455.0 mm	455.0 mm
L	reach / reach	437.4 mm	457.2 mm	485.0 mm	512.7 mm
M	stack / stack	622.3 mm	622.4 mm	631.3 mm	640.2 mm
N	stem length / longueur potence	40.0 mm	40.0 mm	50.0 mm	50.0 mm
O	trail / chasse au sol	135.7 mm	135.7 mm	135.7 mm	135.7 mm
P	fork length / longueur fourche	571.0 mm	571.0 mm	571.0 mm	571.0 mm
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	190.0 mm	210.0 mm	235.0 mm	265.0 mm
R	Crank Length / longueur de manivelle	170.0 mm	170.0 mm	175.0 mm	175.0 mm

Geometrical Chart in Inches

		S	M	L	XL
A	head tube angle / angle tube de direction	63.9 °	63.9 °	63.9 °	63.9 °
B	head tube length / hauteur tube de direction	4.3 in	4.3 in	4.7 in	5.1 in
C	top tube horizontal / longueur horizontale tube supérieur	22.8 in	23.6 in	24.8 in	26.0 in
D	standover height / hauteur entre-jambes	30.1 in	30.1 in	30.4 in	31.0 in
E	BB offset / deport axe de pédalier	1.1 in	1.1 in	1.1 in	1.1 in
F	BB height / hauteur axe de pédalier	13.8 in	13.8 in	13.8 in	13.8 in
G	wheel base / entraxe roues	48.5 in	49.3 in	50.6 in	51.8 in
H	BB center to toptube center / dist. boitier - milieu tube supérieur				
I	BB center to top of seattube / dist. boitier - sommet tube de selle	15.9 in	16.7 in	17.7 in	18.9 in
J	seat angle / angle tube de selle	77.1 °	77.1 °	77.1 °	77.1 °
K	chainstay / longueur des bases	17.9 in	17.9 in	17.9 in	17.9 in
L	reach / reach	17.2 in	18.0 in	19.1 in	20.2 in
M	stack / stack	24.5 in	24.5 in	24.9 in	25.2 in
N	stem length / longueur potence	1.6 in	1.6 in	2.0 in	2.0 in
O	trail / chasse au sol	5.3 in	5.3 in	5.3 in	5.3 in
P	fork length / longueur fourche	22.5 in	22.5 in	22.5 in	22.5 in
Q	Maximum Seatpost Insertion / Insertion maximale de la tige de selle	7.5 in	8.3 in	9.3 in	10.4 in
R	Crank Length / longueur de manivelle	6.7 in	6.7 in	6.9 in	6.9 in